

Artemide®


ILIO CEILING 36 - 45

design
Ernesto Gismondi







i

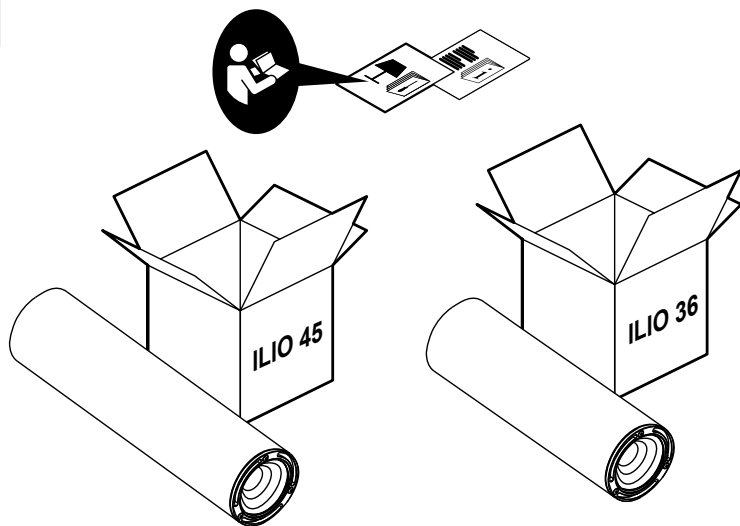


1

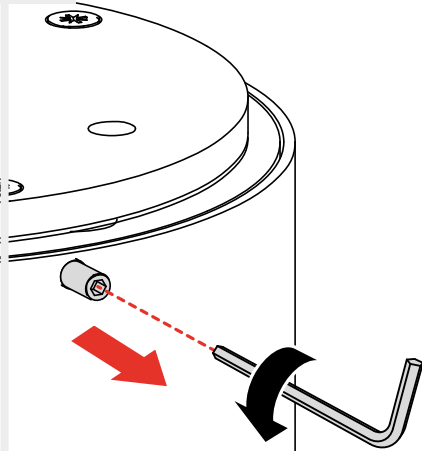


2



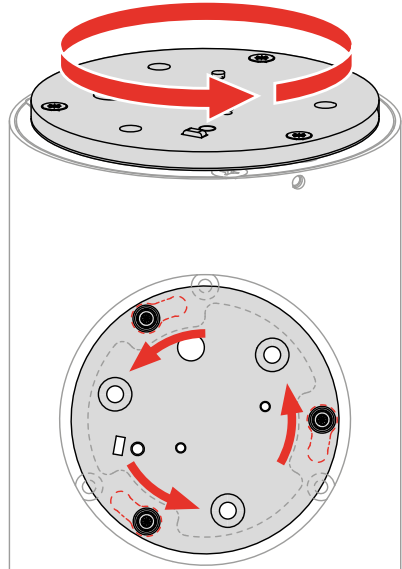


3

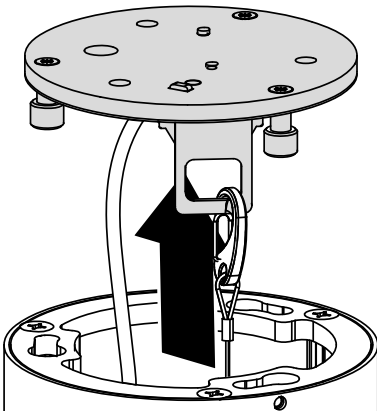








4

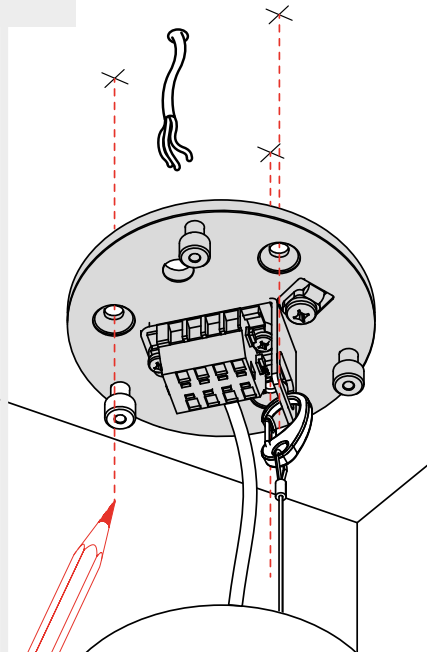

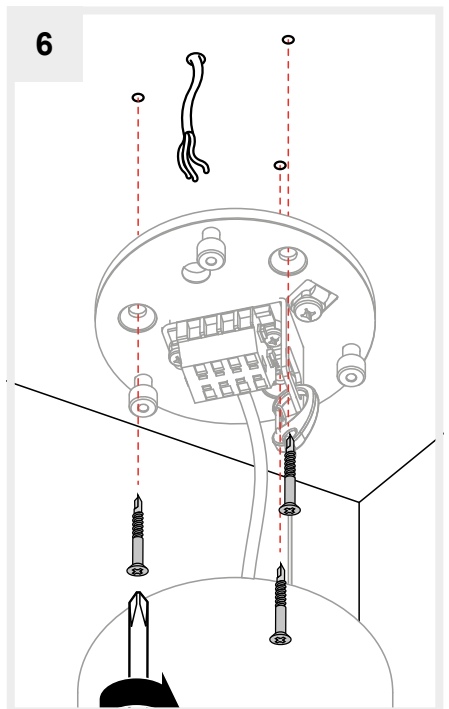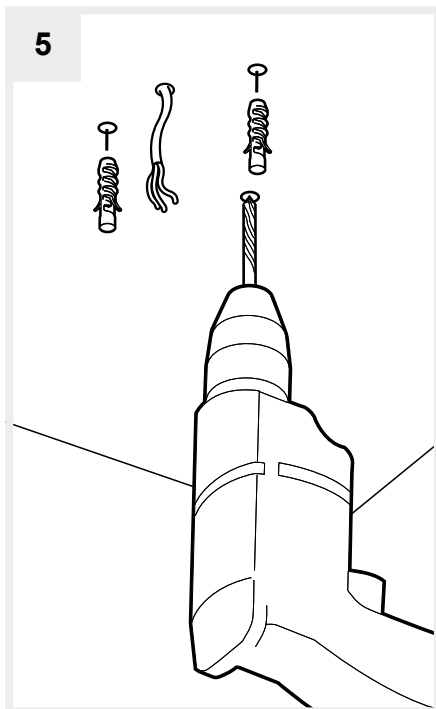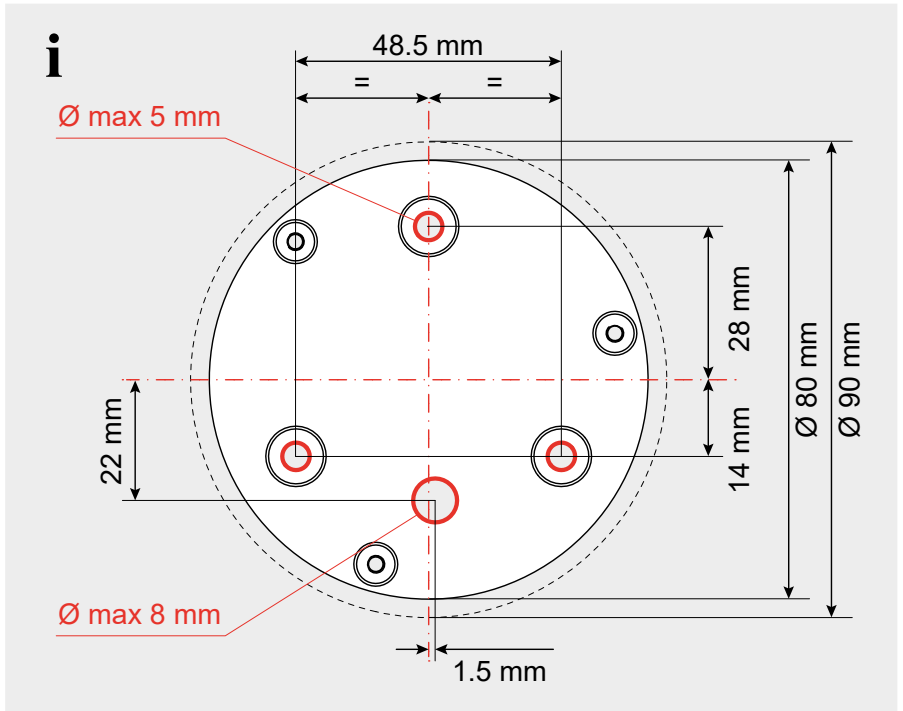


i


	CODE	POWER [W]	Inrush current [A]	Inrush current time [μ sec]	Nr. of power units under same MCB			
					B16A	C16A	B10A	C20A
fig.7	1756XXXAPP 1757XXXAPP	12,5	10	200	21	42	15	61
fig.8	1756XXXA 1757XXXA	12,5	30	100	21	42	15	61

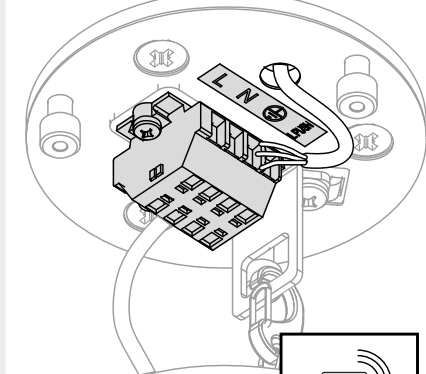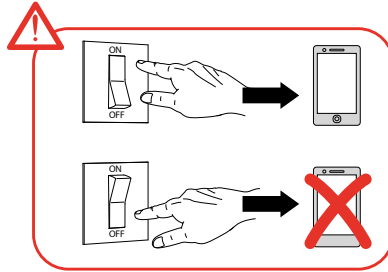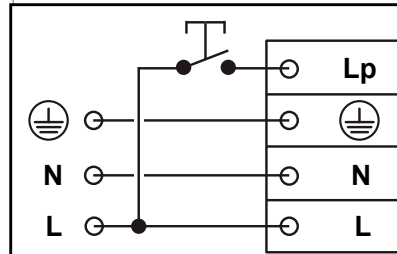7**PUSH**


8

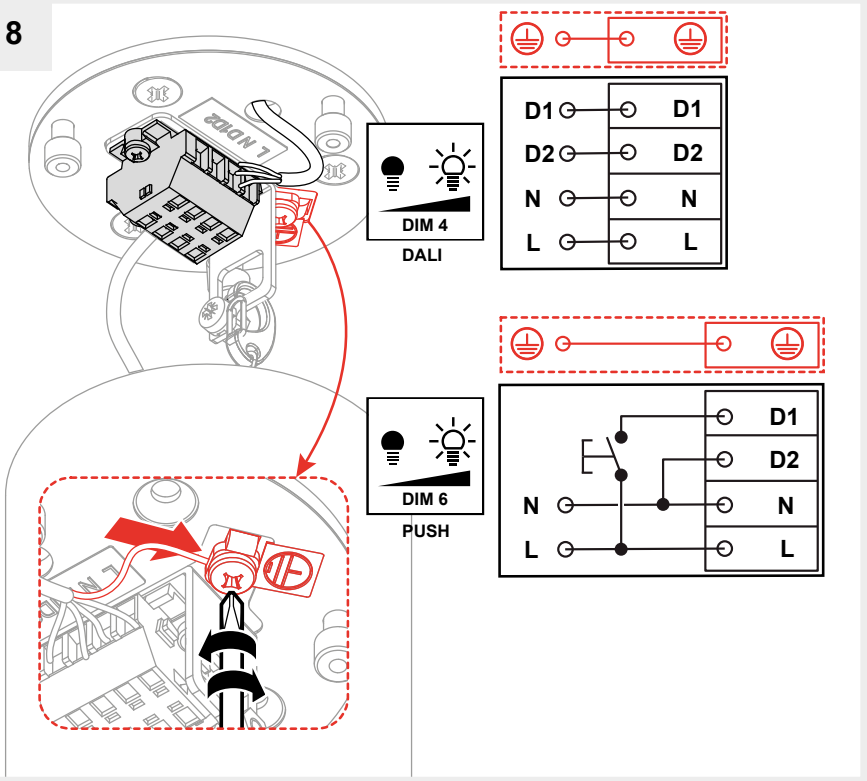





9

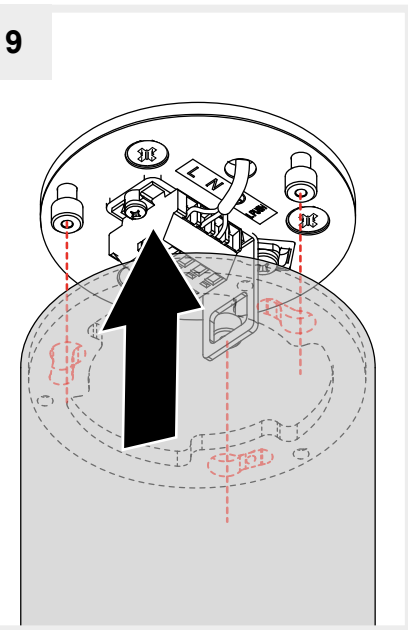


10

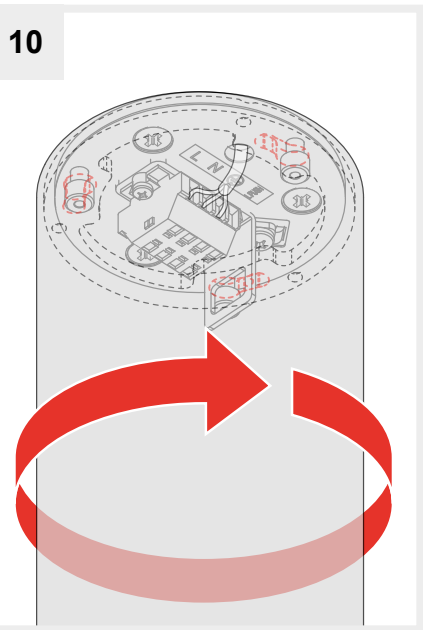

11

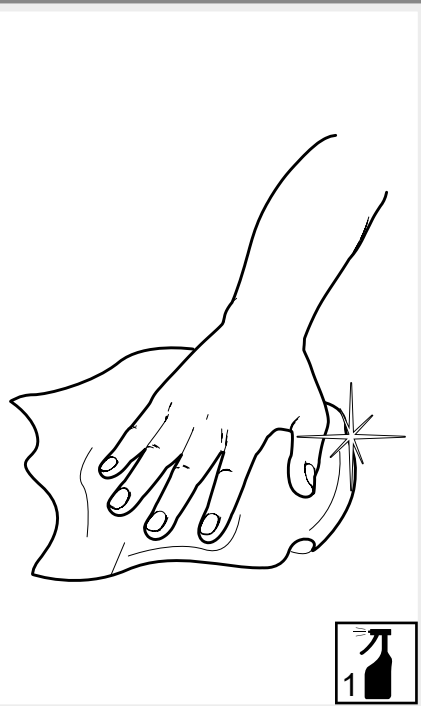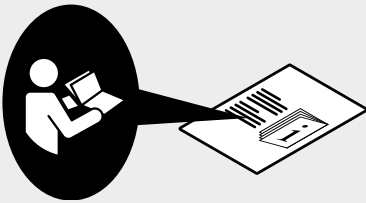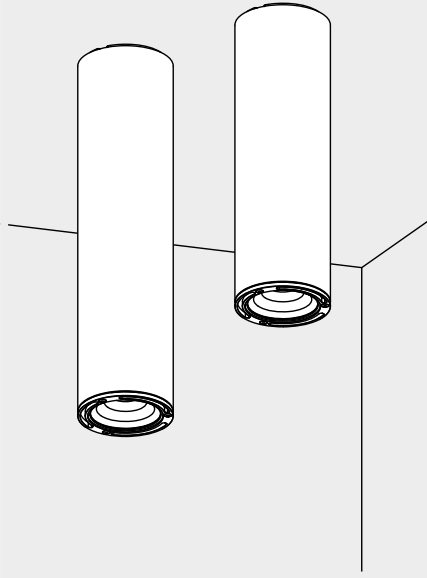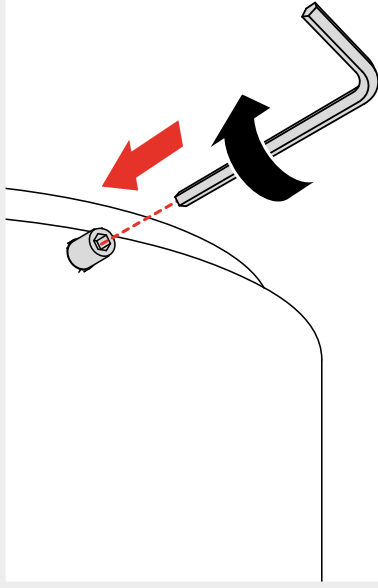

Artemide®



Artemide

via Bergamo, 18
20006 Pregnana M.se (MI)
ITALIA

tel. +39 02 935 181
fax +39 02 935 90 254
fax +39 02 935 90 496

www.artemide.com

VAT IT00846890150

cod. Y513001946