

## Luminaire

Code 0761030A+0780030A  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA DIFF.PERG.420

## Measurement

Code FTS1601745  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA DIFF.PERG.420

Luminaire Flux	2016 lm	Luminaire Power	31.0 W	Efficacy	65.048 lm/W	Efficiency	100.00%
Source Flux	2016 lm	Maximum value	438.62 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	420 mm	Height	290 mm		
Round Luminous Area		Diam.	420 mm	Height	290 mm		
Horizontal Luminous Area		0.138544 m <sup>2</sup>		Emitting area on Plane 180°		0.121800 m <sup>2</sup>	
Emitting area on Plane 0°		0.121800 m <sup>2</sup>		Emitting area on Plane 270°		0.121800 m <sup>2</sup>	
Emitting area on Plane 90°		0.121800 m <sup>2</sup>		Glare area at 76°		0.151699 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-09-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2016 lm	

LED Flux=2914lm LED Power=25,6W Eff=69,2% EfcLed=114lm/W EfcLum=65lm/W Ra=92 SDCM=2 L70(6K)=50000h

C.I.E. 69 85 94 81 100  
 F UTE 0.81 C + 0.19 T

D DIN 5040  
 B NBN

B51  
 BZ 2 / 0.8 / BZ 3 / 4 / BZ 4

Diam=420mm




Semipiani C

180.0 ——— 0.0

ULOR 18.57 %

DLOR 81.43 %

RN 18.57 %

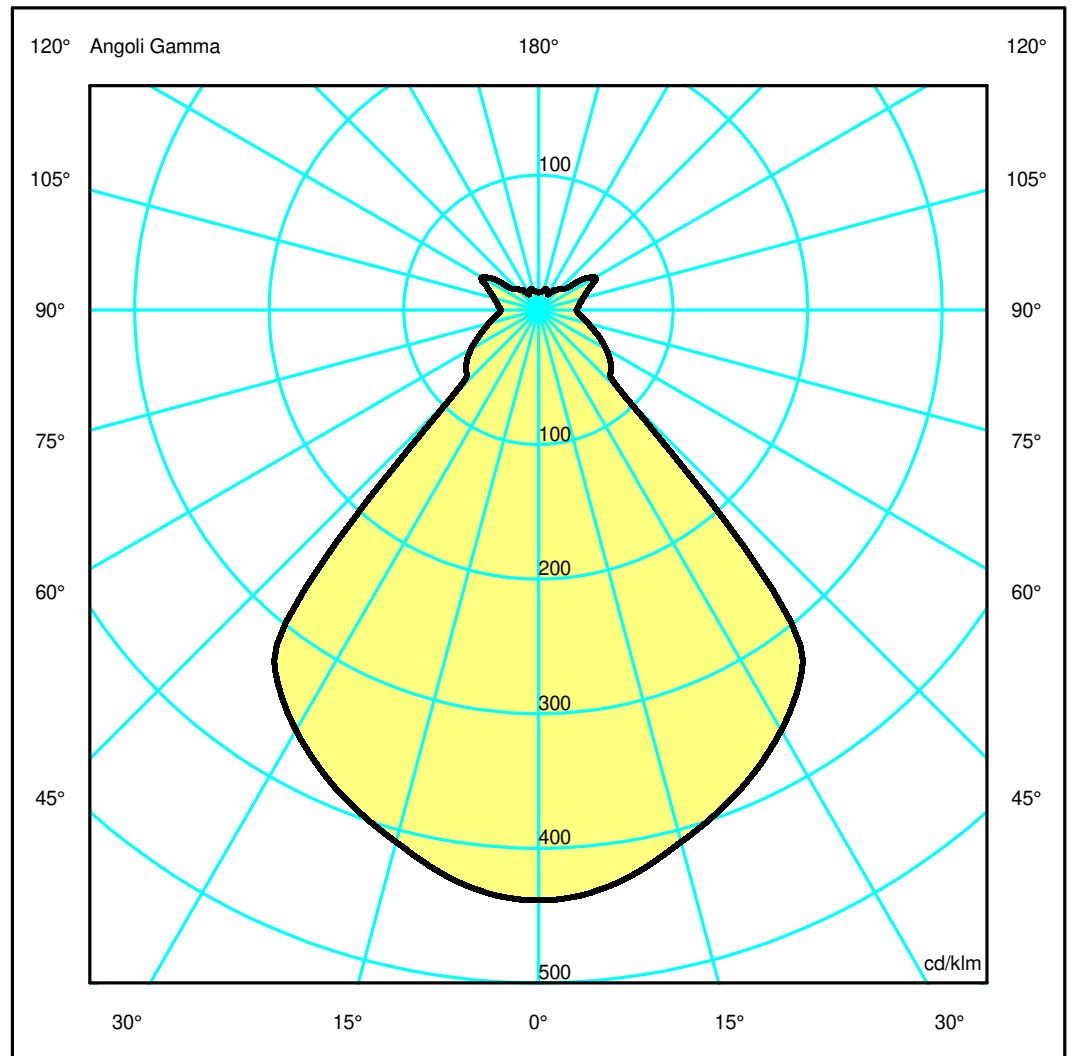

## Luminaire

Code 0761030A+0780030A  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA DIFF.PERG.420

## Measurerm.

Code FTS1601745  
 Name TOLOMEO MEGA LED BODY BLACK/DIMM + TOLOMEO MEGA DIFF.PERG.420

Luminaire Flux	2016 lm	Luminaire Power	31.0 W	Efficacy	65.048 lm/W	Efficiency	100.00%
Source Flux	2016 lm	Maximum value	438.62 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	420 mm	Height	290 mm		
Round Luminous Area		Diam.	420 mm	Height	290 mm		
Horizontal Luminous Area		0.138544 m2		Emitting area on Plane 180°		0.121800 m2	
Emitting area on Plane 0°		0.121800 m2		Emitting area on Plane 270°		0.121800 m2	
Emitting area on Plane 90°		0.121800 m2		Glare area at 76°		0.151699 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-09-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2016 lm	


LED Flux=2914lm LED Power=25,6W Eff=69,2% EfcLed=114lm/W EfcLum=65lm/W Ra=92 SDCM=2 L70(6K)=50000h

C.I.E.	69 85 94 81 100	D DIN 5040	B51
F UTE	0.81 C + 0.19 T	B NBN	BZ 2 / 0.8 / BZ 3 / 4 / BZ 4

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.88	1.76	2.63	3.51	4.39	OC	0.88	1.76	2.63	3.51	4.39
OB	0.88	1.76	2.63	3.51	4.39	OD	0.88	1.76	2.63	3.51	4.39

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	884.48	876.90	825.15	764.67	681.71	183.04	130.92	101.90	76.61	60.63
OB	884.48	876.90	825.15	764.67	681.71	183.04	130.92	101.90	76.61	60.63
OC	884.48	876.90	825.15	764.67	681.71	183.04	130.92	101.90	76.61	60.63
OD	884.48	876.90	825.15	764.67	681.71	183.04	130.92	101.90	76.61	60.63

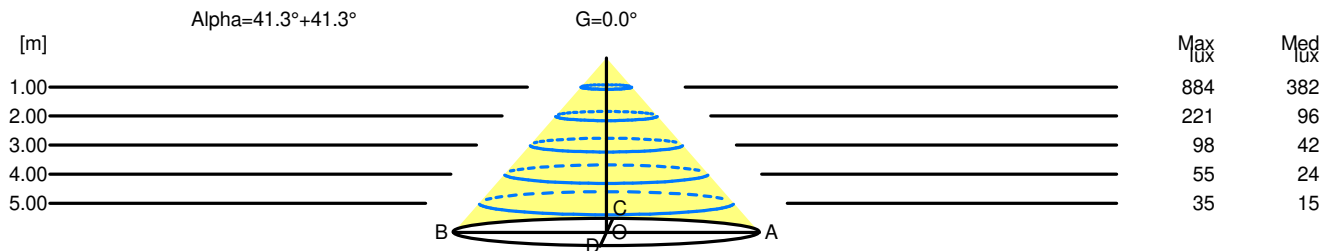

H[m]	D[m]	Max lux	Med lux	Alpha=41.3°+41.3°	G=0.0
1.00	1.76	884	382		
2.00	3.51	221	96		
3.00	5.27	98	42		
4.00	7.02	55	24		
5.00	8.78	35	15		