

## Luminaire

Code 0762030A+0781020A  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360

## Measurem.

Code FTS1601753  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360

Luminaire Flux	1912 lm	Luminaire Power	31.0 W	Efficacy	61.664 lm/W	Efficiency	100.00%
Source Flux	1912 lm	Maximum value	483.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	360 mm	Height	250 mm		
Round Luminous Area		Diam.	360 mm	Height	250 mm		
Horizontal Luminous Area		0.101788 m <sup>2</sup>		Emitting area on Plane 180°		0.090000 m <sup>2</sup>	
Emitting area on Plane 0°		0.090000 m <sup>2</sup>		Emitting area on Plane 270°		0.090000 m <sup>2</sup>	
Emitting area on Plane 90°		0.090000 m <sup>2</sup>		Glare area at 76°		0.111951 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-09-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1912 lm	

LED Flux=2914lm LED Power=25,6W Eff=65,6% EfcLed=114lm/W EfcLum=62lm/W Ra=92 SDCM=2 L70(6K)=50000h

C.I.E. 69 88 97 90 100  
 F UTE 0.90 C + 0.10 T

D DIN 5040  
 B NBN

B51  
 BZ 2 / 1.25 / BZ 3

Diam=360mm




Semipiani C

180.0 ——— 0.0

ULOR 10.35 %

DLOR 89.65 %

RN 10.35 %

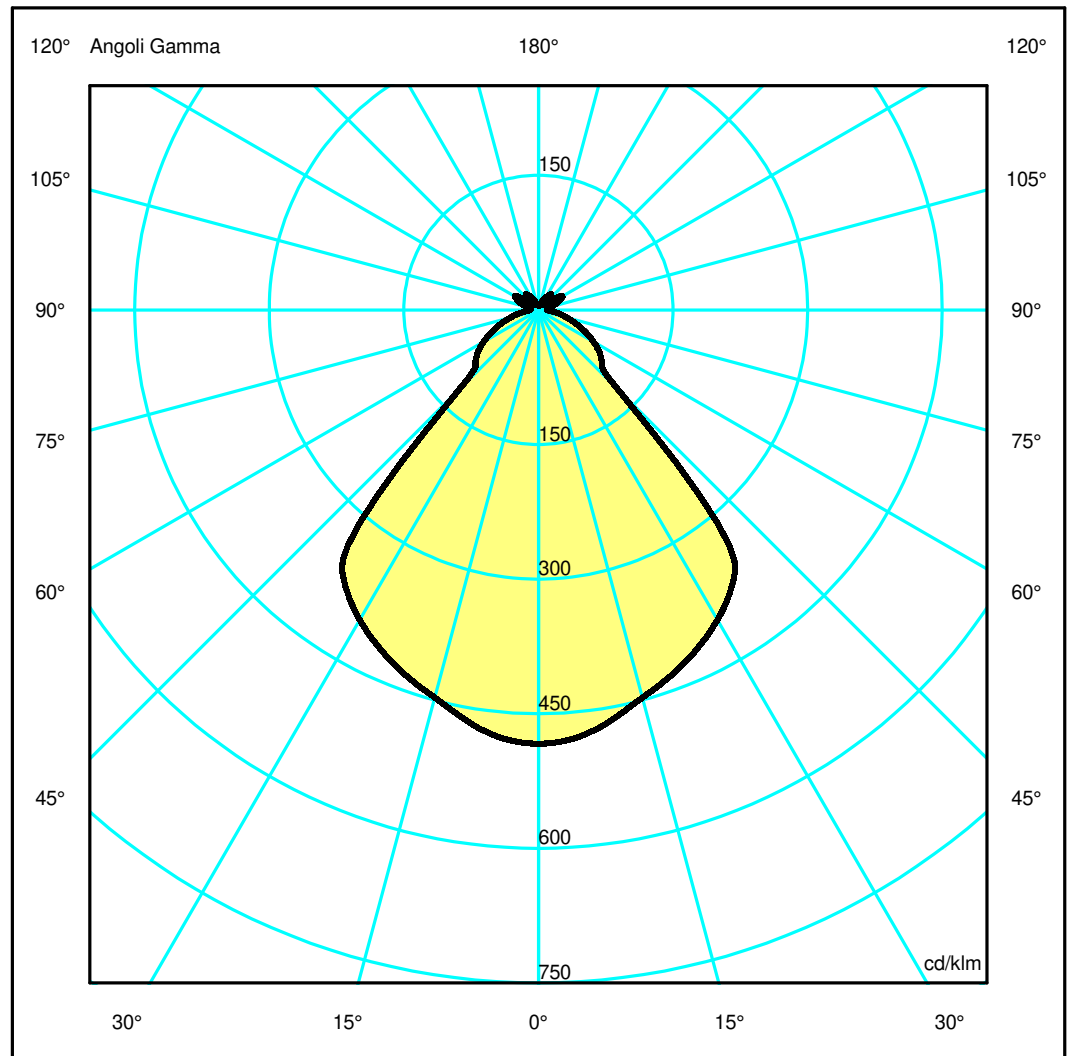

## Luminaire

Code 0762030A+0781020A  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360

## Measurem.

Code FTS1601753  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360

Luminaire Flux	1912 lm	Luminaire Power	31.0 W	Efficacy	61.664 lm/W	Efficiency	100.00%
Source Flux	1912 lm	Maximum value	483.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	360 mm	Height	250 mm		
Round Luminous Area		Diam.	360 mm	Height	250 mm		
Horizontal Luminous Area		0.101788 m2		Emitting area on Plane 180°		0.090000 m2	
Emitting area on Plane 0°		0.090000 m2		Emitting area on Plane 270°		0.090000 m2	
Emitting area on Plane 90°		0.090000 m2		Glare area at 76°		0.111951 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-09-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1912 lm	


LED Flux=2914lm LED Power=25,6W Eff=65,6% EfcLed=114lm/W EfcLum=62lm/W Ra=92 SDCM=2 L70(6K)=50000h

C.I.E.	69 88 97 90 100	D DIN 5040	B51
F UTE	0.90 C + 0.10 T	B NBN	BZ 2 / 1.25 / BZ 3

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.89	1.78	2.68	3.57	4.46	OC	0.89	1.78	2.68	3.57	4.46
OB	0.89	1.78	2.68	3.57	4.46	OD	0.89	1.78	2.68	3.57	4.46

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	923.95	914.84	854.82	797.63	717.71	238.89	158.55	109.69	62.71	28.20
OB	923.95	914.84	854.82	797.63	717.71	238.89	158.55	109.69	62.71	28.20
OC	923.95	914.84	854.82	797.63	717.71	238.89	158.55	109.69	62.71	28.20
OD	923.95	914.84	854.82	797.63	717.71	238.89	158.55	109.69	62.71	28.20

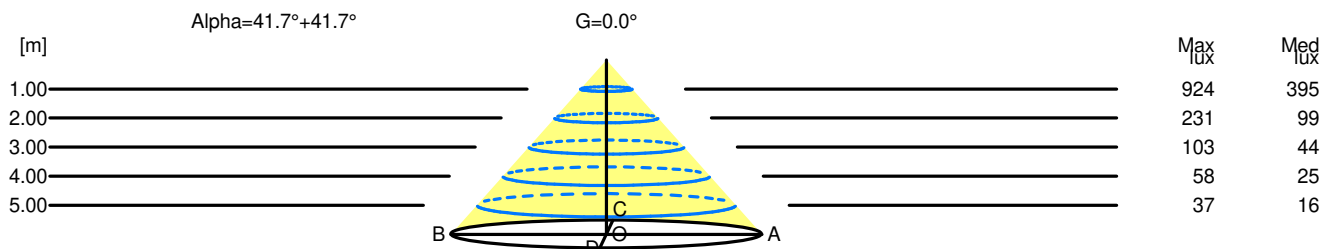

H[m]	D[m]	Max lux	Med lux	Alpha=41.7°+41.7°	G=0.0
1.00	1.78	924	395		
2.00	3.57	231	99		
3.00	5.35	103	44		
4.00	7.13	58	25		
5.00	8.92	37	16		