


Luminaire

Code AX05004
Name HELGOLAND 90 FIX 3000K WF NRO

Measurem.

Code FTS2400513
Name HELGOLAND 90 FIX 3000K WF NRO

Luminaire Flux	893 lm	Luminaire Power	6.0 W	Efficacy	148.833 lm/W	Efficiency	100.00%
Source Flux	893 lm	Maximum value	2351.60 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	12 mm		
Round Luminous Area		Diam.	64 mm	Height	0 mm		
Horizontal Luminous Area			0.003217 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000778 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		893 lm	
LED Flux=1081lm LED Power=6W Eff=83% EfcLed=180lm/W EfcLum=149lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

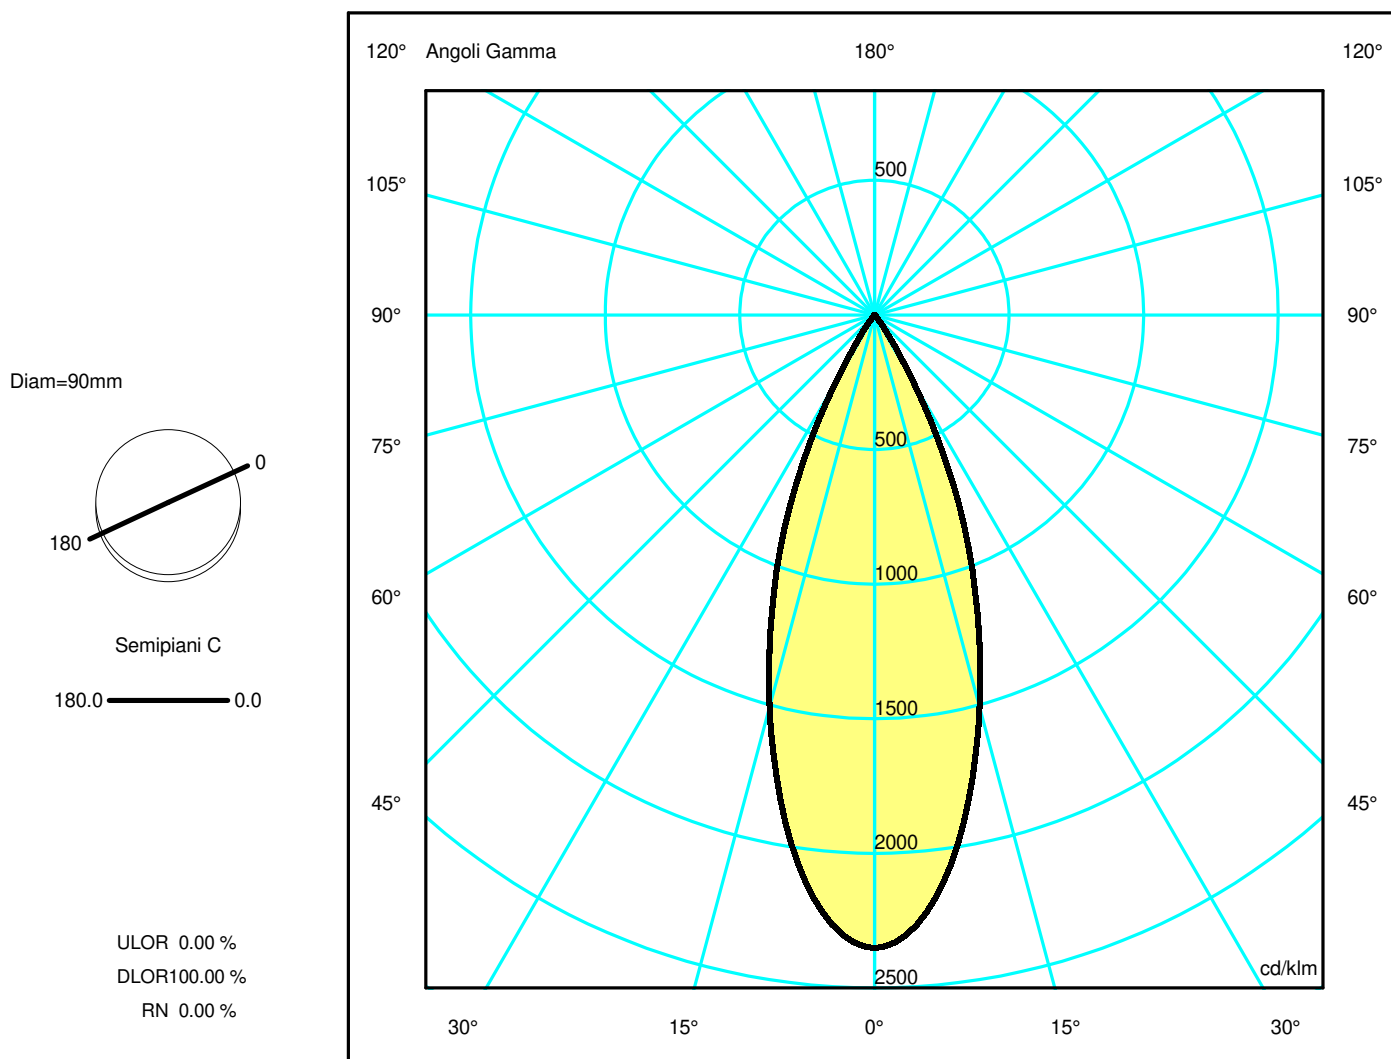

Luminaire

Code AX05004
Name HELGOLAND 90 FIX 3000K WF NRO

Measurum.


Code FTS2400513
Name HELGOLAND 90 FIX 3000K WF NRO

Luminaire Flux	893 lm	Luminaire Power	6.0 W	Efficacy	148.833 lm/W	Efficiency	100.00%
Source Flux	893 lm	Maximum value	2351.60 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	12 mm		
Round Luminous Area		Diam.	64 mm	Height	0 mm		
Horizontal Luminous Area		0.003217 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000778 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		893 lm	
LED Flux=1081lm LED Power=6W Eff=83% EfcLed=180lm/W EfcLum=149lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.34	0.69	1.03	1.38	1.72	OC	0.34	0.69	1.03	1.38	1.72
OB	0.34	0.69	1.03	1.38	1.72	OD	0.34	0.69	1.03	1.38	1.72

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2099.98	1988.17	1345.14	614.40	70.17	7.43	3.63	1.92	0.75	0.24
OB	2099.98	1988.17	1345.14	614.40	70.17	7.43	3.63	1.92	0.75	0.24
OC	2099.98	1988.17	1345.14	614.40	70.17	7.43	3.63	1.92	0.75	0.24
OD	2099.98	1988.17	1345.14	614.40	70.17	7.43	3.63	1.92	0.75	0.24

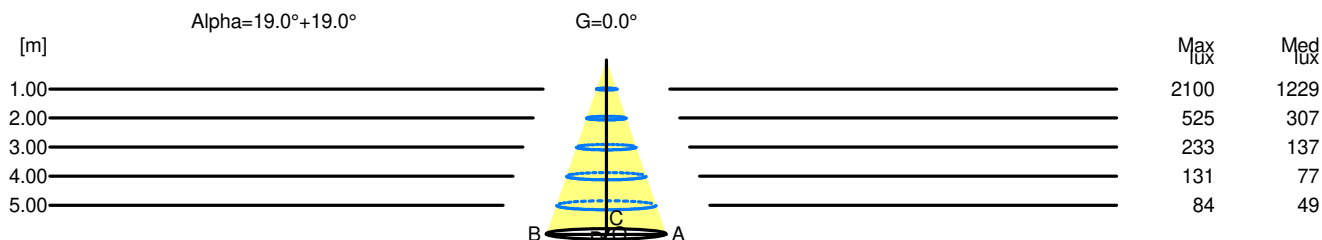

H[m]	D[m]	Max lux	Med lux	Alpha=19.0°+19.0°	G=0.0
1.00	0.69	2100	1229		
2.00	1.38	525	307		
3.00	2.06	233	137		
4.00	2.75	131	77		
5.00	3.44	84	49		