

## Luminaire


Code M0366N21  
Name CHOCOLATE FLOOR ECO COMFORT 4000K DIM WHITE

## Measurement

Code FTS1603020-B  
Name CHOCOLATE FLOOR ECO COMFORT 4000K DIM WHITE

Luminaire Flux	8275 lm	Luminaire Power	77.0 W	Efficacy	107.468 lm/W	Efficiency	100.00%
Source Flux	8275 lm	Maximum value	189.75 cd/klm	Position	C=5.00 G=167.00	CG	Double Symmetrical
Rectangular Luminaire		Length	585 mm	Width	255 mm	Height	50 mm
Rectangular Luminous Area		Length	585 mm	Width	198 mm	Height	10 mm
Horizontal Luminous Area		0.115830 m <sup>2</sup>		Emitting area on Plane 180°		0.005850 m <sup>2</sup>	
Emitting area on Plane 0°		0.005850 m <sup>2</sup>		Emitting area on Plane 270°		0.001980 m <sup>2</sup>	
Emitting area on Plane 90°		0.001980 m <sup>2</sup>		Glare area at 76°		0.033698 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		31-10-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		8275 lm	
LED Flux=12169lm LED Power=66W Eff=68% EfcLed=183lm/W EfcLum=107lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(12k)=69000h							
C.I.E.	52 85 96 45 100			D DIN 5040		C42	
F UTE	0.45 D + 0.55 T			B NBN		BZ 4	

585mm x 255mm




Semipiani C

180.0 ——— 0.0  
270.0 ——— 90.0

ULOR 54.73 %

DLOR 45.27 %

RN 54.73 %

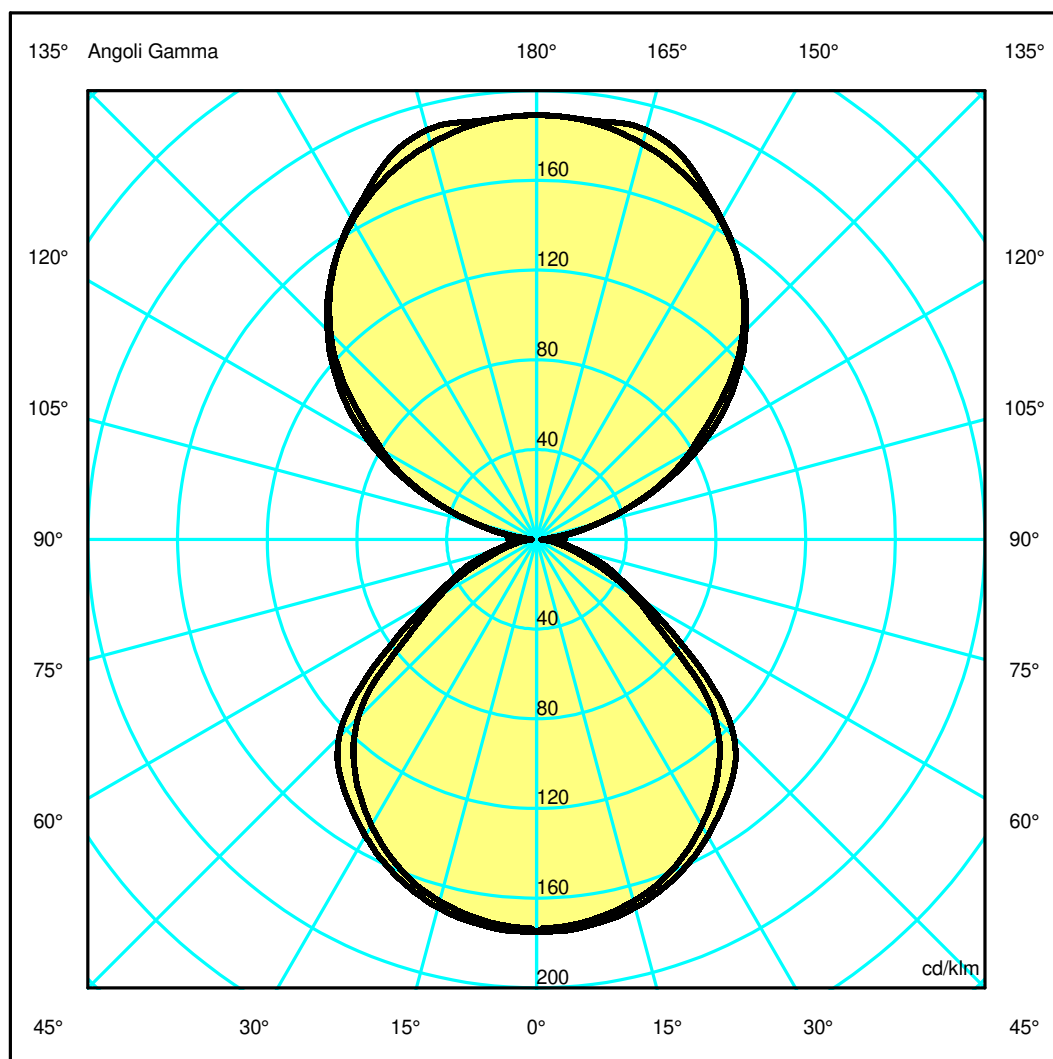

## Luminaire

Code M0366N21  
Name CHOCOLATE FLOOR ECO COMFORT 4000K DIM WHITE

## Measurerm.


Code FTS1603020-B  
Name CHOCOLATE FLOOR ECO COMFORT 4000K DIM WHITE

Luminaire Flux	8275 lm	Luminaire Power	77.0 W	Efficacy	107.468 lm/W	Efficiency	100.00%
Source Flux	8275 lm	Maximum value	189.75 cd/klm	Position	C=5.00 G=167.00	CG	Double Symmetrical
Rectangular Luminaire		Length	585 mm	Width	255 mm	Height	50 mm
Rectangular Luminous Area		Length	585 mm	Width	198 mm	Height	10 mm
Horizontal Luminous Area		0.115830 m2		Emitting area on Plane 180°		0.005850 m2	
Emitting area on Plane 0°		0.005850 m2		Emitting area on Plane 270°		0.001980 m2	
Emitting area on Plane 90°		0.001980 m2		Glare area at 76°		0.033698 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		31-10-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		8275 lm	
LED Flux=12169lm LED Power=66W Eff=68% EfcLed=183lm/W EfcLum=107lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(12k)=69000h							
C.I.E.	52 85 96 45 100			D DIN 5040	C42		
F UTE	0.45 D + 0.55 T			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.44	2.88	4.33	5.77	7.21	OC	1.56	3.12	4.68	6.24	7.80
OB	1.44	2.88	4.33	5.77	7.21	OD	1.56	3.12	4.68	6.24	7.80

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1564.89	1559.95	1563.17	1444.68	1283.67	1074.69	792.02	532.52	247.20	73.19
OB	1564.89	1559.95	1563.17	1444.68	1283.67	1074.69	792.02	532.52	247.20	73.19
OC	1564.89	1560.36	1510.99	1420.98	1283.94	1091.12	850.33	550.28	244.41	40.87
OD	1564.89	1560.36	1510.99	1420.98	1283.94	1091.12	850.33	550.28	244.41	40.87

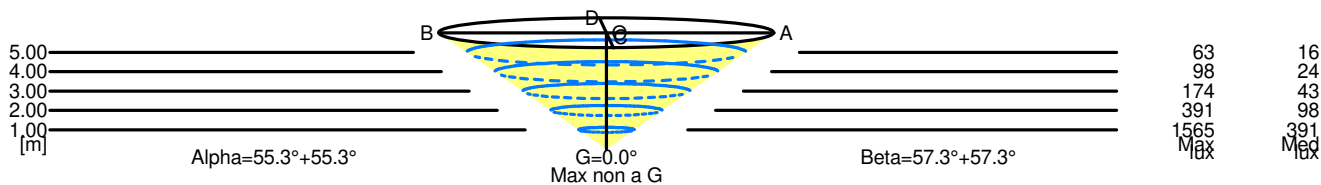

5.00	14.42	63	16		
4.00	11.54	98	24		
3.00	8.65	174	43		
2.00	5.77	391	98		
1.00	2.88	1565	391		
H[m]	D[m]	Max lux	Med lux	Alpha=55.3°+55.3°	Max non a G G=0.0°

5.00	15.60	63	16		
4.00	12.48	98	24		
3.00	9.36	174	43		
2.00	6.24	391	98		
1.00	3.12	1565	391		
H[m]	D[m]	Max lux	Med lux	Beta=57.3°+57.3°	Max non a G G=0.0°