

Luminaire


Code M112710
 Name CHOCOLATE PARETE LED 4000K NON DIMMERABILE moka

Measurement

Code FTS1400868-C
 Name CHOCOLATE PARETE LED 4000K NON DIMMERABILE moka

Luminaire Flux	2315 lm	Luminaire Power	32.0 W	Efficacy	72.344 lm/W	Efficiency	100.00%
Source Flux	2315 lm	Maximum value	281.54 cd/klm	Position	C=10.00 G=2.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1145 mm	Width	135 mm	Height	40 mm
Rectangular Luminous Area		Length	1145 mm	Width	60 mm	Height	9 mm
Horizontal Luminous Area		0.068700 m ²		Emitting area on Plane 180°	0.011450 m ²		
Emitting area on Plane 0°		0.011450 m ²		Emitting area on Plane 270°	0.000600 m ²		
Emitting area on Plane 90°		0.000600 m ²		Glare area at 76°	0.027730 m ²		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		31-10-2024		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	2315 lm		
LED Flux=4209lm LED Power=24W Eff=55% EfcLed=172lm/W EfcLum=72lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(12k)=69000h							
C.I.E.	52 83 96 66 100			D DIN 5040	B41		
F UTE	0.66 D + 0.34 T			B NBN	BZ 4		


1145mm x 135mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 33.56 %
 DLOR 66.44 %
 RN 33.56 %

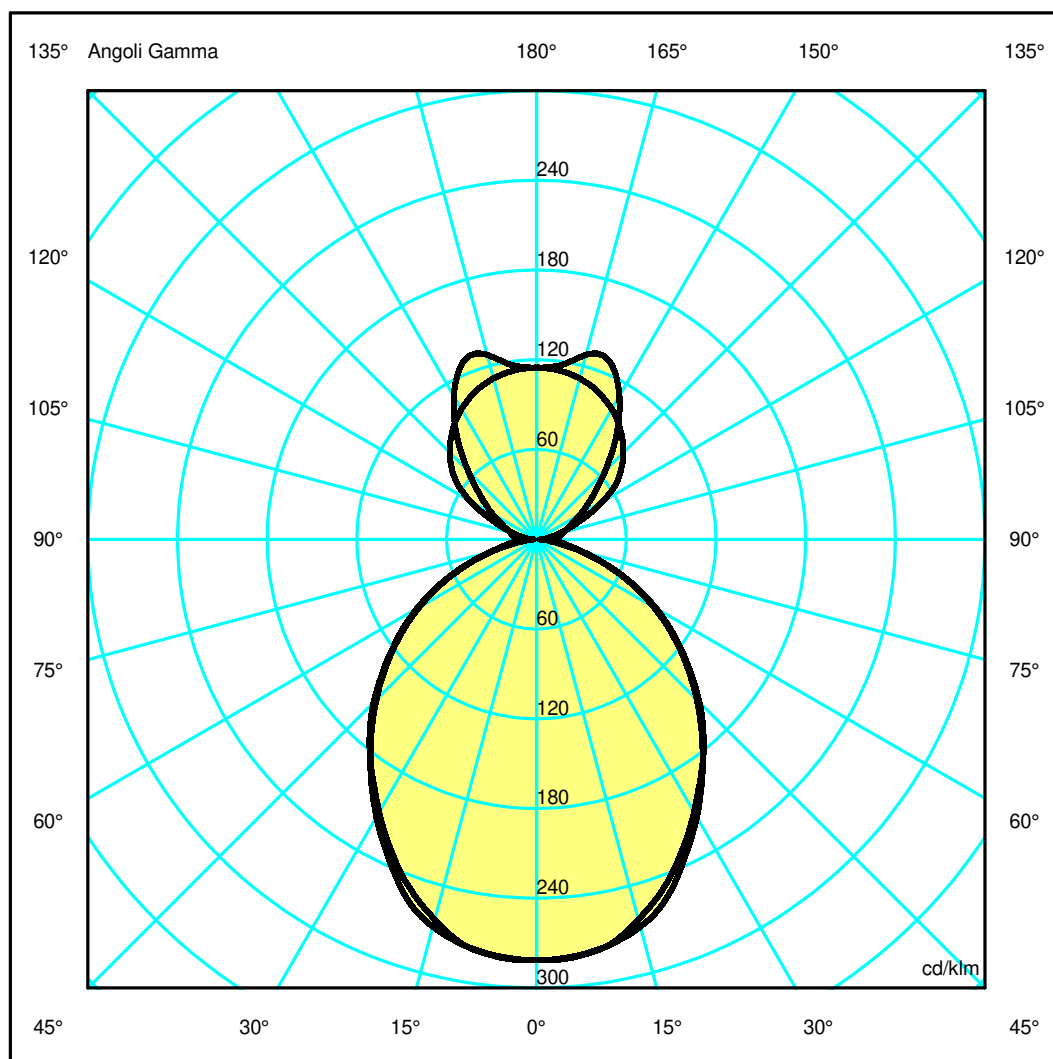

Luminaire

Code M112710
Name CHOCOLATE PARETE LED 4000K NON DIMMERABILE moka

Measurerm.


Code FTS1400868-C
Name CHOCOLATE PARETE LED 4000K NON DIMMERABILE moka

Luminaire Flux	2315 lm	Luminaire Power	32.0 W	Efficacy	72.344 lm/W	Efficiency	100.00%
Source Flux	2315 lm	Maximum value	281.54 cd/klm	Position	C=10.00 G=2.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1145 mm	Width	135 mm	Height	40 mm
Rectangular Luminous Area		Length	1145 mm	Width	60 mm	Height	9 mm
Horizontal Luminous Area		0.068700 m2		Emitting area on Plane 180°		0.011450 m2	
Emitting area on Plane 0°		0.011450 m2		Emitting area on Plane 270°		0.000600 m2	
Emitting area on Plane 90°		0.000600 m2		Glare area at 76°		0.027730 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		31-10-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2315 lm	
LED Flux=4209lm LED Power=24W Eff=55% EfcLed=172lm/W EfcLum=72lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(12k)=69000h							
C.I.E.	52 83 96 66 100			D DIN 5040	B41		
F UTE	0.66 D + 0.34 T			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.11	2.23	3.34	4.45	5.57	OC	1.10	2.19	3.29	4.38	5.48
OB	1.11	2.23	3.34	4.45	5.57	OD	1.10	2.19	3.29	4.38	5.48

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	651.35	649.44	609.26	532.11	444.15	356.62	260.60	165.54	74.19	33.06
OB	651.35	649.44	609.26	532.11	444.15	356.62	260.60	165.54	74.19	33.06
OC	651.35	648.05	620.82	543.24	447.23	350.68	256.68	161.83	70.26	13.04
OD	651.35	648.05	620.82	543.24	447.23	350.68	256.68	161.83	70.26	13.04

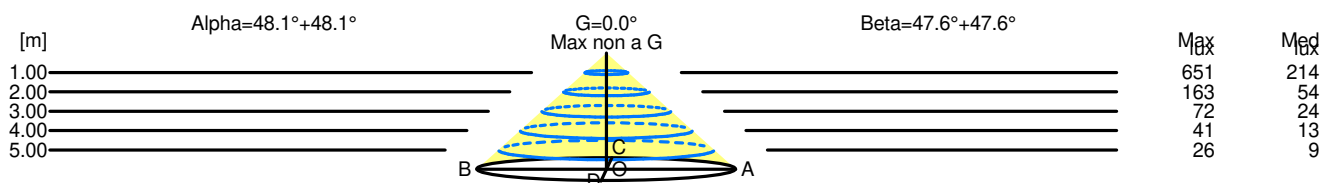

H[m]	D[m]	Max lux	Med lux	Alpha=48.1°+48.1°	G=0.0 Max non a G
1.00	2.23	651	214		
2.00	4.45	163	54		
3.00	6.68	72	24		
4.00	8.91	41	13		
5.00	11.13	26	9		

H[m]	D[m]	Max lux	Med lux	Beta=47.6°+47.6°	G=0.0 Max non a G
1.00	2.19	651	214		
2.00	4.38	163	54		
3.00	6.57	72	24		
4.00	8.77	41	13		
5.00	10.96	26	9		