


Luminaire

Code 0510010A
Name TOLOMEO MAXI

Measurem.

Code FTS1702508
Name TOLOMEO MAXI

Luminaire Flux	2076.97 lm	Luminaire Power	21.00 W	Efficacy	98.90 lm/W	Efficiency	84.71%
Lamps Flux	2452.00 lm	Maximum value	185.14 cd/klm	Position	C=0.00 G=1.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	520 mm 520 mm	Height Height	367 mm 367 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.212372 m2 0.190840 m2 0.190840 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.190840 m2 0.190840 m2 0.236549 m2	
Coordinate system Date Measurement Distance		CG 18-12-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Asymmetrical 180 2452.00 lm	
LAMP LED 21W E27 220/240V 3000K A67 DIMM							
C.I.E. F UTE	49 77 90 64 85 0.54 E + 0.30 T			D DIN 5040 B NBN		B31 BZ 4 / 1 / BZ 5	

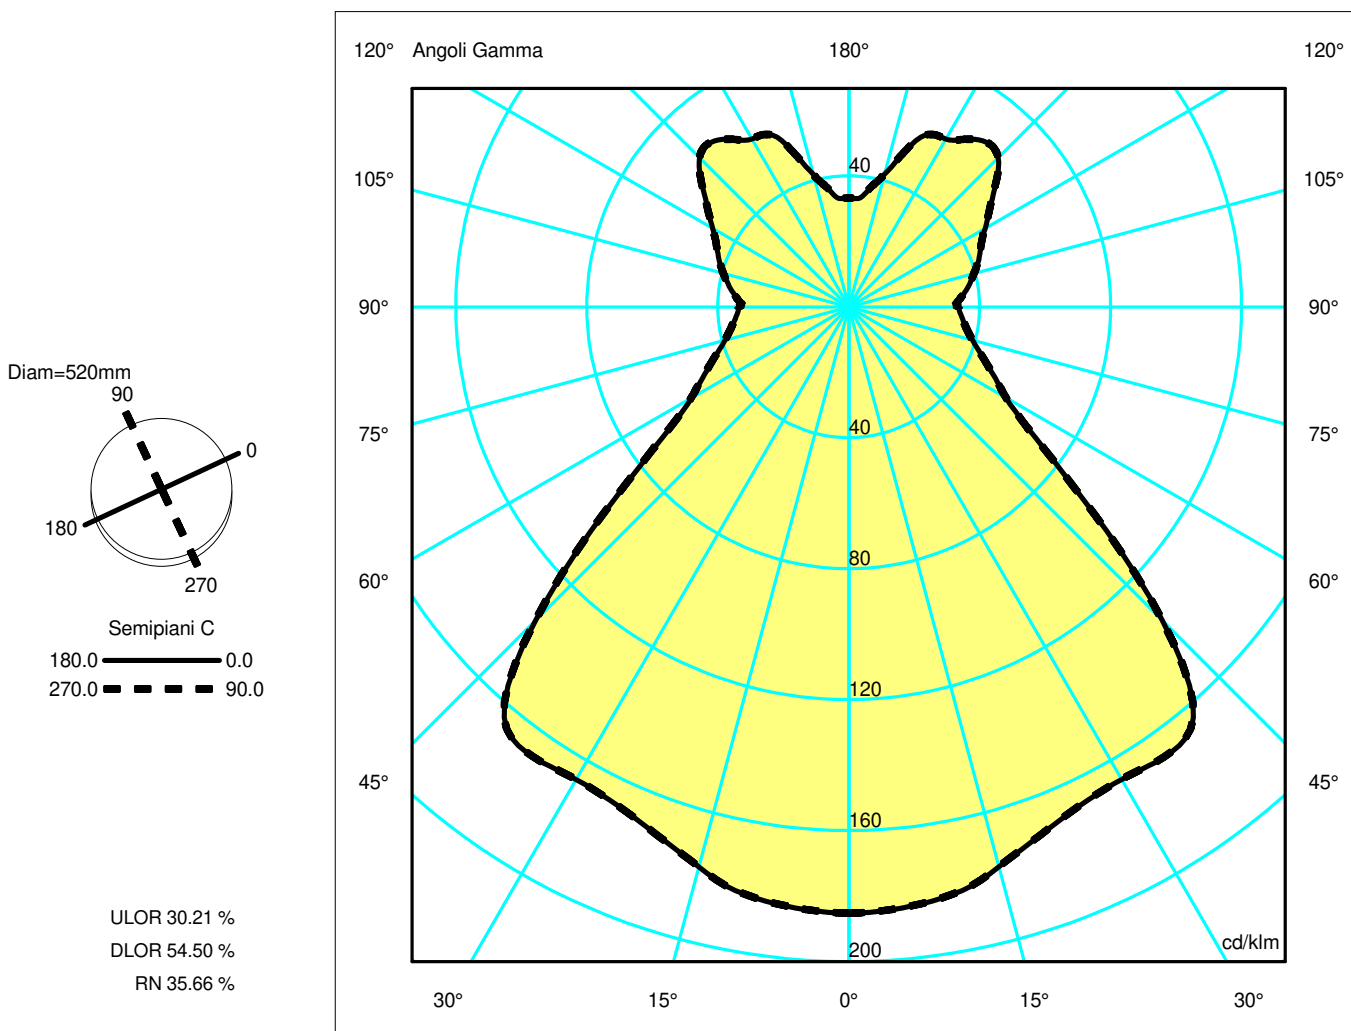

Luminaire

Code 0510010A
Name TOLOMEO MAXI

Measurerm.


Code FTS1702508
Name TOLOMEO MAXI

Luminaire Flux	2076.97 lm	Luminaire Power	21.00 W	Efficacy	98.90 lm/W	Efficiency	84.71%
Lamps Flux	2452.00 lm	Maximum value	185.14 cd/klm	Position	C=0.00 G=1.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	520 mm 520 mm	Height Height	367 mm 367 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.212372 m2 0.190840 m2 0.190840 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.190840 m2 0.190840 m2 0.236549 m2	
Coordinate system Date Measurement Distance		CG 18-12-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Asymmetrical 180 2452.00 lm	
LAMP LED 21W E27 220/240V 3000K A67 DIMM							
C.I.E. F UTE	49 77 90 64 85 0.54 E + 0.30 T			D DIN 5040 B NBN		B31 BZ 4 / 1 / BZ 5	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.22	2.44	3.66	4.88	6.10	OC	1.22	2.44	3.66	4.88	6.10
OB	1.22	2.44	3.66	4.88	6.10	OD	1.22	2.44	3.66	4.88	6.10

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	453.92	451.94	434.16	411.55	411.69	331.92	170.36	119.18	95.90	84.79
OB	453.92	451.94	434.16	411.55	411.69	331.92	170.36	119.18	95.90	84.79
OC	453.92	451.94	434.16	411.55	411.69	331.92	170.36	119.18	95.90	84.79
OD	453.92	451.94	434.16	411.55	411.69	331.92	170.36	119.18	95.90	84.79

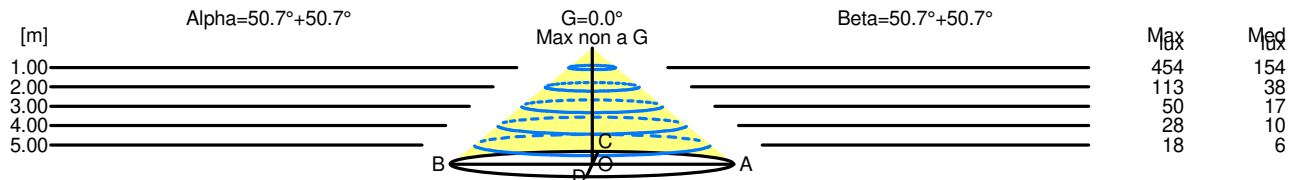

H[m]	D[m]	Max lux	Med lux	Alpha=50.7°+50.7°	G=0.0 Max non a G
1.00	2.44	454	154		
2.00	4.88	113	38		
3.00	7.32	50	17		
4.00	9.76	28	10		
5.00	12.20	18	6		

H[m]	D[m]	Max lux	Med lux	Beta=50.7°+50.7°	G=0.0 Max non a G
1.00	2.44	454	154		
2.00	4.88	113	38		
3.00	7.32	50	17		
4.00	9.76	28	10		
5.00	12.20	18	6		