

Luminaire

Code 0644020A
Name LOGICO MICRO PLAFONE

Measurum.

Code FTS161218-A
Name LOGICO MICRO PLAFONE


| | | | | | | | |
|----------------------------|--------|-----------------|-------------------------|-----------------------------|-----------------|--------------|-------------------------|
| Luminaire Flux | 421 lm | Luminaire Power | 5.0 W | Efficacy | 84.133 lm/W | Efficiency | 89.50% |
| Source Flux | 470 lm | Maximum value | 136.62 cd/klm | Position | C=30.00 G=30.00 | CG | Asymmetrical |
| Round Luminaire | | Diam. | 180 mm | Height | 170 mm | | |
| Round Luminous Area | | Diam. | 180 mm | Height | 170 mm | | |
| Horizontal Luminous Area | | | 0.025447 m ² | Emitting area on Plane 180° | | | 0.030600 m ² |
| Emitting area on Plane 0° | | | 0.030600 m ² | Emitting area on Plane 270° | | | 0.030600 m ² |
| Emitting area on Plane 90° | | | 0.030600 m ² | Glare area at 76° | | | 0.035847 m ² |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 20-01-2022 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 470 lm | |

Lamping=LED DIM 1x5W (E14) CCT=2700K CRI=80

C.I.E. 34 56 77 55 90
F UTE 0.49 H + 0.40 T

D DIN 5040
B NBN

C21
BZ 6 / 1.25 / BZ 7

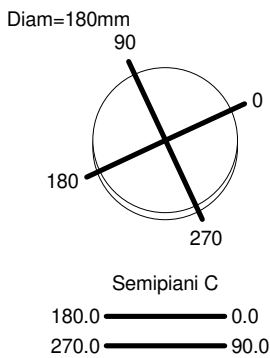

ULOR 40.03 %
DLOR 49.48 %
RN 44.72 %

