

## Luminaire

Code 1201£00A  
Name Alphabet of light - Å

## Measurerm.

Code FTS1700229  
Name Alphabet of light - Å

Luminaire Flux	2372.00 lm	Luminaire Power	35.00 W	Efficacy	67.77 lm/W	Efficiency	100.00%
Sources Flux	2372.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	959 mm
Horizontal Luminous Area	0.033000 m2			Emitting area on Plane 180°	0.633600 m2		
Emitting area on Plane 0°	0.633600 m2			Emitting area on Plane 270°	0.048000 m2		
Emitting area on Plane 90°	0.048000 m2			Glare area at 76°	0.622763 m2		
Coordinate system	CG			Symmetry Type	Sym. on planes 0-180		
Date	05-04-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2372.00 lm		


LED Flux=3432,72lm LED Power=35W Eff=69% EfcLed=98lm/W EfcLum=68lm/W Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 21 46 73 50 100  
F UTE 0.50 J + 0.50 T

D DIN 5040  
B NBN

C11  
BZ 9

660mm x 50mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 50.00 %

DLOR 50.00 %

RN 50.00 %

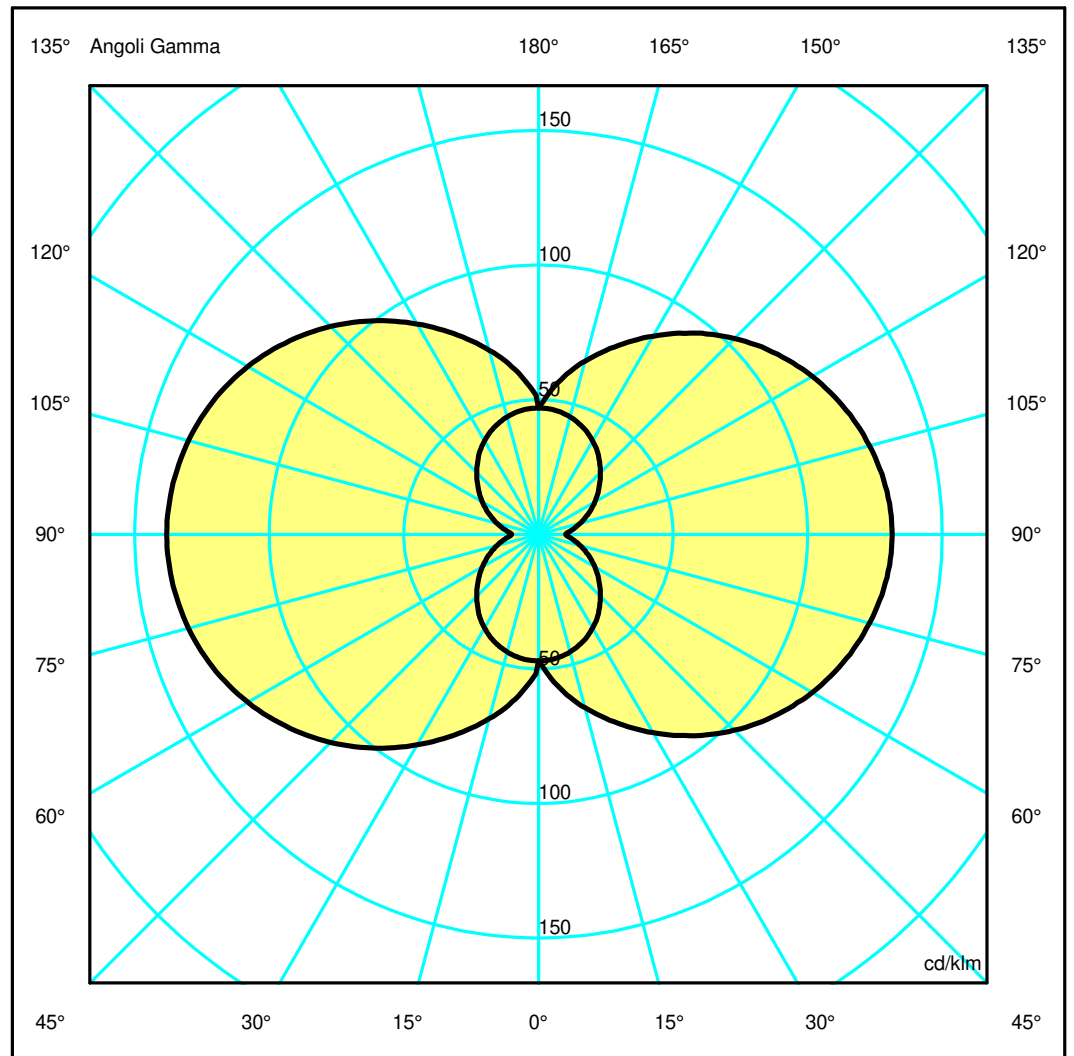

**Luminaire**

Code 1201£00A  
Name Alphabet of light - Å

**Measurem.**

Code FTS1700229  
Name Alphabet of light - Å

Luminaire Flux	2372.00 lm	Luminaire Power	35.00 W	Efficacy	67.77 lm/W	Efficiency	100.00%
Sources Flux	2372.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	960 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	959 mm
Horizontal Luminous Area		0.033000 m2		Emitting area on Plane 180°		0.633600 m2	
Emitting area on Plane 0°		0.633600 m2		Emitting area on Plane 270°		0.048000 m2	
Emitting area on Plane 90°		0.048000 m2		Glare area at 76°		0.622763 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2372.00 lm	
LED Flux=3432,72lm LED Power=35W Eff=69% EfcLed=98lm/W EfcLum=68lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040	C11		
F UTE	0.50 J + 0.50 T			B NBN	BZ 9		

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90