

## Luminaire

Code 1201100A  
Name Alphabet of light - I

## Measurment

Code FTS1700196-A  
Name Alphabet of light - I


Luminaire Flux	1008 lm	Luminaire Power	12.0 W	Efficacy	84.002 lm/W	Efficiency	100.00%
Source Flux	1008 lm	Maximum value	114.34 cd/klm	Position	C=90.00 G=89.00	CG	Double Symmetrical
Rectangular Luminaire		Length	50 mm	Width	50 mm	Height	950 mm
Rectangular Luminous Area		Length	50 mm	Width	50 mm	Height	950 mm
Horizontal Luminous Area		0.002500 m <sup>2</sup>		Emitting area on Plane 180°		0.047500 m <sup>2</sup>	
Emitting area on Plane 0°		0.047500 m <sup>2</sup>		Emitting area on Plane 270°		0.047500 m <sup>2</sup>	
Emitting area on Plane 90°		0.047500 m <sup>2</sup>		Glare area at 76°		0.046694 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		10-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1008 lm	

LED Flux=1149lm LED Power=12W Eff=88% EfcLed=96lm/W EfcLum=84lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=36000h

C.I.E. 14 38 68 50 100  
F UTE --

D DIN 5040  
B NBN

C11  
BZ 10

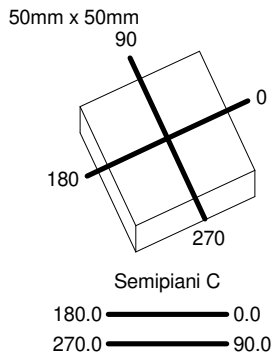

ULOR 50.00 %  
DLOR 50.00 %  
RN 50.00 %

