

## Luminaire

Code 1215£00A  
Name AOL MINI W Â UPPERCASE

## Measurement

Code FTS2400004  
Name AOL MINI W Â UPPERCASE

Luminaire Flux	1357 lm	Luminaire Power	13.0 W	Efficacy	104.385 lm/W	Efficiency	100.00%
Source Flux	1357 lm	Maximum value	186.83 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	433 mm	Width	245 mm	Height	42 mm
Rectangular Luminous Area		Length	433 mm	Width	67 mm	Height	25 mm
Horizontal Luminous Area		0.029011 m2		Emitting area on Plane 180°		0.010825 m2	
Emitting area on Plane 0°		0.010825 m2		Emitting area on Plane 270°		0.001675 m2	
Emitting area on Plane 90°		0.001675 m2		Glare area at 76°		0.017522 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		19-12-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1357 lm	


LED Flux=1713lm LED Power=13W Eff=79% EfcLed=132lm/W EfcLum=104lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 36 65 86 72 100  
F UTE 0.72 H + 0.28 T

D DIN 5040  
B NBN

B21  
BZ 6

433mm x 245mm




Sempiani C

180.0 ——— 0.0

ULOR 27.80 %

DLOR 72.20 %

RN 27.80 %

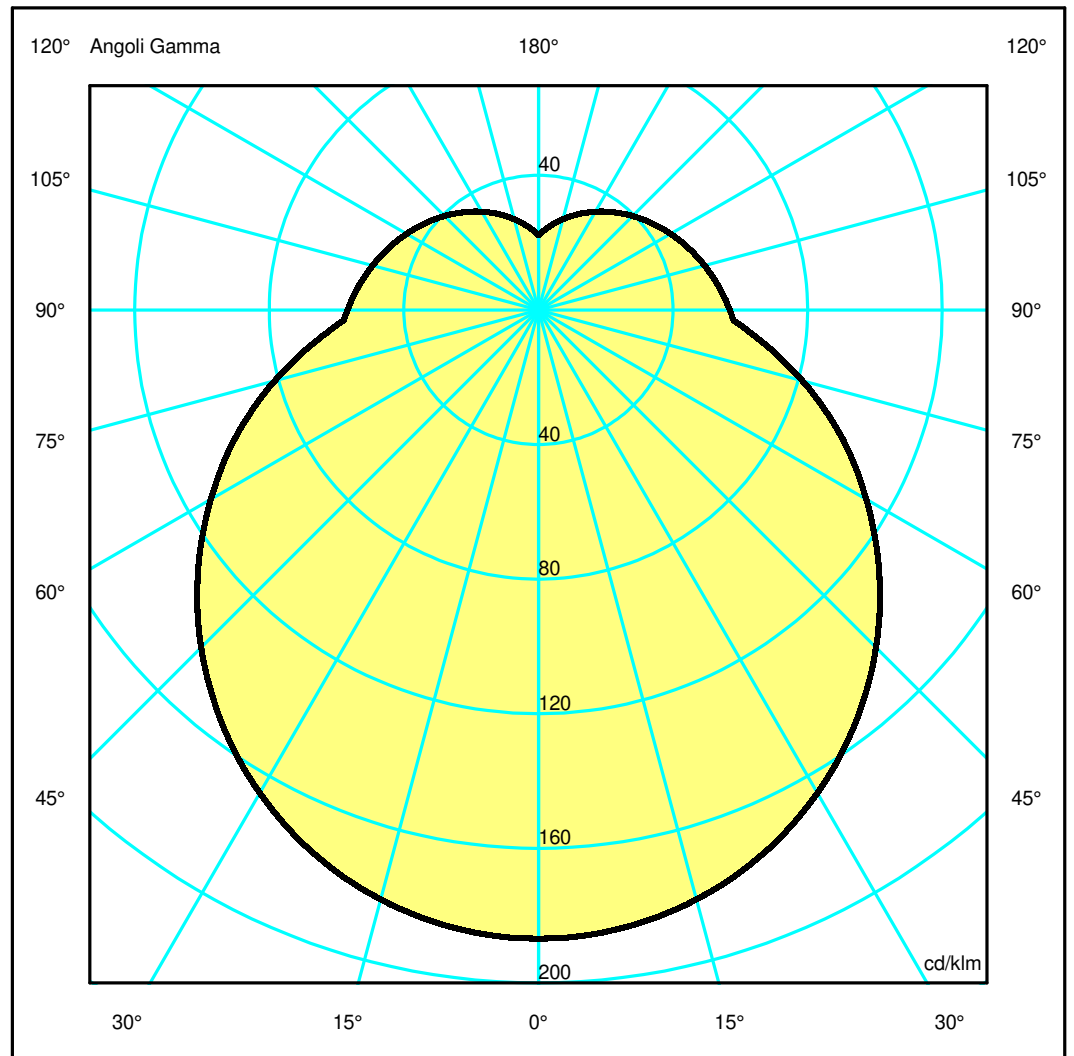

## Luminaire

Code 1215£00A  
Name AOL MINI W Å UPPERCASE

## Measurerm.


Code FTS2400004  
Name AOL MINI W Å UPPERCASE

Luminaire Flux	1357 lm	Luminaire Power	13.0 W	Efficacy	104.385 lm/W	Efficiency	100.00%
Source Flux	1357 lm	Maximum value	186.83 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	433 mm 433 mm	Width Width	245 mm 67 mm	Height Height	42 mm 25 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.029011 m2 0.010825 m2 0.001675 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.010825 m2 0.001675 m2 0.017522 m2			
Coordinate system Date Measurement Distance	CG 19-12-2023 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1357 lm			
LED Flux=1713lm LED Power=13W Eff=79% EfcLed=132lm/W EfcLum=104lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E. F UTE	36 65 86 72 100 0.72 H + 0.28 T		D DIN 5040 B NBN	B21 BZ 6			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.64	5.28	7.91	10.55	13.19	OC	2.64	5.28	7.91	10.55	13.19
OB	2.64	5.28	7.91	10.55	13.19	OD	2.64	5.28	7.91	10.55	13.19

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	253.53	252.61	246.07	233.41	215.24	192.45	166.44	138.90	110.15	83.32
OB	253.53	252.61	246.07	233.41	215.24	192.45	166.44	138.90	110.15	83.32
OC	253.53	252.61	246.07	233.41	215.24	192.45	166.44	138.90	110.15	83.32
OD	253.53	252.61	246.07	233.41	215.24	192.45	166.44	138.90	110.15	83.32

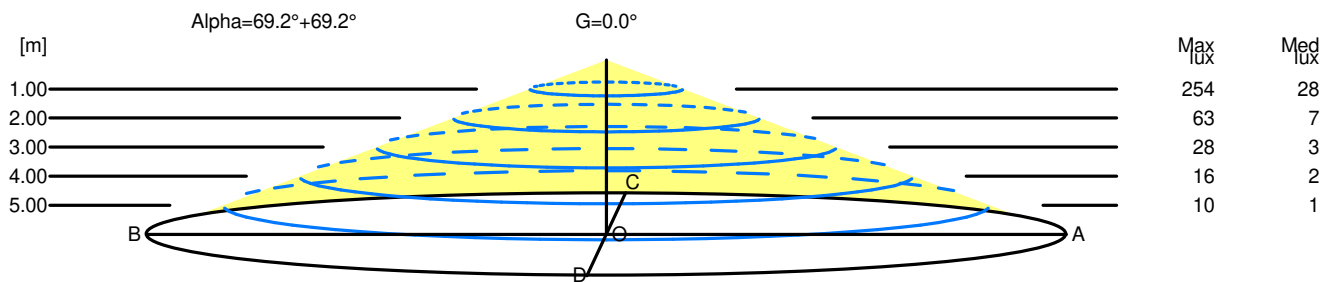

H[m]	D[m]	Max lux	Med lux	Alpha=69.2°+69.2°	G=0.0
1.00	5.28	254	28		
2.00	10.55	63	7		
3.00	15.83	28	3		
4.00	21.10	16	2		
5.00	26.38	10	1		