

Luminaire

Code 1215F00A
Name AOL MINI W F UPPERCASE

Measurerm.

Code FTS2400012
Name AOL MINI W F UPPERCASE

Luminaire Flux	699 lm	Luminaire Power	7.0 W	Efficacy	99.857 lm/W	Efficiency	100.00%
Source Flux	699 lm	Maximum value	186.85 cd/klm	Position	C=70.00 G=2.00	CG	Asymmetrical
Rectangular Luminaire		Length	355 mm	Width	245 mm	Height	42 mm
Rectangular Luminous Area		Length	355 mm	Width	41 mm	Height	25 mm
Horizontal Luminous Area		0.014555 m ²		Emitting area on Plane 180°		0.008875 m ²	
Emitting area on Plane 0°		0.008875 m ²		Emitting area on Plane 270°		0.001025 m ²	
Emitting area on Plane 90°		0.001025 m ²		Glare area at 76°		0.012133 m ²	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		19-12-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		699 lm	


LED Flux=882lm LED Power=7W Eff=79% EfcLed=126lm/W EfcLum=100lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 36 65 86 72 100
F UTE 0.72 H + 0.28 T

D DIN 5040
B NBN

B21
BZ 6


355mm x 245mm



Semipiani C

180.0 ——— 0.0
270.0 ——— 90.0

ULOR 27.80 %
DLOR 72.20 %
RN 27.80 %

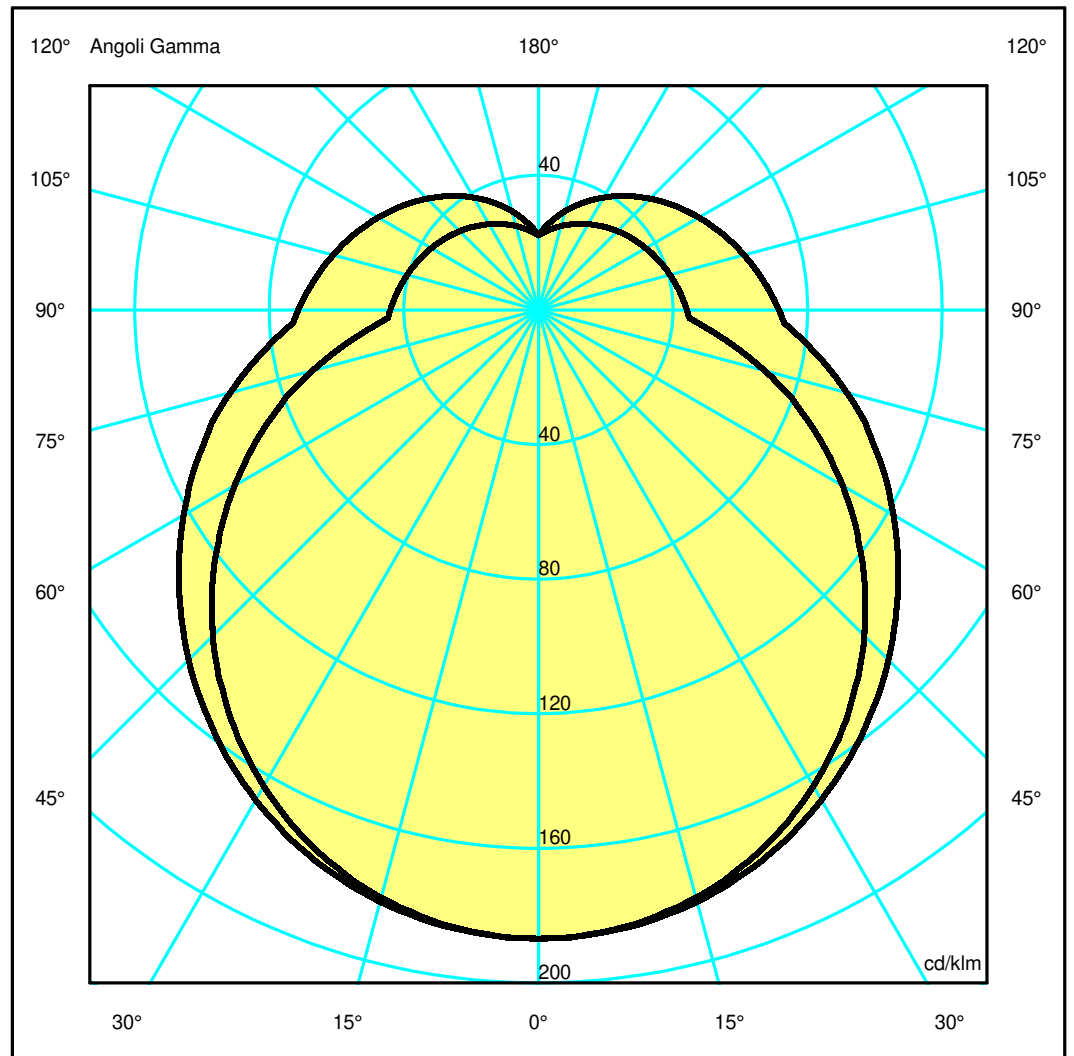

Luminaire

Code 1215F00A
Name AOL MINI W F UPPERCASE

Measurment.


Code FTS2400012
Name AOL MINI W F UPPERCASE

Luminaire Flux	699 lm	Luminaire Power	7.0 W	Efficacy	99.857 lm/W	Efficiency	100.00%
Source Flux	699 lm	Maximum value	186.85 cd/klm	Position	C=70.00 G=2.00	CG	Asymmetrical
Rectangular Luminaire		Length	355 mm	Width	245 mm	Height	42 mm
Rectangular Luminous Area		Length	355 mm	Width	41 mm	Height	25 mm
Horizontal Luminous Area		0.014555 m2		Emitting area on Plane 180°		0.008875 m2	
Emitting area on Plane 0°		0.008875 m2		Emitting area on Plane 270°		0.001025 m2	
Emitting area on Plane 90°		0.001025 m2		Glare area at 76°		0.012133 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		19-12-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		699 lm	
LED Flux=882lm LED Power=7W Eff=79% EfcLed=126lm/W EfcLum=100lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	36 65 86 72 100			D DIN 5040	B21		
F UTE	0.72 H + 0.28 T			B NBN	BZ 6		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	3.94	7.88	11.82	15.76	19.71	OC	2.12	4.23	6.35	8.47	10.58
OB	3.94	7.88	11.82	15.76	19.71	OD	2.12	4.23	6.35	8.47	10.58

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	130.59	130.17	127.27	121.48	113.11	102.78	91.21	79.10	66.32	53.42
OB	130.59	130.17	127.27	121.48	113.11	102.78	91.21	79.10	66.32	53.42
OC	130.59	130.04	126.38	119.09	108.75	95.70	80.84	64.85	48.60	33.64
OD	130.59	130.04	126.38	119.09	108.75	95.70	80.84	64.85	48.60	33.64

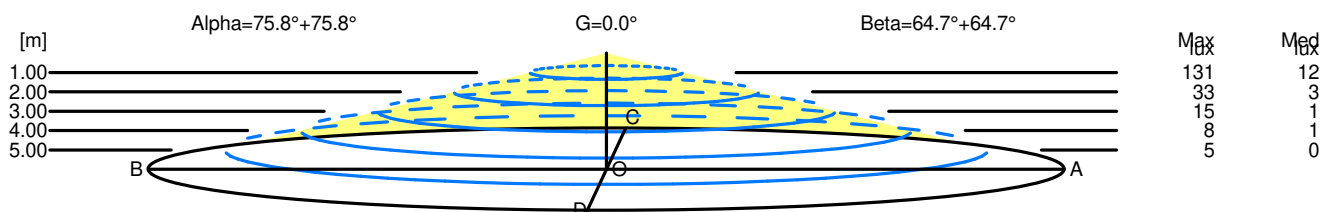

H[m]	D[m]	Max lux	Med lux	Alpha=75.8°+75.8°	G=0.0
1.00	7.88	131	12		
2.00	15.76	33	3		
3.00	23.65	15	1		
4.00	31.53	8	1		
5.00	39.41	5	0		

H[m]	D[m]	Max lux	Med lux	Beta=64.7°+64.7°	G=0.0
1.00	4.23	131	12		
2.00	8.47	33	3		
3.00	12.70	15	1		
4.00	16.94	8	1		
5.00	21.17	5	0		