

Luminaire

Code 1215V00A
Name AOL MINI W V UPPERCASE

Measurement

Code FTS2400028
Name AOL MINI W V UPPERCASE

Luminaire Flux	946 lm	Luminaire Power	9.0 W	Efficacy	105.111 lm/W	Efficiency	100.00%
Source Flux	946 lm	Maximum value	186.86 cd/klm	Position	C=70.00 G=2.00	CG	Asymmetrical
Rectangular Luminaire		Length	355 mm	Width	245 mm	Height	42 mm
Rectangular Luminous Area		Length	355 mm	Width	60 mm	Height	25 mm
Horizontal Luminous Area		0.021300 m ²		Emitting area on Plane 180°	0.008875 m ²		
Emitting area on Plane 0°		0.008875 m ²		Emitting area on Plane 270°	0.001500 m ²		
Emitting area on Plane 90°		0.001500 m ²		Glare area at 76°	0.013764 m ²		
Coordinate system		CG		Symmetry Type	Asymmetrical		
Date		19-12-2023		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	946 lm		


LED Flux=1194lm LED Power=9W Eff=79% EfcLed=133lm/W EfcLum=105lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 36 65 86 72 100
F UTE 0.72 H + 0.28 T

D DIN 5040
B NBN

B21
BZ 6


355mm x 245mm



Sempiani C

180.0 ——— 0.0
270.0 ——— 90.0

ULOR 27.80 %
DLOR 72.20 %
RN 27.80 %

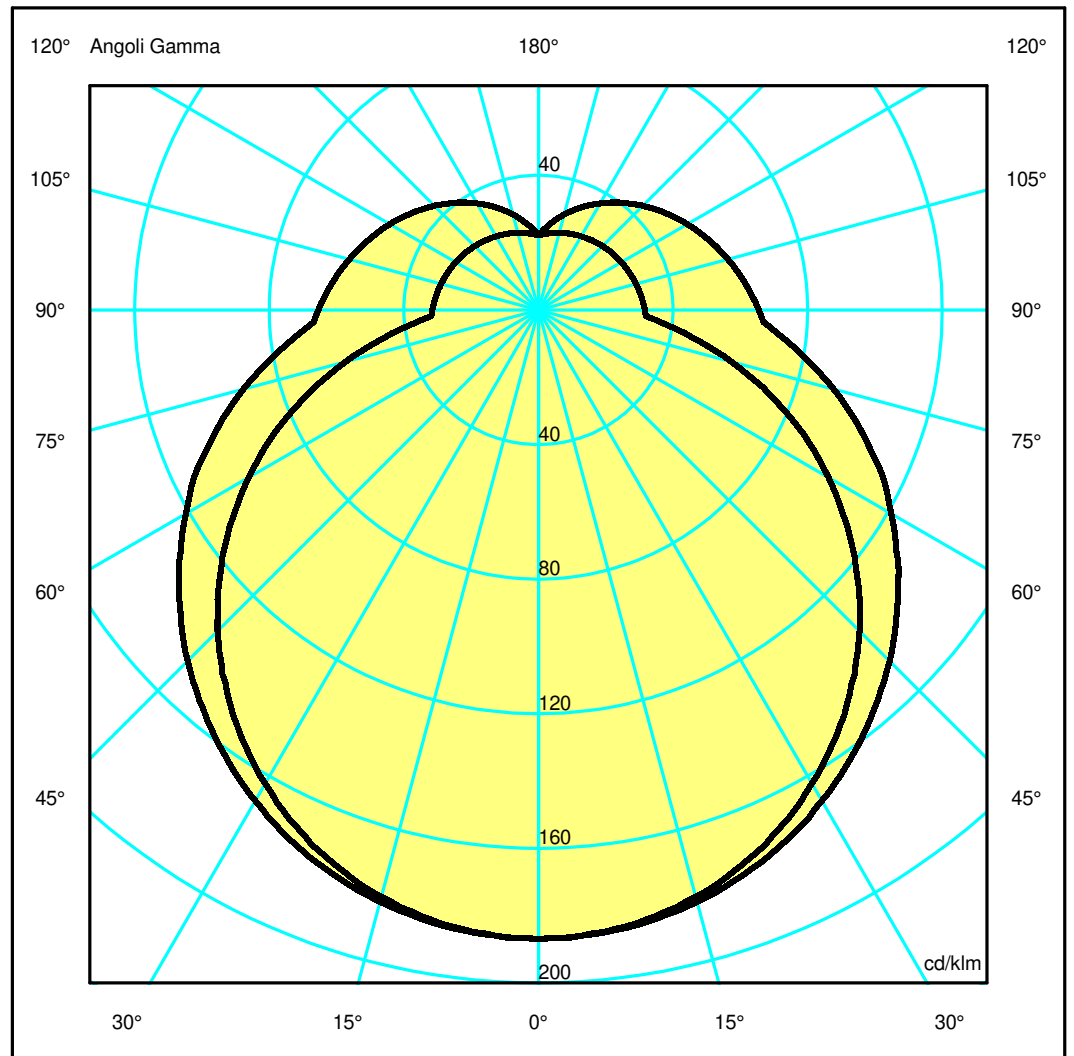

Luminaire

Code 1215V00A
Name AOL MINI W V UPPERCASE

Measurerm.


Code FTS2400028
Name AOL MINI W V UPPERCASE

Luminaire Flux	946 lm	Luminaire Power	9.0 W	Efficacy	105.111 lm/W	Efficiency	100.00%
Source Flux	946 lm	Maximum value	186.86 cd/klm	Position	C=70.00 G=2.00	CG	Asymmetrical
Rectangular Luminaire		Length	355 mm	Width	245 mm	Height	42 mm
Rectangular Luminous Area		Length	355 mm	Width	60 mm	Height	25 mm
Horizontal Luminous Area		0.021300 m2		Emitting area on Plane 180°		0.008875 m2	
Emitting area on Plane 0°		0.008875 m2		Emitting area on Plane 270°		0.001500 m2	
Emitting area on Plane 90°		0.001500 m2		Glare area at 76°		0.013764 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		19-12-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		946 lm	
LED Flux=1194lm LED Power=9W Eff=79% EfcLed=133lm/W EfcLum=105lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	36 65 86 72 100			D DIN 5040	B21		
F UTE	0.72 H + 0.28 T			B NBN	BZ 6		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	3.43	6.86	10.30	13.73	17.16	OC	1.91	3.82	5.73	7.64	9.55
OB	3.43	6.86	10.30	13.73	17.16	OD	1.91	3.82	5.73	7.64	9.55

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	176.74	176.13	172.25	164.58	153.36	139.55	123.43	105.93	85.91	66.56
OB	176.74	176.13	172.25	164.58	153.36	139.55	123.43	105.93	85.91	66.56
OC	176.74	175.92	170.76	160.57	146.05	127.66	106.04	82.00	56.17	33.37
OD	176.74	175.92	170.76	160.57	146.05	127.66	106.04	82.00	56.17	33.37

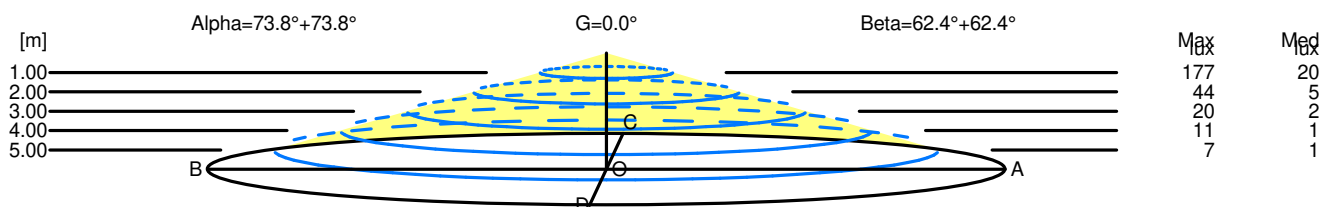

H[m]	D[m]	Max lux	Med lux	Alpha=73.8°+73.8°	G=0.0
1.00	6.86	177	20		
2.00	13.73	44	5		
3.00	20.59	20	2		
4.00	27.45	11	1		
5.00	34.32	7	1		

H[m]	D[m]	Max lux	Med lux	Beta=62.4°+62.4°	G=0.0
1.00	3.82	177	20		
2.00	7.64	44	5		
3.00	11.47	20	2		
4.00	15.29	11	1		
5.00	19.11	7	1		