


Luminaire

Code 1402010APP_RGB
Name AMELUNA RGB sospensione - solo RGB - APP COMPATIBILE

Measurem.

Code FTS1901522
Name AMELUNA RGB sospensione - solo RGB - APP COMPATIBILE

Luminaire Flux	138.59 lm	Luminaire Power	4.00 W	Efficacy	34.65 lm/W	Efficiency	100.00%
Lamps Flux	138.59 lm	Maximum value	1034.06 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 80 mm Diam. 76 mm	Height	180 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004536 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.001097 m2				
Coordinate system Date Measurement Distance	CG 15-12-2016 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 138.59 lm				
RDN160575							
C.I.E. F UTE	80 93 98 93 100 0.93 B + 0.07 T	D DIN 5040 B NBN	A61 BZ 1 / 4 / BZ 2				

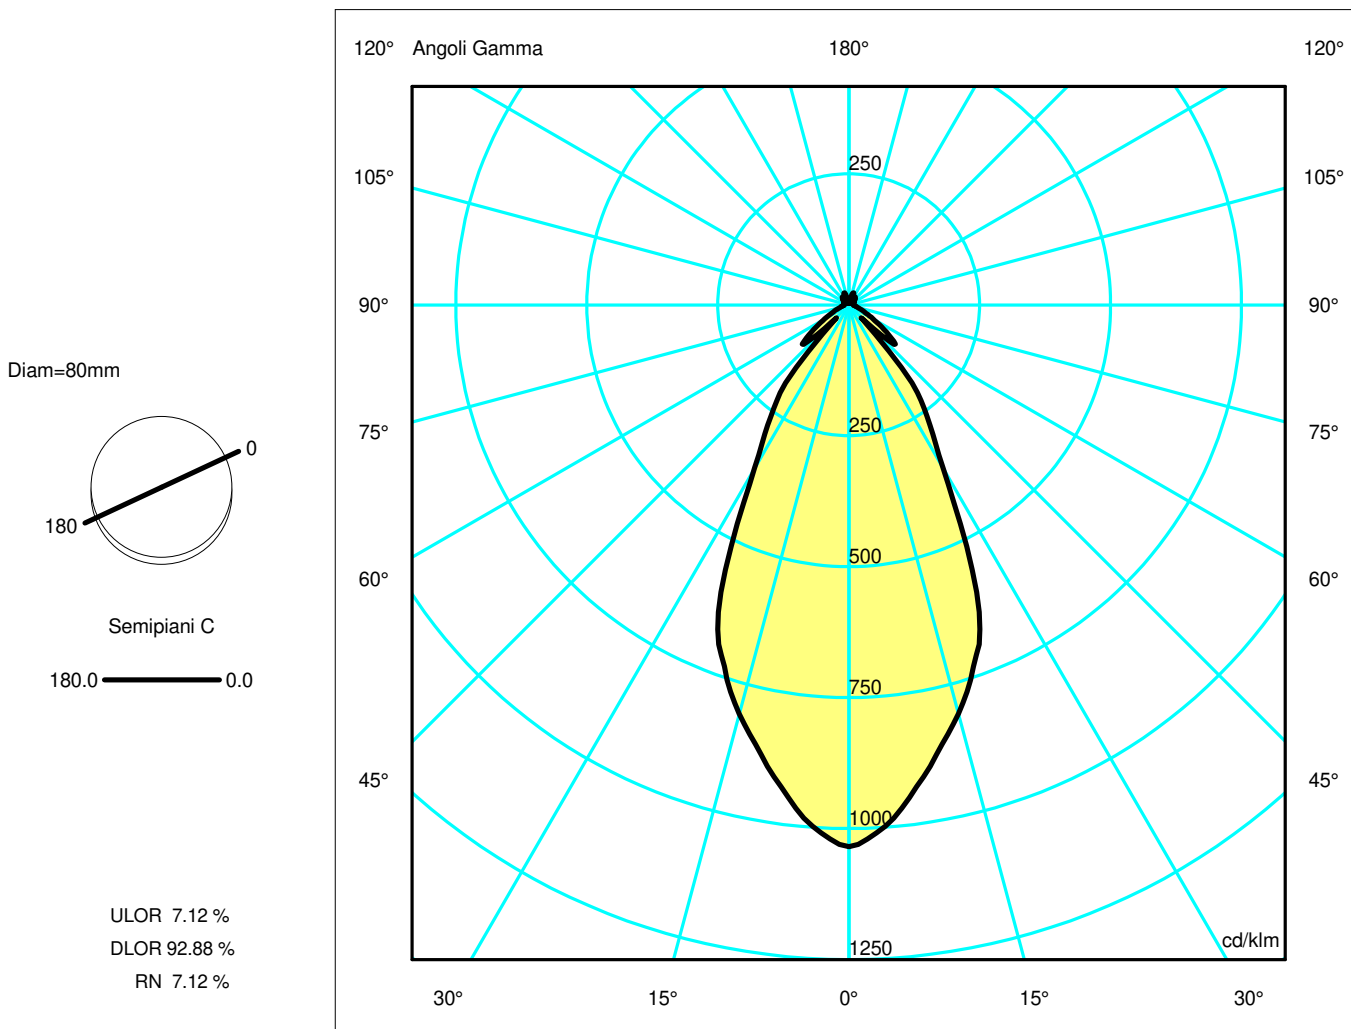

Luminaire

Code 1402010APP_RGB
Name AMELUNA RGB sospensione - solo RGB - APP COMPATIBILE

Measurement


Code FTS1901522
Name AMELUNA RGB sospensione - solo RGB - APP COMPATIBILE

Luminaire Flux	138.59 lm	Luminaire Power	4.00 W	Efficacy	34.65 lm/W	Efficiency	100.00%
Lamps Flux	138.59 lm	Maximum value	1034.06 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	80 mm 76 mm	Height Height	180 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004536 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001097 m2	
Coordinate system Date Measurement Distance		CG 15-12-2016 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 138.59 lm	
RDN160575							
C.I.E. F UTE	80 93 98 93 100 0.93 B + 0.07 T			D DIN 5040 B NBN	A61 BZ 1 / 4 / BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.97	1.46	1.94	2.43	OC	0.49	0.97	1.46	1.94	2.43
OB	0.49	0.97	1.46	1.94	2.43	OD	0.49	0.97	1.46	1.94	2.43

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	143.31	136.34	111.98	77.28	36.02	6.17	11.30	4.82	2.31	1.37
OB	143.31	136.34	111.98	77.28	36.02	6.17	11.30	4.82	2.31	1.37
OC	143.31	136.34	111.98	77.28	36.02	6.17	11.30	4.82	2.31	1.37
OD	143.31	136.34	111.98	77.28	36.02	6.17	11.30	4.82	2.31	1.37

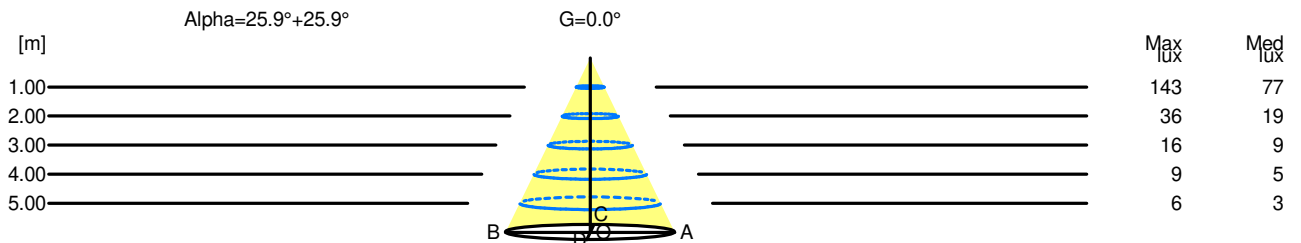

H[m]	D[m]	Max lux	Med lux	Alpha=25.9°+25.9°	G=0.0
1.00	0.97	143	77		
2.00	1.94	36	19		
3.00	2.92	16	9		
4.00	3.89	9	5		
5.00	4.86	6	3		