


Luminaire

Code 1753020A
Name LA PETITE LETTURA BIANCO

Measurement

Code FTS1700001-B
Name LA PETITE LETTURA BIANCO

Luminaire Flux	872 lm	Luminaire Power	12.0 W	Efficacy	72.697 lm/W	Efficiency	57.35%
Source Flux	1521 lm	Maximum value	163.85 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	300 mm	Height	208 mm		
Round Luminous Area		Diam.	300 mm	Height	0 mm		
Horizontal Luminous Area			0.070686 m ²	Emitting area on Plane 180°			0.000000 m ²
Emitting area on Plane 0°			0.000000 m ²	Emitting area on Plane 270°			0.000000 m ²
Emitting area on Plane 90°			0.000000 m ²	Glare area at 76°			0.017100 m ²
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		31-01-2023		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1521 lm
Lamping=LED 1x12W (E27) CCT=2700K CRI=80							
C.I.E.	47 78 95 82 57			D DIN 5040		B31	
F UTE	0.47 E + 0.10 T			B NBN		BZ 5	

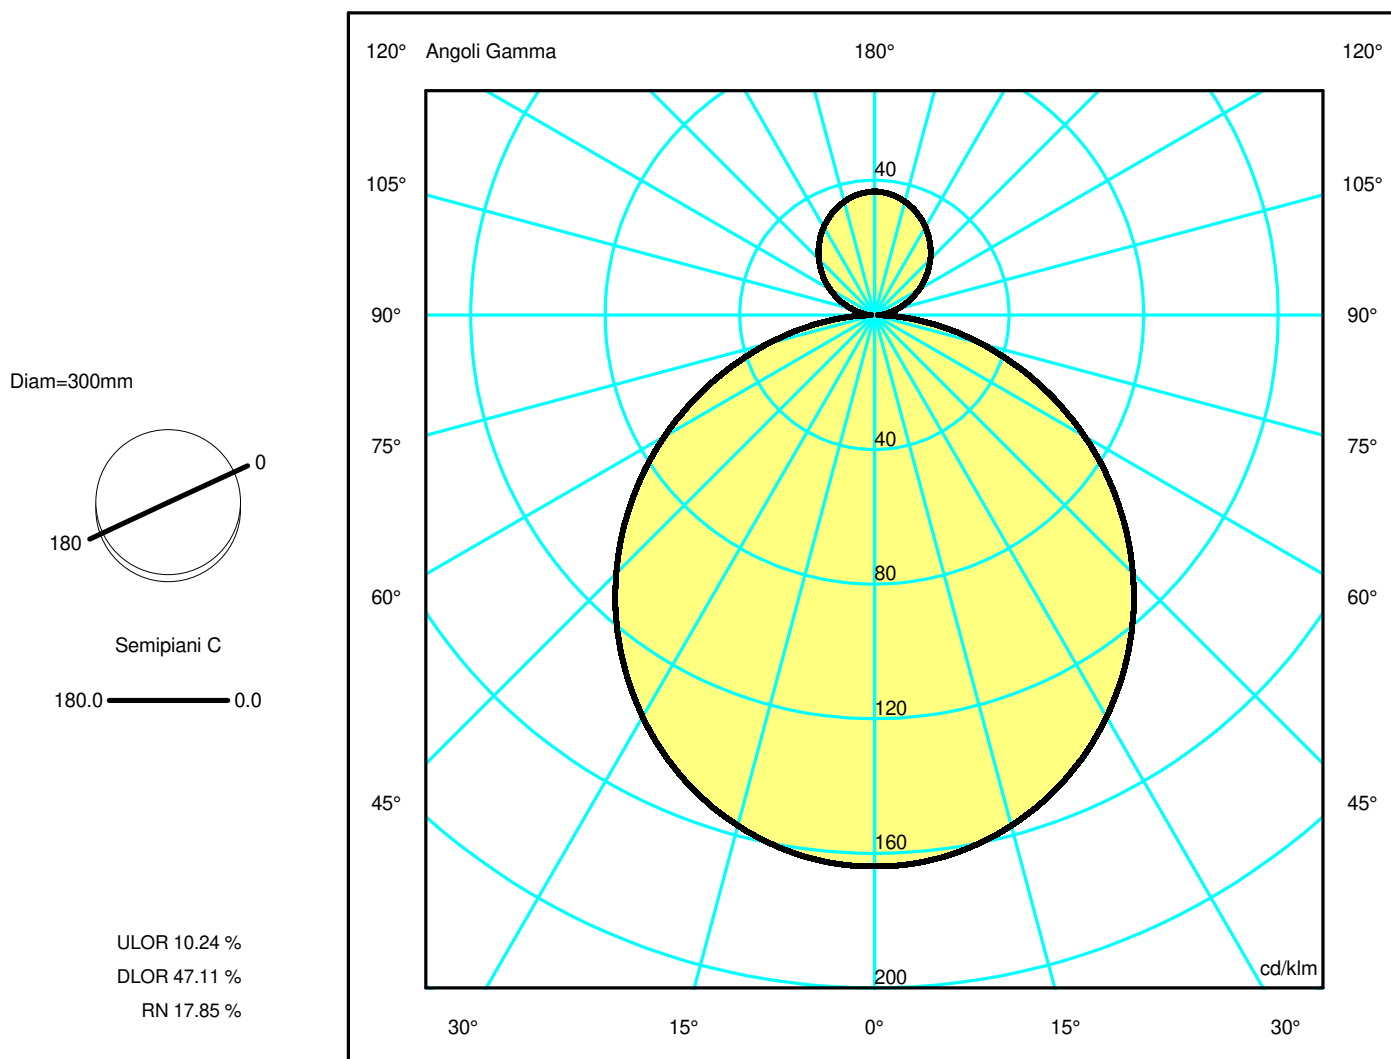

Luminaire

Code 1753020A
Name LA PETITE LETTURA BIANCO

Measurerm.


Code FTS1700001-B
Name LA PETITE LETTURA BIANCO

Luminaire Flux	872 lm	Luminaire Power	12.0 W	Efficacy	72.697 lm/W	Efficiency	57.35%
Source Flux	1521 lm	Maximum value	163.85 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	300 mm	Height	208 mm		
Round Luminous Area		Diam.	300 mm	Height	0 mm		
Horizontal Luminous Area			0.070686 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.017100 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		31-01-2023		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1521 lm
Lamping=LED 1x12W (E27) CCT=2700K CRI=80							
C.I.E.	47 78 95 82 57			D DIN 5040	B31		
F UTE	0.47 E + 0.10 T			B NBN	BZ 5		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.49	2.98	4.48	5.97	7.46	OC	1.49	2.98	4.48	5.97	7.46
OB	1.49	2.98	4.48	5.97	7.46	OD	1.49	2.98	4.48	5.97	7.46

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	249.10	248.20	238.94	221.39	196.39	165.14	129.10	89.67	49.86	14.69
OB	249.10	248.20	238.94	221.39	196.39	165.14	129.10	89.67	49.86	14.69
OC	249.10	248.20	238.94	221.39	196.39	165.14	129.10	89.67	49.86	14.69
OD	249.10	248.20	238.94	221.39	196.39	165.14	129.10	89.67	49.86	14.69

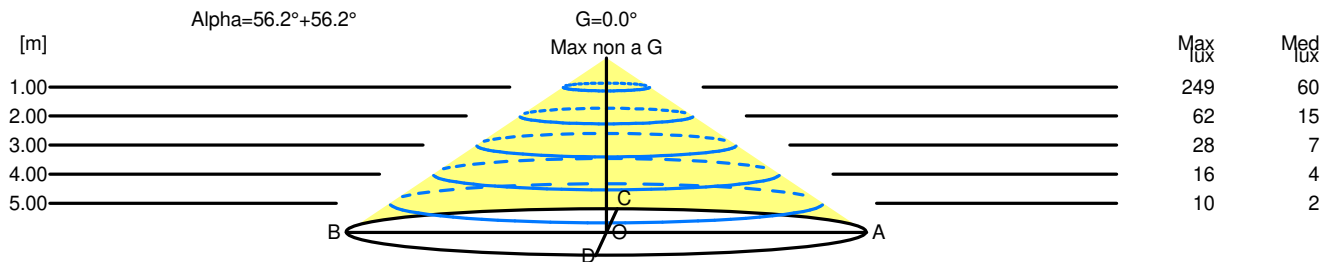

H[m]	D[m]	Max lux	Med lux	Alpha=56.2°+56.2°	G=0.0 Max non a G
1.00	2.98	249	60		
2.00	5.97	62	15		
3.00	8.95	28	7		
4.00	11.94	16	4		
5.00	14.92	10	2		