

## Luminaire

Code 1759020APP  
Name ILIO S 45 3000K APP BCO

## Measurement

Code FTS2400320.  
Name ILIO S 45 3000K APP BCO

Luminaire Flux	1443 lm	Luminaire Power	14.0 W	Efficacy	103.071 lm/W	Efficiency	100.00%
Source Flux	1443 lm	Maximum value	1255.44 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	460 mm		
Round Luminous Area		Diam.	65 mm	Height	0 mm		
Horizontal Luminous Area		0.003318 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000803 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		13-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1443 lm	
LED Flux=1864lm LED Power=12W Eff=77% EfcLed=157lm/W EfcLum=103lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	96 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=90mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

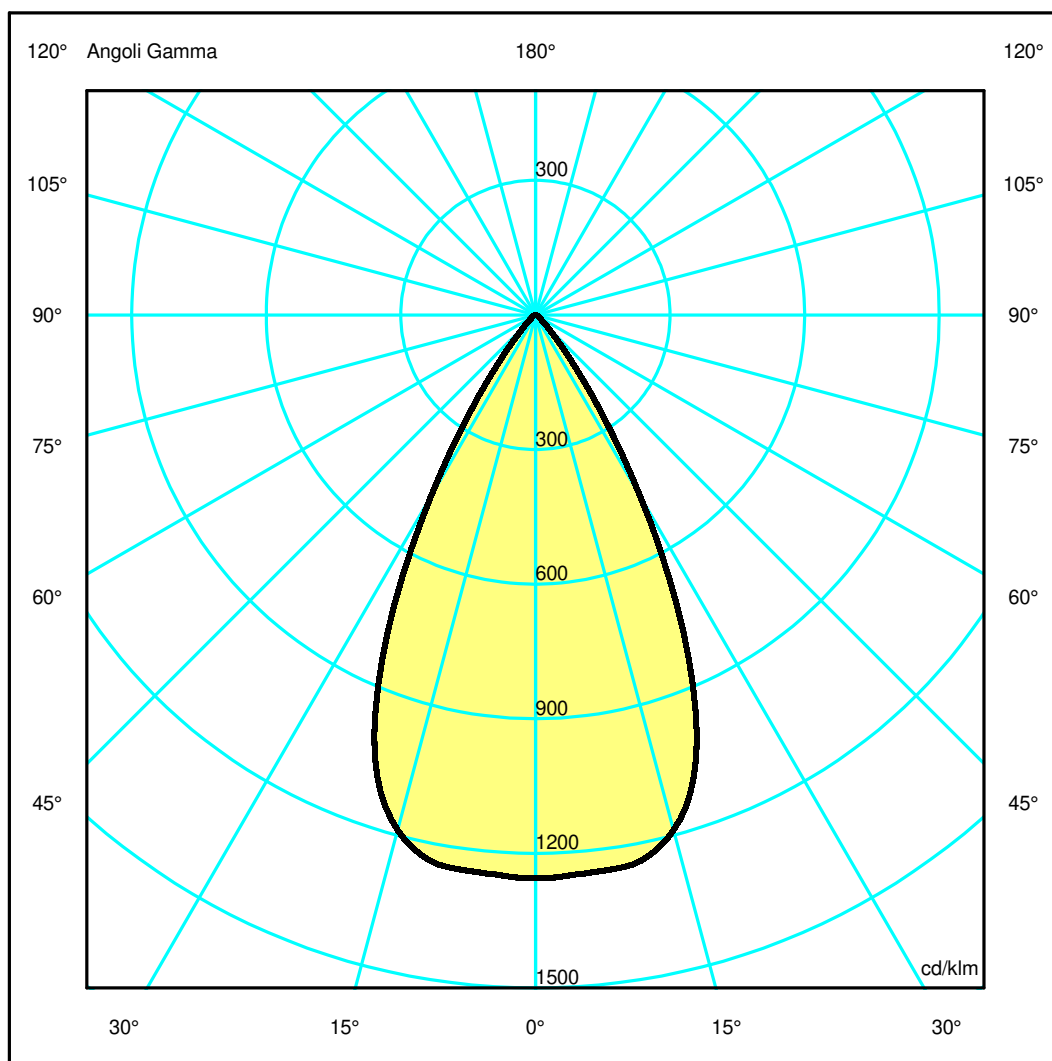

## Luminaire

Code 1759020APP  
Name ILIO S 45 3000K APP BCO

## Measurerm.


Code FTS2400320.  
Name ILIO S 45 3000K APP BCO

Luminaire Flux	1443 lm	Luminaire Power	14.0 W	Efficacy	103.071 lm/W	Efficiency	100.00%
Source Flux	1443 lm	Maximum value	1255.44 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	460 mm		
Round Luminous Area		Diam.	65 mm	Height	0 mm		
Horizontal Luminous Area		0.003318 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000803 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		13-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1443 lm	
LED Flux=1864lm LED Power=12W Eff=77% EfcLed=157lm/W EfcLum=103lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	96 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.52	1.04	1.56	2.07	2.59	OC	0.52	1.04	1.56	2.07	2.59
OB	0.52	1.04	1.56	2.07	2.59	OD	0.52	1.04	1.56	2.07	2.59

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1811.41	1802.82	1715.05	1124.77	320.76	53.76	17.16	9.34	5.39	1.22
OB	1811.41	1802.82	1715.05	1124.77	320.76	53.76	17.16	9.34	5.39	1.22
OC	1811.41	1802.82	1715.05	1124.77	320.76	53.76	17.16	9.34	5.39	1.22
OD	1811.41	1802.82	1715.05	1124.77	320.76	53.76	17.16	9.34	5.39	1.22

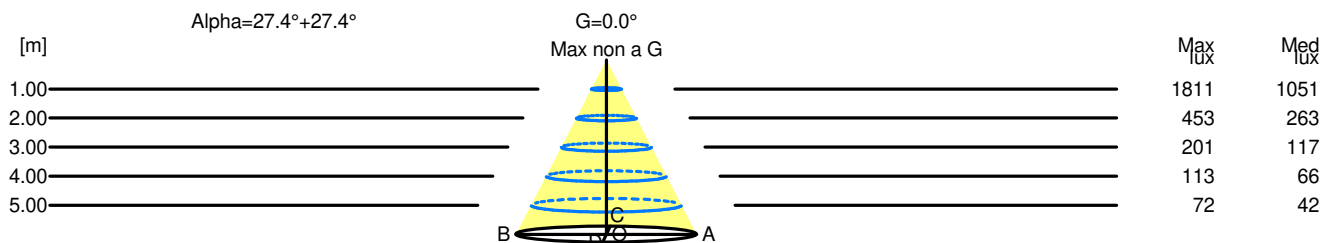

H[m]	D[m]	Max lux	Med lux	Alpha=27.4°+27.4°	G=0.0 Max non a G
1.00	1.04	1811	1051		
2.00	2.07	453	263		
3.00	3.11	201	117		
4.00	4.15	113	66		
5.00	5.19	72	42		