


Luminaire

Code 1994360APP
Name DISCOVERY VERTICAL 140 RGB+W APP COMP.BZ

Measurem.

Code FTS2000443
Name DISCOVERY VERTICAL 140 RGB+W APP COMP.BZ

Luminaire Flux	4123 lm	Luminaire Power	79.0 W	Efficacy	52.196 lm/W	Efficiency	100.00%
Source Flux	4123 lm	Maximum value	158.85 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical
Round Luminaire		Diam.	1400 mm	Height	17 mm		
Round Luminous Area		Diam.	1350 mm	Height	0 mm		
Horizontal Luminous Area			1.431388 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.346284 m2
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-11-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4123 lm	
LED Flux=6760,2lm LED Power=68W Eff=61% EfcLed=99lm/W EfcLum=52lm/W L70(6K)=60000 h							
C.I.E.	32 64 89 49 100			D DIN 5040	C22		
F UTE	0.49 I + 0.51 T			B NBN	BZ 6		

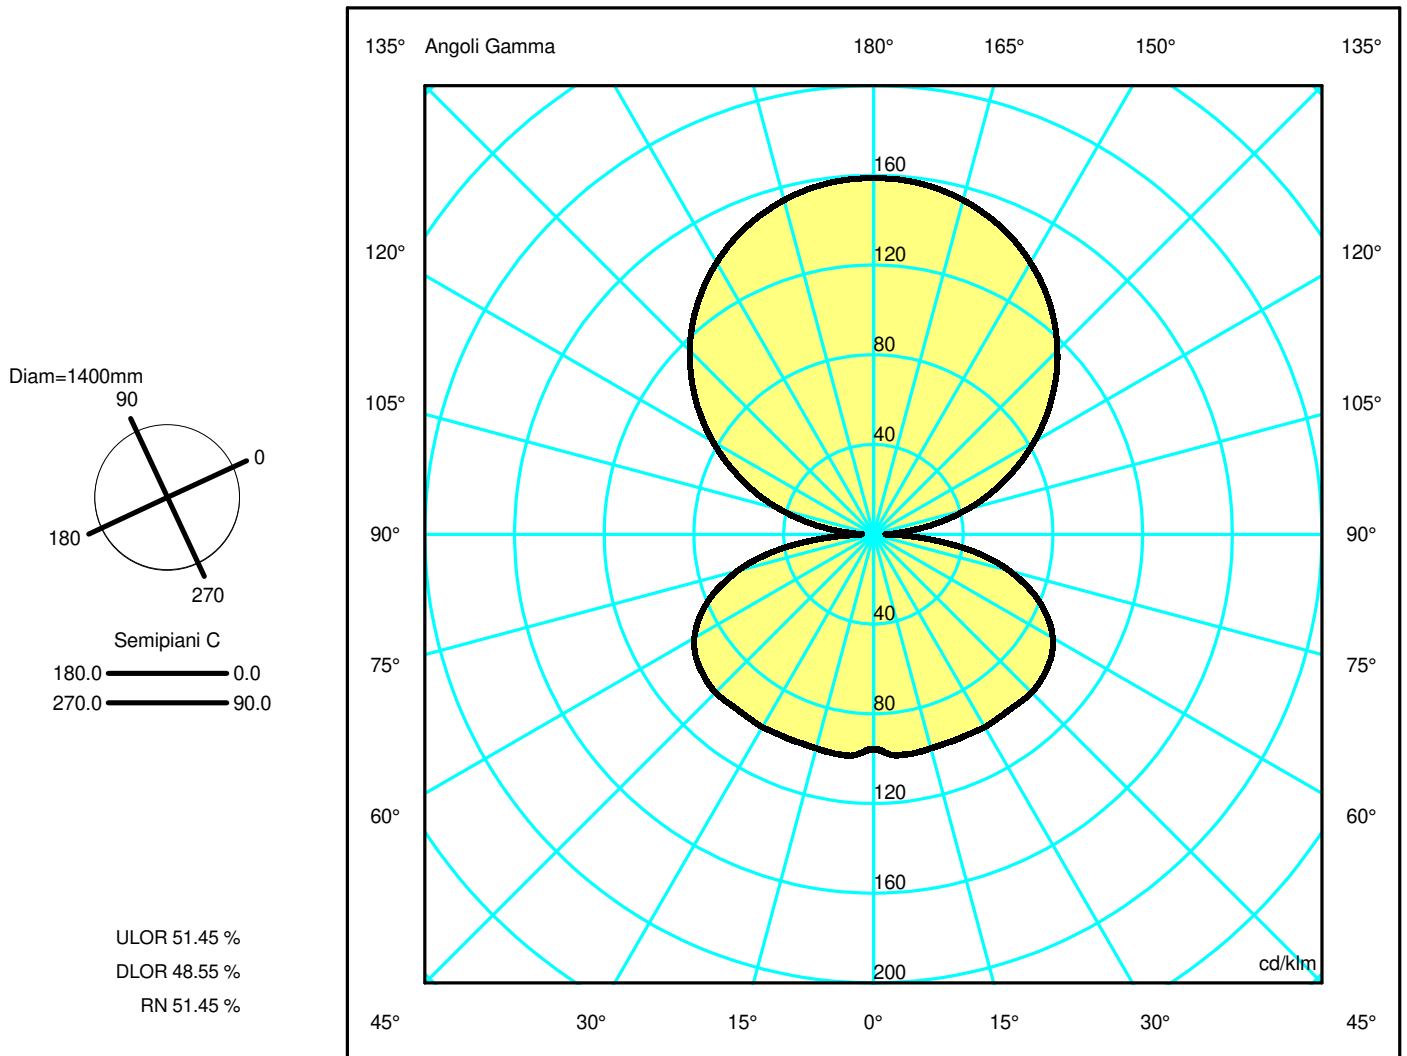

Luminaire

Code 1994360APP
Name DISCOVERY VERTICAL 140 RGB+W APP COMP.BZ

Measur.


Code FTS2000443
Name DISCOVERY VERTICAL 140 RGB+W APP COMP.BZ

Luminaire Flux	4123 lm	Luminaire Power	79.0 W	Efficacy	52.196 lm/W	Efficiency	100.00%
Source Flux	4123 lm	Maximum value	158.85 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical
Round Luminaire		Diam.	1400 mm	Height	17 mm		
Round Luminous Area		Diam.	1350 mm	Height	0 mm		
Horizontal Luminous Area			1.431388 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.346284 m2
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-11-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4123 lm	
LED Flux=6760,2lm LED Power=68W Eff=61% EfcLed=99lm/W EfcLum=52lm/W L70(6K)=60000 h							
C.I.E.	32 64 89 49 100			D DIN 5040	C22		
F UTE	0.49 I + 0.51 T			B NBN	BZ 6		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.83	3.66	5.49	7.31	9.14	OC	1.83	3.66	5.49	7.31	9.14
OB	1.83	3.66	5.49	7.31	9.14	OD	1.83	3.66	5.49	7.31	9.14

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	655.03	653.43	636.14	601.20	548.38	477.83	390.38	289.12	178.78	59.74
OB	655.03	653.43	636.14	601.20	548.38	477.83	390.38	289.12	178.78	59.74
OC	655.03	653.43	636.14	601.20	548.38	477.83	390.38	289.12	178.78	59.74
OD	655.03	653.43	636.14	601.20	548.38	477.83	390.38	289.12	178.78	59.74

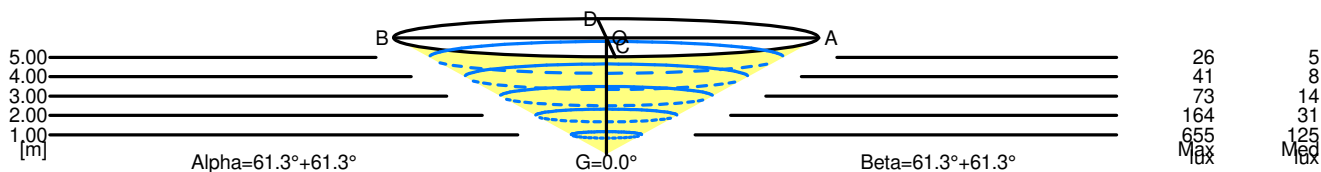

5.00	18.28	26	5	
4.00	14.63	41	8	
3.00	10.97	73	14	
2.00	7.31	164	31	
1.00	3.66	655	125	
H[m]	D[m]	Max lux	Med lux	Alpha=61.3°+61.3° G=0.0

5.00	18.29	26	5	
4.00	14.63	41	8	
3.00	10.97	73	14	
2.00	7.31	164	31	
1.00	3.66	655	125	
H[m]	D[m]	Max lux	Med lux	Beta=61.3°+61.3° G=0.0