

Luminaire

Code 2001060APP_W
Name DISCOVERY SPACE 90X90 S RGBW APP COMP BZ - WHITE

Measurement

Code FTS2000465-B
Name DISCOVERY SPACE 90X90 S RGBW APP COMP BZ - WHITE


Luminaire Flux	1087 lm	Luminaire Power	17.0 W	Efficacy	63.941 lm/W	Efficiency	100.00%
Source Flux	1087 lm	Maximum value	149.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area		0.810000 m2		Emitting area on Plane 180°	0.009000 m2		
Emitting area on Plane 0°		0.009000 m2		Emitting area on Plane 270°	0.009000 m2		
Emitting area on Plane 90°		0.009000 m2		Glare area at 76°	0.204689 m2		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		14-10-2022		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	1087 lm		

LED Flux=2015lm LED Power=13W Eff=54% EfcLed=159lm/W EfcLum=63lm/W CCT=3000K Ra=80 SDCM=5 L70(6K)=60000h


C.I.E. 41 72 92 50 100
F UTE 0.50 G + 0.50 T

D DIN 5040
B NBN

C31
BZ 5

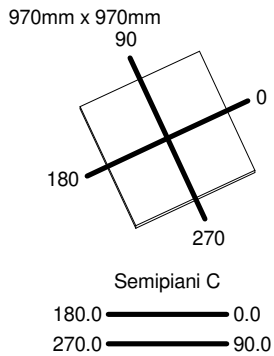

ULOR 50.14 %
DLOR 49.86 %
RN 50.14 %

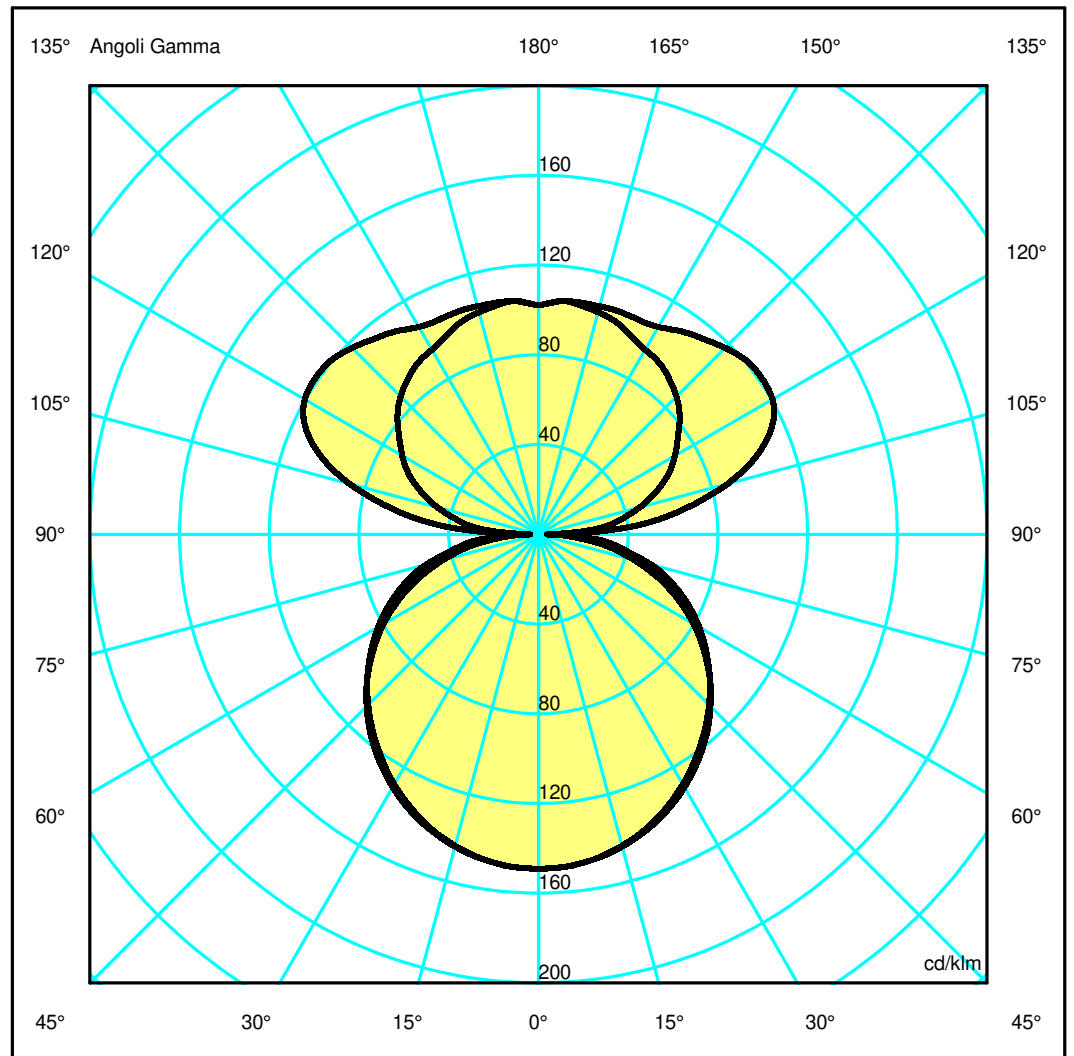

Luminaire

Code 2001060APP_W
Name DISCOVERY SPACE 90X90 S RGBW APP COMP BZ - WHITE

Measurerm.

Code FTS2000465-B
Name DISCOVERY SPACE 90X90 S RGBW APP COMP BZ - WHITE

Luminaire Flux	1087 lm	Luminaire Power	17.0 W	Efficacy	63.941 lm/W	Efficiency	100.00%
Source Flux	1087 lm	Maximum value	149.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area	0.810000 m2			Emitting area on Plane 180°	0.009000 m2		
Emitting area on Plane 0°	0.009000 m2			Emitting area on Plane 270°	0.009000 m2		
Emitting area on Plane 90°	0.009000 m2			Glare area at 76°	0.204689 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	14-10-2022			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1087 lm		


LED Flux=2015lm LED Power=13W Eff=54% EfcLed=159lm/W EfcLum=63lm/W CCT=3000K Ra=80 SDCM=5 L70(6K)=60000h

C.I.E.	41 72 92 50 100	D DIN 5040	C31
F UTE	0.50 G + 0.50 T	B NBN	BZ 5

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.08	4.17	6.25	8.33	10.42	OC	1.91	3.82	5.74	7.65	9.56
OB	2.08	4.17	6.25	8.33	10.42	OD	1.91	3.82	5.74	7.65	9.56

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	162.00	161.49	156.25	146.26	132.55	116.81	99.24	79.66	56.33	28.96
OB	162.00	161.49	156.25	146.26	132.55	116.81	99.24	79.66	56.33	28.96
OC	162.00	161.40	156.61	147.58	134.39	117.84	97.70	74.58	47.96	19.00
OD	162.00	161.40	156.61	147.58	134.39	117.84	97.70	74.58	47.96	19.00

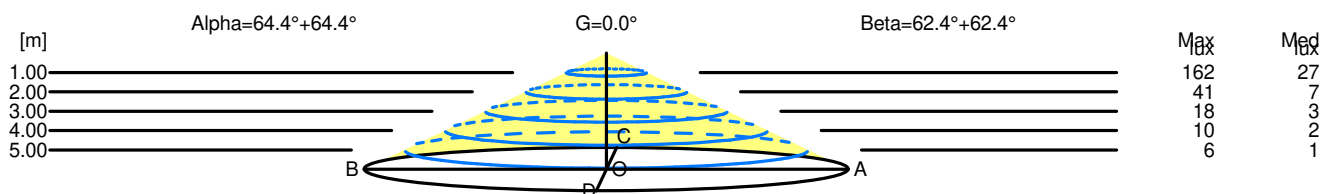

H[m]	D[m]	Max lux	Med lux	Alpha=64.4°+64.4°	G=0.0
1.00	4.17	162	27		
2.00	8.33	41	7		
3.00	12.50	18	3		
4.00	16.67	10	2		
5.00	20.84	6	1		

H[m]	D[m]	Max lux	Med lux	Beta=62.4°+62.4°	G=0.0
1.00	3.82	162	27		
2.00	7.65	41	7		
3.00	11.47	18	3		
4.00	15.30	10	2		
5.00	19.12	6	1		