

## Luminaire

Code 2061010APP\_650mA EU  
 Name RIPPLE 70 SOSPENSIONE APP\_650mA EU

## Measurerm.

Code FTS2200036  
 Name RIPPLE 70 SOSPENSIONE APP\_650mA EU

Luminaire Flux	2159 lm	Luminaire Power	29.0 W	Efficacy	74.459 lm/W	Efficiency	100.00%
Source Flux	2159 lm	Maximum value	353.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	700 mm	Height	60 mm		
Round Luminous Area		Diam.	650 mm	Height	0 mm		
Horizontal Luminous Area			0.331831 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.080277 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		18-02-2022		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2159 lm


LED Flux=4254lm LED Power=25W Eff=51% EfcLed=168lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E. 47 79 96 100 100  
 F UTE 1.00 E

D DIN 5040  
 B NBN

A30  
 BZ 5 / 1.25 / BZ 4

Diam=700mm




Sempiani C

180.0 ——— 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

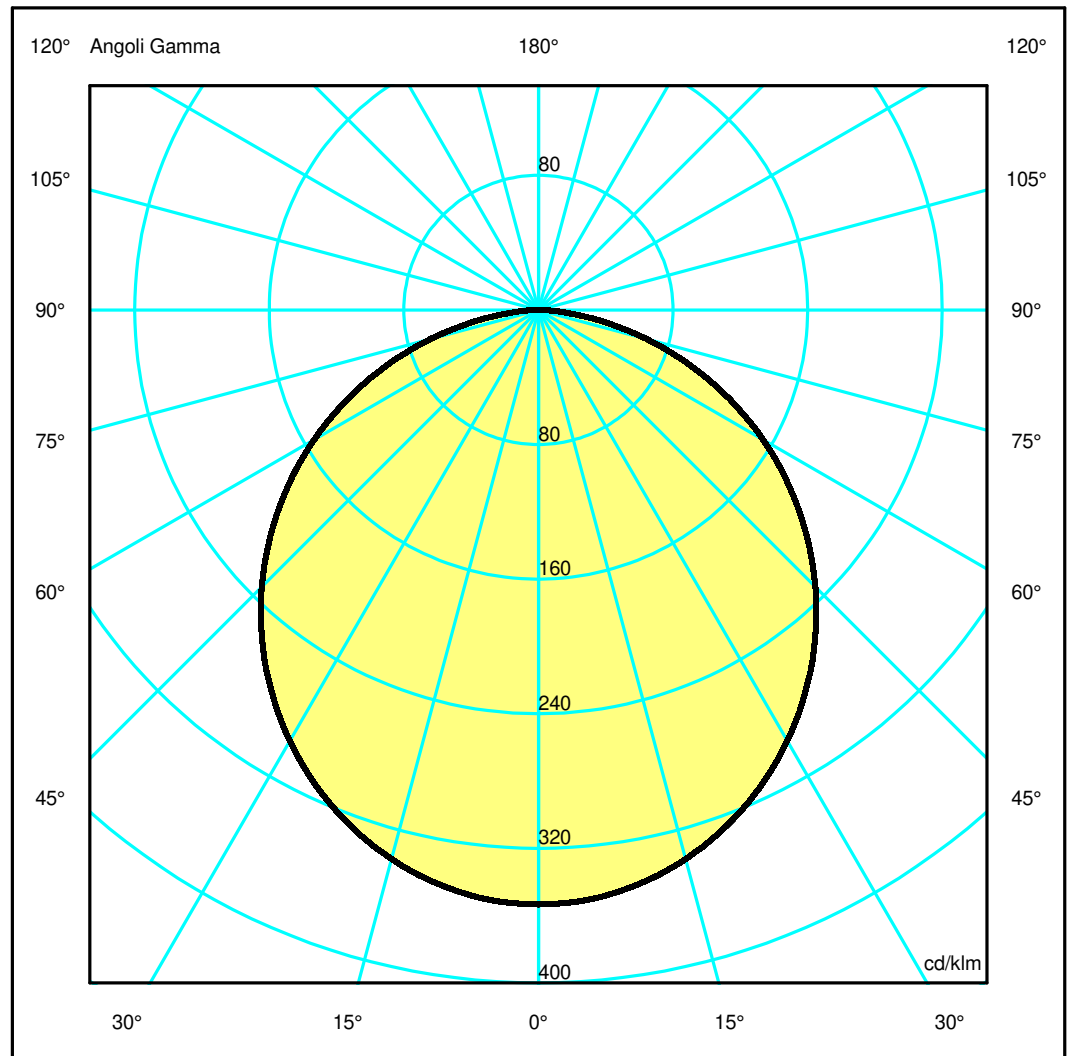

## Luminaire

Code 2061010APP\_650mA EU  
Name RIPPLE 70 SOSPENSIONE APP\_650mA EU

## Measurerm.


Code FTS2200036  
Name RIPPLE 70 SOSPENSIONE APP\_650mA EU

Luminaire Flux	2159 lm	Luminaire Power	29.0 W	Efficacy	74.459 lm/W	Efficiency	100.00%
Source Flux	2159 lm	Maximum value	353.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	700 mm	Height	60 mm		
Round Luminous Area		Diam.	650 mm	Height	0 mm		
Horizontal Luminous Area		0.331831 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.080277 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-02-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2159 lm	
LED Flux=4254lm LED Power=25W Eff=51% EfcLed=168lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	47 79 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 5 / 1.25 / BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.48	2.96	4.44	5.91	7.39	OC	1.48	2.96	4.44	5.91	7.39
OB	1.48	2.96	4.44	5.91	7.39	OD	1.48	2.96	4.44	5.91	7.39

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	762.87	759.12	729.39	674.43	597.51	502.34	392.13	270.83	143.31	32.40
OB	762.87	759.12	729.39	674.43	597.51	502.34	392.13	270.83	143.31	32.40
OC	762.87	759.12	729.39	674.43	597.51	502.34	392.13	270.83	143.31	32.40
OD	762.87	759.12	729.39	674.43	597.51	502.34	392.13	270.83	143.31	32.40

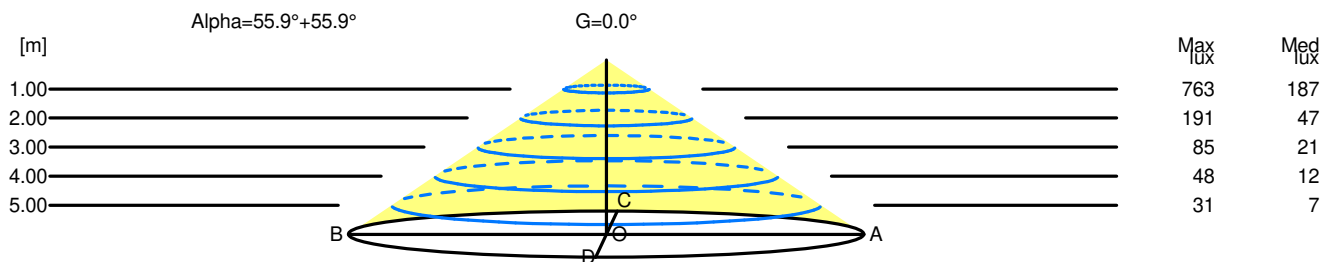

H[m]	D[m]	Max lux	Med lux	Alpha=55.9°+55.9°	G=0.0
1.00	2.96	763	187		
2.00	5.91	191	47		
3.00	8.87	85	21		
4.00	11.83	48	12		
5.00	14.79	31	7		