

Luminaire

Code A240600
Name NUR SOSPENSIONE HALO GRIGIO

Measurement

Code FTS002568-A
Name NUR SOSPENSIONE HALO GRIGIO

Luminaire Flux	1417 lm	Luminaire Power	21.0 W	Efficacy	67.461 lm/W	Efficiency	57.78%
Source Flux	2452 lm	Maximum value	249.20 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	550 mm 300 mm	Width Height	550 mm 0 mm	Height	430 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.070686 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.017100 m2				
Coordinate system Date Measurement Distance	CG 18-01-2022 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 2452 lm				
Lamping=LED DIM 1x21W (E27) CCT=2700K CRI=80							
C.I.E. F UTE	63 90 98 94 58 0.55 C + 0.03 T	D DIN 5040 B NBN	A51 BZ 3				

550mm x 550mm




Semipiani C

180.0 ——— 0.0

ULOR 3.23 %

DLOR 54.55 %

RN 5.59 %

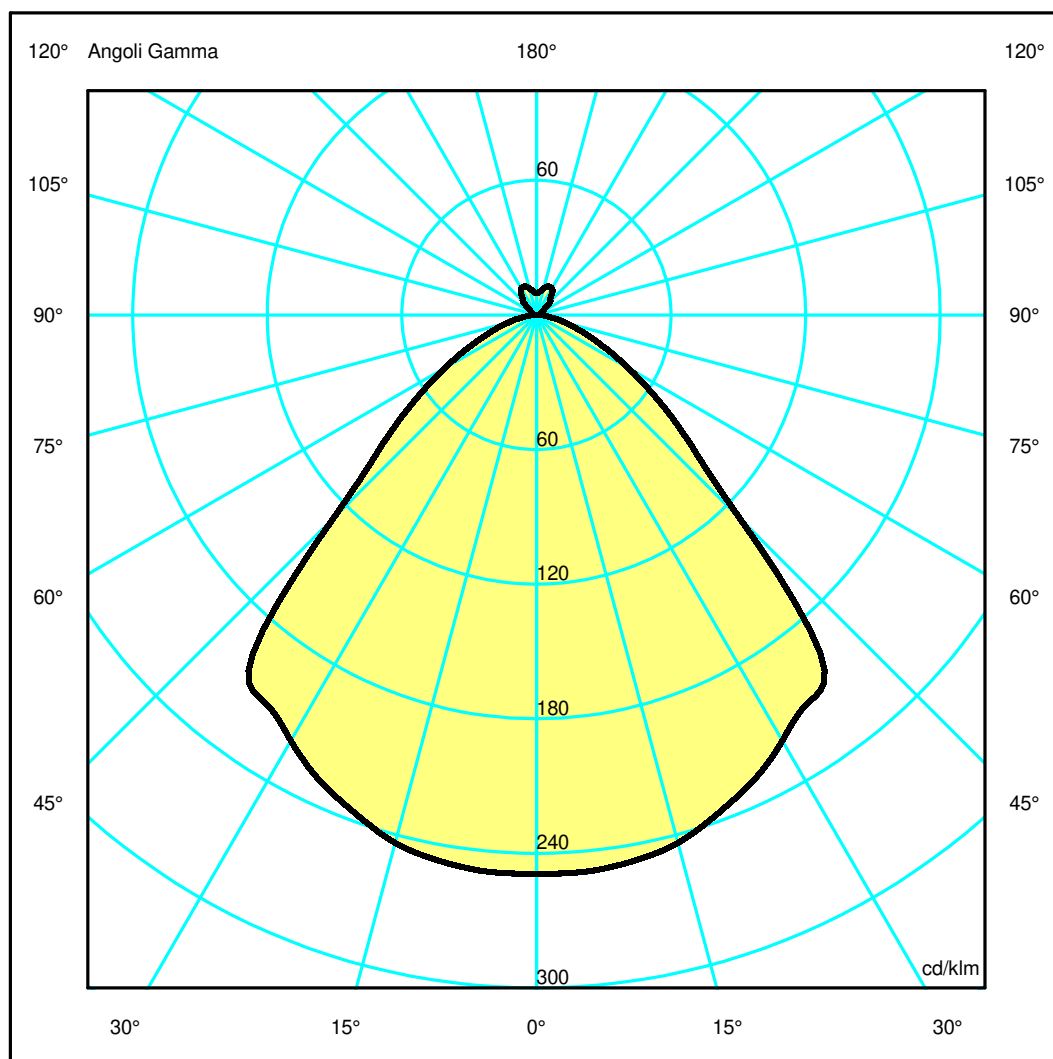

Luminaire

Code A240600
Name NUR SOSPENSIONE HALO GRIGIO

Measurerm.


Code FTS002568-A
Name NUR SOSPENSIONE HALO GRIGIO

Luminaire Flux	1417 lm	Luminaire Power	21.0 W	Efficacy	67.461 lm/W	Efficiency	57.78%
Source Flux	2452 lm	Maximum value	249.20 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	550 mm 300 mm	Width Height	550 mm 0 mm	Height	430 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.070686 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.017100 m2	
Coordinate system Date Measurement Distance		CG 18-01-2022 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2452 lm	
Lamping=LED DIM 1x21W (E27) CCT=2700K CRI=80							
C.I.E. F UTE	63 90 98 94 58 0.55 C + 0.03 T			D DIN 5040 B NBN	A51 BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.01	2.02	3.03	4.04	5.05	OC	1.01	2.02	3.03	4.04	5.05
OB	1.01	2.02	3.03	4.04	5.05	OD	1.01	2.02	3.03	4.04	5.05

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	611.04	610.88	597.22	561.15	517.18	313.86	162.59	79.06	33.12	8.73
OB	611.04	610.88	597.22	561.15	517.18	313.86	162.59	79.06	33.12	8.73
OC	611.04	610.88	597.22	561.15	517.18	313.86	162.59	79.06	33.12	8.73
OD	611.04	610.88	597.22	561.15	517.18	313.86	162.59	79.06	33.12	8.73

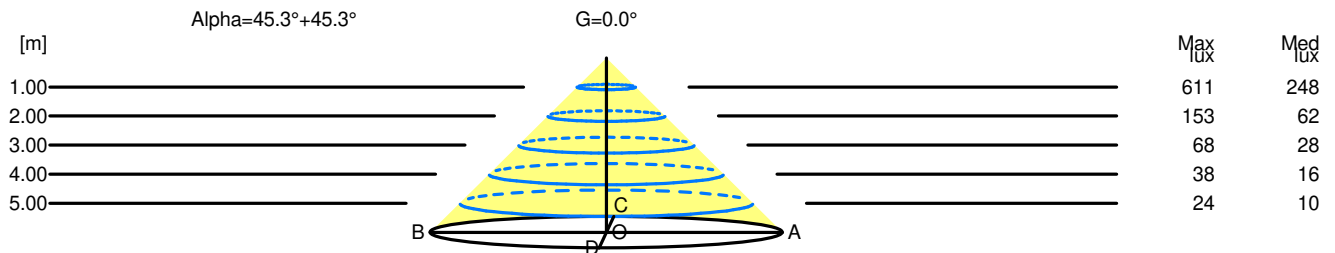

H[m]	D[m]	Max lux	Med lux	Alpha=45.3°+45.3°	G=0.0
1.00	2.02	611	248		
2.00	4.04	153	62		
3.00	6.06	68	28		
4.00	8.09	38	16		
5.00	10.11	24	10		