

Luminaire

Code A243200
Name NUR 1618 Led S aluminium grey

Measurerm.

Code FTS1502870
Name NUR 1618 Led S aluminium grey

Luminaire Flux	4308 lm	Luminaire Power	80.0 W	Efficacy	53.851 lm/W	Efficiency	100.00%
Source Flux	4308 lm	Maximum value	485.23 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	900 mm	Height	665 mm		
Round Luminous Area		Diam.	870 mm	Height	0 mm		
Horizontal Luminous Area			0.594468 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.143815 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-03-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4308 lm	


LED Flux=9047lm LED Power=74W Eff=48% EfcLed=122lm/W EfcLum=54lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h

C.I.E. 70 93 99 94 100
F UTE 0.94 C + 0.06 T

D DIN 5040
B NBN

A51
BZ 2

Diam=900mm




Semipiani C

180.0 ——— 0.0

ULOR 5.87 %

DLOR 94.13 %

RN 5.87 %

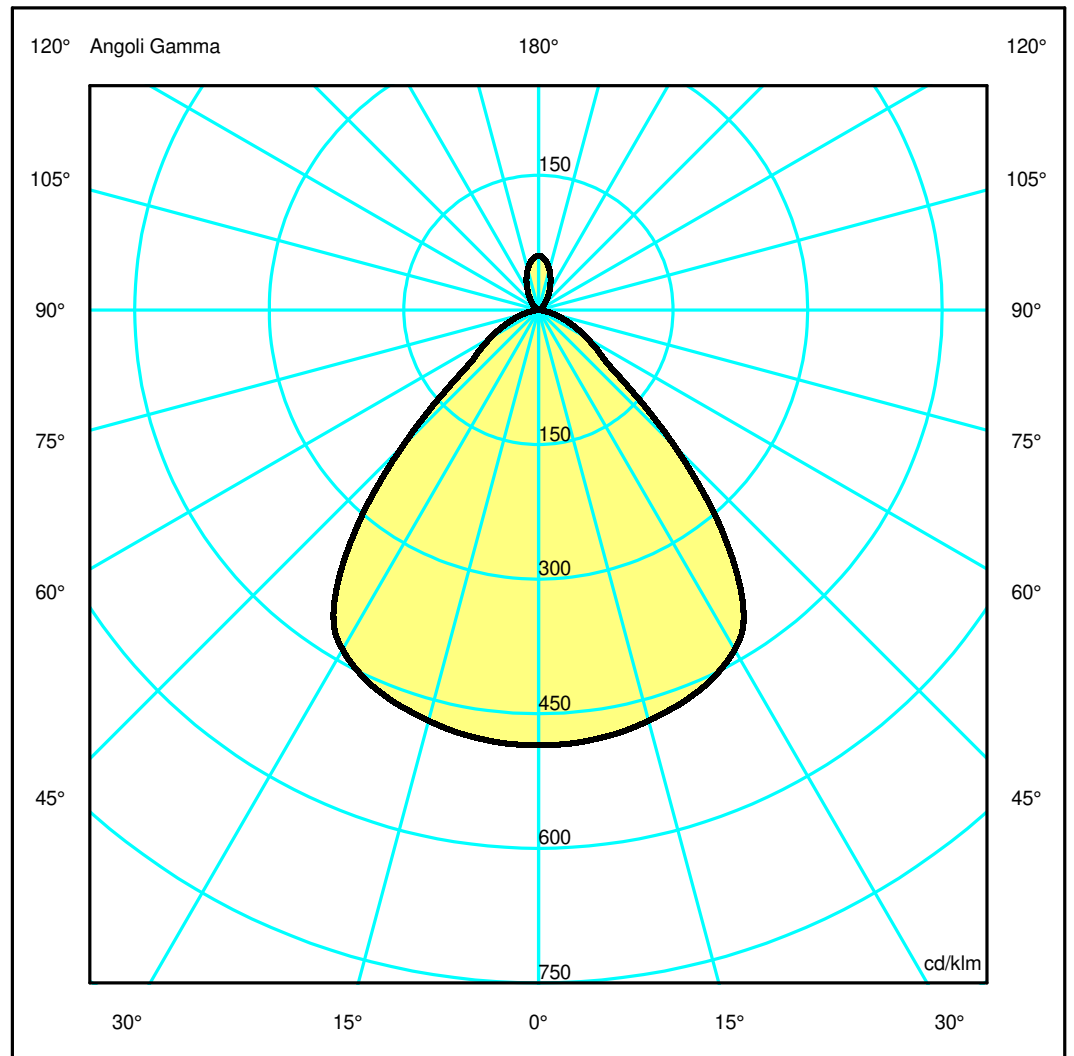

Luminaire

Code A243200
Name NUR 1618 Led S aluminium grey

Measurerm.


Code FTS1502870
Name NUR 1618 Led S aluminium grey

Luminaire Flux	4308 lm	Luminaire Power	80.0 W	Efficacy	53.851 lm/W	Efficiency	100.00%
Source Flux	4308 lm	Maximum value	485.23 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	900 mm	Height	665 mm		
Round Luminous Area		Diam.	870 mm	Height	0 mm		
Horizontal Luminous Area			0.594468 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.143815 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		17-03-2015		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			4308 lm
LED Flux=9047lm LED Power=74W Eff=48% EfcLed=122lm/W EfcLum=54lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	70 93 99 94 100			D DIN 5040	A51		
F UTE	0.94 C + 0.06 T			B NBN	BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.95	1.91	2.86	3.81	4.76	OC	0.95	1.91	2.86	3.81	4.76
OB	0.95	1.91	2.86	3.81	4.76	OD	0.95	1.91	2.86	3.81	4.76

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2090.41	2085.11	2041.07	1959.67	1709.61	922.65	356.42	192.91	78.84	9.34
OB	2090.41	2085.11	2041.07	1959.67	1709.61	922.65	356.42	192.91	78.84	9.34
OC	2090.41	2085.11	2041.07	1959.67	1709.61	922.65	356.42	192.91	78.84	9.34
OD	2090.41	2085.11	2041.07	1959.67	1709.61	922.65	356.42	192.91	78.84	9.34

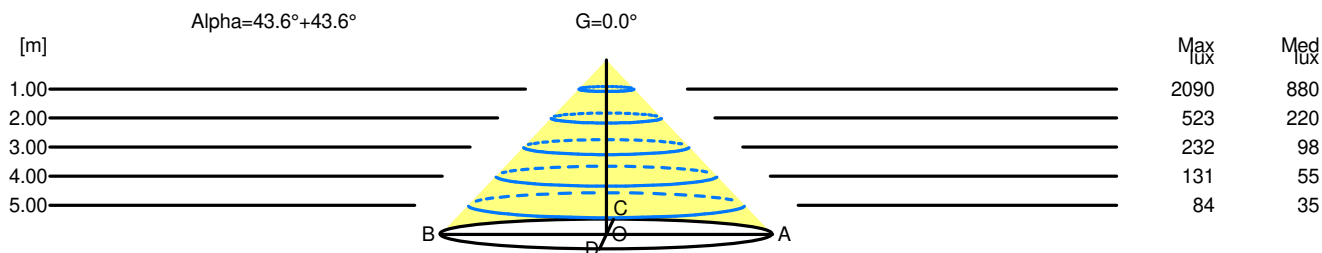

H[m]	D[m]	Max lux	Med lux	Alpha=43.6°+43.6°	G=0.0
1.00	1.91	2090	880		
2.00	3.81	523	220		
3.00	5.72	232	98		
4.00	7.62	131	55		
5.00	9.53	84	35		