

## Luminaire


Code A244200  
Name NUR MINI PLAFONE HALO GRIGIO

## Measurem.

Code FTS002564-A  
Name NUR MINI PLAFONE HALO GRIGIO

Luminaire Flux	1127 lm	Luminaire Power	21.0 W	Efficacy	53.645 lm/W	Efficiency	45.94%
Source Flux	2452 lm	Maximum value	156.62 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	365 mm 288 mm	Width Height	365 mm 0 mm	Height	274 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.065144 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.015760 m2				
Coordinate system Date Measurement Distance	CG 18-01-2022 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 2452 lm				
Lamping=LED DIM 1x21W (E27) CCT=2700K CRI=80							
C.I.E. F UTE	47 78 95 98 46 0.45 E + 0.01 T	D DIN 5040 B NBN	A31 BZ 5				

365mm x 365mm




Semipiani C

180.0 ——— 0.0

ULOR 0.85 %

DLOR 45.10 %

RN 1.84 %

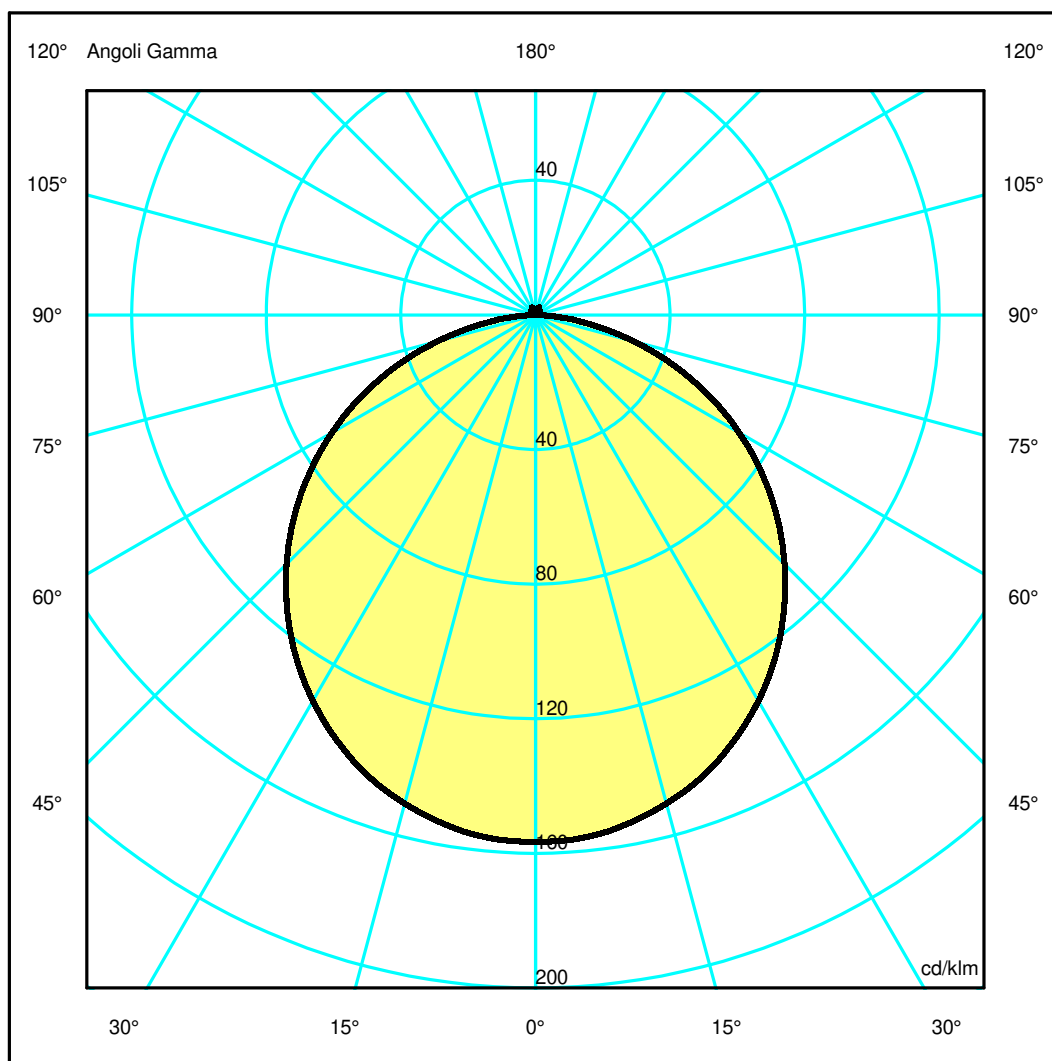

## Luminaire

Code A244200  
Name NUR MINI PLAFONE HALO GRIGIO

## Measur.


Code FTS002564-A  
Name NUR MINI PLAFONE HALO GRIGIO

Luminaire Flux	1127 lm	Luminaire Power	21.0 W	Efficacy	53.645 lm/W	Efficiency	45.94%
Source Flux	2452 lm	Maximum value	156.62 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	365 mm 288 mm	Width Height	365 mm 0 mm	Height	274 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.065144 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.015760 m2	
Coordinate system Date Measurement Distance		CG 18-01-2022 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2452 lm	
Lamping=LED DIM 1x21W (E27) CCT=2700K CRI=80							
C.I.E. F UTE	47 78 95 98 46 0.45 E + 0.01 T			D DIN 5040 B NBN	A31 BZ 5		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.52	3.03	4.55	6.07	7.58	OC	1.52	3.03	4.55	6.07	7.58
OB	1.52	3.03	4.55	6.07	7.58	OD	1.52	3.03	4.55	6.07	7.58

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	384.03	382.61	368.39	342.18	304.41	256.59	201.49	139.96	74.40	17.84
OB	384.03	382.61	368.39	342.18	304.41	256.59	201.49	139.96	74.40	17.84
OC	384.03	382.61	368.39	342.18	304.41	256.59	201.49	139.96	74.40	17.84
OD	384.03	382.61	368.39	342.18	304.41	256.59	201.49	139.96	74.40	17.84

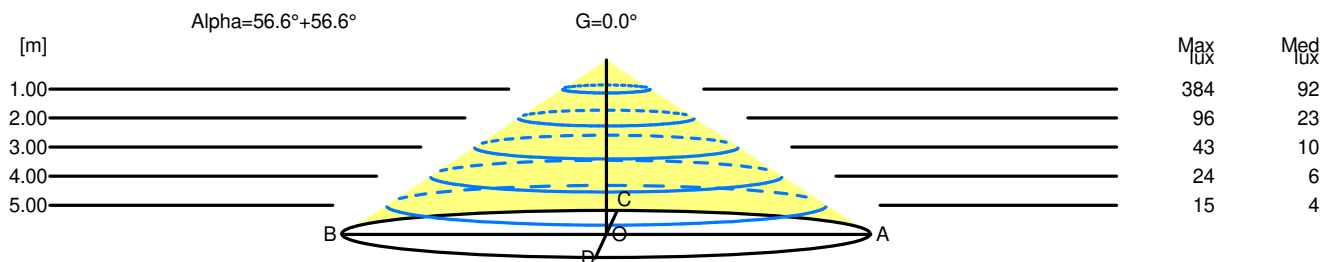

H[m]	D[m]	Max lux	Med lux	Alpha=56.6°+56.6°	G=0.0
1.00	3.03	384	92		
2.00	6.07	96	23		
3.00	9.10	43	10		
4.00	12.13	24	6		
5.00	15.17	15	4		