

Luminaire


Code A244910
Name NUR MINI GLOSS SOSPENSIONE HALO NERO

Measurement

Code FTS002560-A
Name NUR MINI GLOSS SOSPENSIONE HALO NERO

Luminaire Flux	1013 lm	Luminaire Power	21.0 W	Efficacy	48.239 lm/W	Efficiency	41.31%
Source Flux	2452 lm	Maximum value	141.07 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	365 mm 355 mm	Width Height	365 mm 0 mm	Height	274 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.098980 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.023945 m2				
Coordinate system Date Measurement Distance	CG 18-01-2022 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 2452 lm				
Lamping=LED DIM 1x21W (E27) CCT=2700K CRI=80							
C.I.E. F UTE	49 80 96 91 41 0.38 E + 0.04 T	D DIN 5040 B NBN	A31 BZ 4				

365mm x 365mm




Semipiani C

180.0 ——— 0.0

ULOR 3.80 %

DLOR 37.52 %

RN 9.19 %

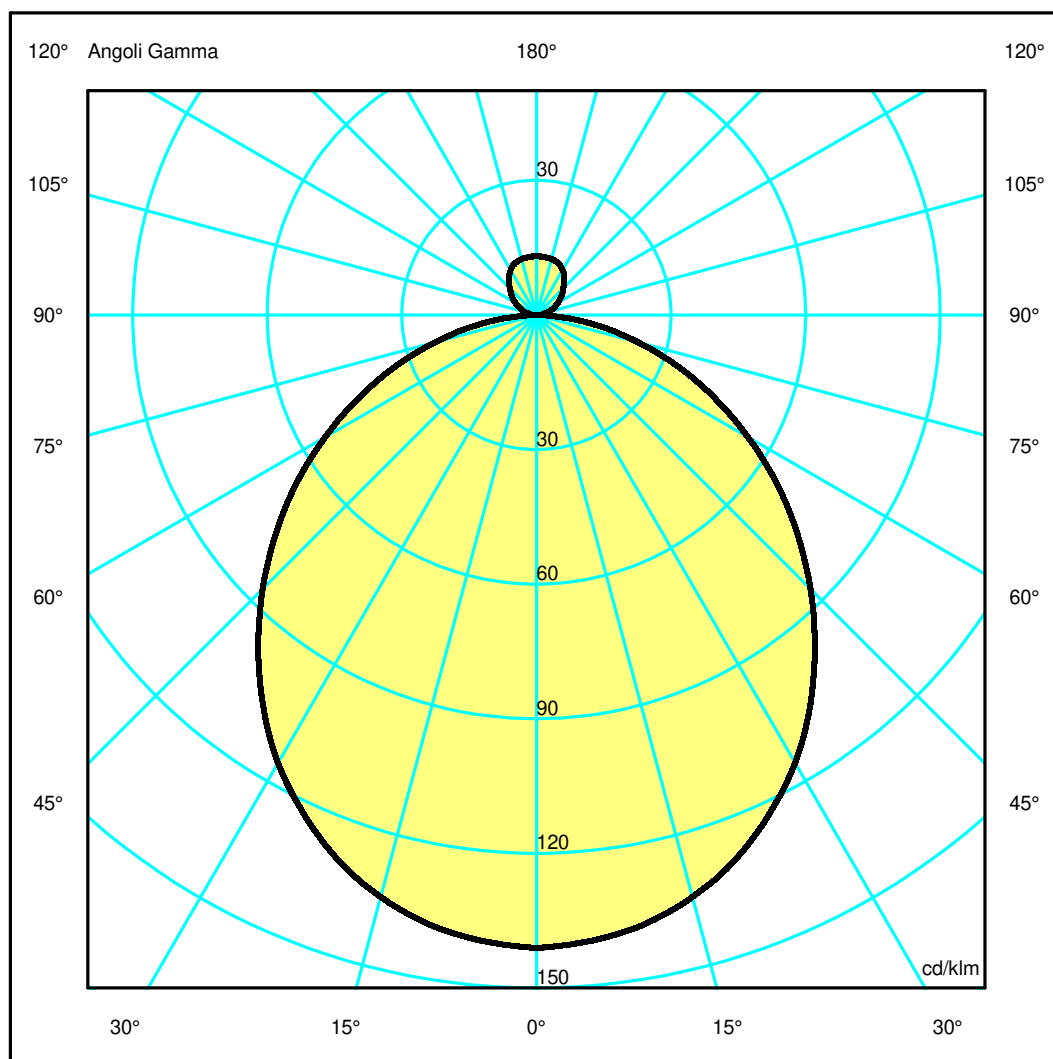

Luminaire

Code A244910
Name NUR MINI GLOSS SOSPENSIONE HALO NERO

Measurerm.


Code FTS002560-A
Name NUR MINI GLOSS SOSPENSIONE HALO NERO

Luminaire Flux	1013 lm	Luminaire Power	21.0 W	Efficacy	48.239 lm/W	Efficiency	41.31%
Source Flux	2452 lm	Maximum value	141.07 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	365 mm 355 mm	Width Height	365 mm 0 mm	Height	274 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.098980 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.023945 m2	
Coordinate system Date Measurement Distance		CG 18-01-2022 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2452 lm	
Lamping=LED DIM 1x21W (E27) CCT=2700K CRI=80							
C.I.E. F UTE	49 80 96 91 41 0.38 E + 0.04 T			D DIN 5040 B NBN	A31 BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.31	2.61	3.92	5.22	6.53	OC	1.31	2.61	3.92	5.22	6.53
OB	1.31	2.61	3.92	5.22	6.53	OD	1.31	2.61	3.92	5.22	6.53

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	345.90	343.28	329.25	300.95	260.64	211.72	160.21	107.57	57.79	14.85
OB	345.90	343.28	329.25	300.95	260.64	211.72	160.21	107.57	57.79	14.85
OC	345.90	343.28	329.25	300.95	260.64	211.72	160.21	107.57	57.79	14.85
OD	345.90	343.28	329.25	300.95	260.64	211.72	160.21	107.57	57.79	14.85

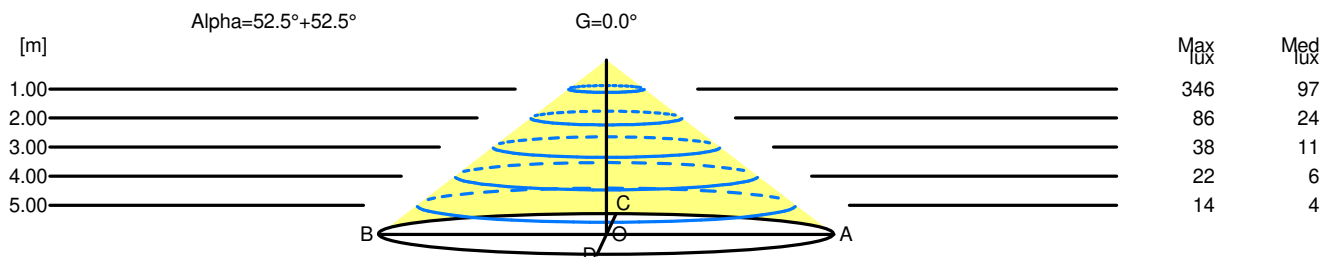

H[m]	D[m]	Max lux	Med lux	Alpha=52.5°+52.5°	G=0.0
1.00	2.61	346	97		
2.00	5.22	86	24		
3.00	7.83	38	11		
4.00	10.44	22	6		
5.00	13.05	14	4		