

Luminaire

Code AB00409
 Name Tagora 80 incasso New led Verde 4000K Flood

Measurement

Code FTS2400226.
 Name Tagora 80 incasso New led Verde 4000K Flood

Luminaire Flux	1290 lm	Luminaire Power	10.0 W	Efficacy	129.000 lm/W	Efficiency	100.00%
Source Flux	1290 lm	Maximum value	2701.94 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	154 mm		
Round Luminous Area		Diam.	70 mm	Height	0 mm		
Horizontal Luminous Area			0.003848 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000931 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1290 lm	
LED Flux=1777lm LED Power=10W Eff=73% EfcLed=178lm/W EfcLum=129lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

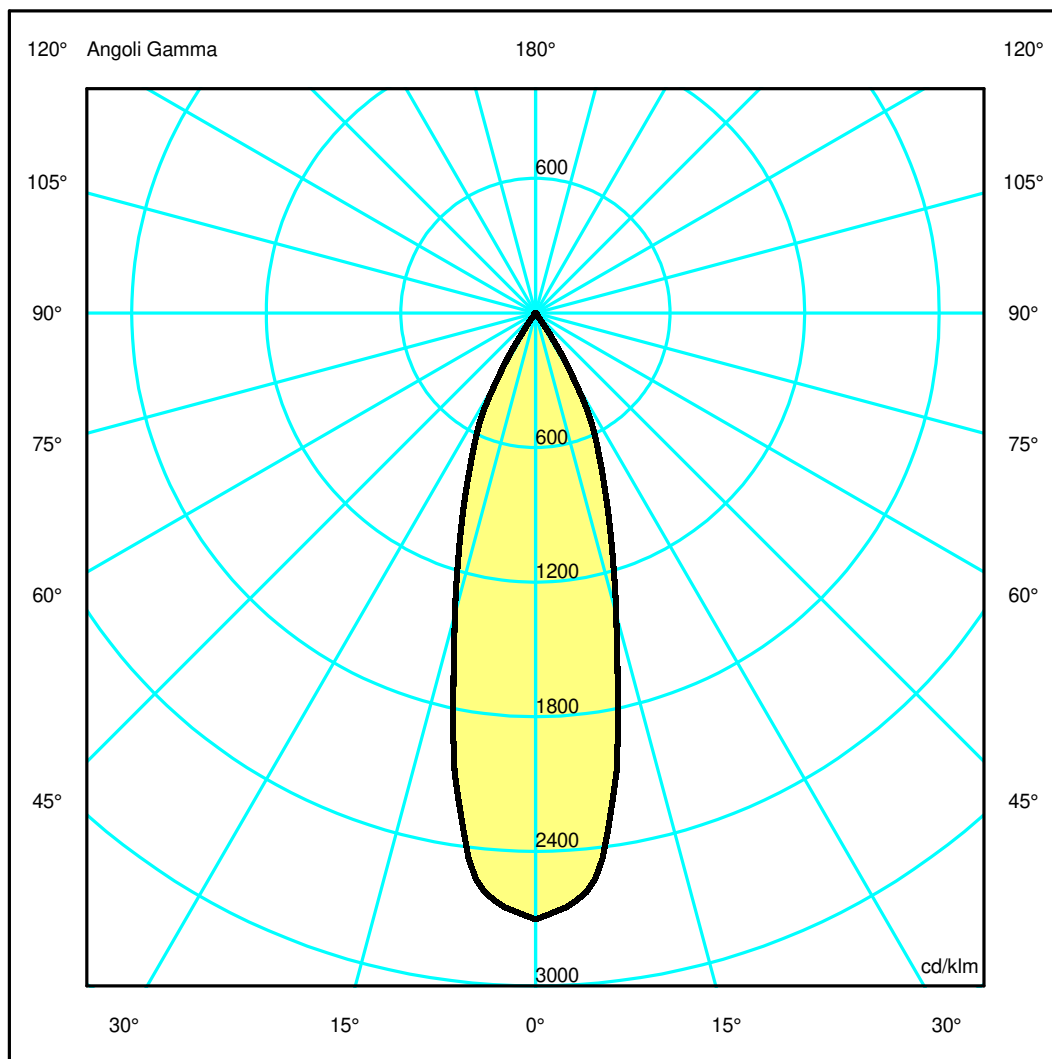

Luminaire

Code AB00409
Name Tagora 80 incasso New led Verde 4000K Flood

Measurem.


Code FTS2400226.
Name Tagora 80 incasso New led Verde 4000K Flood

Luminaire Flux	1290 lm	Luminaire Power	10.0 W	Efficacy	129.000 lm/W	Efficiency	100.00%
Source Flux	1290 lm	Maximum value	2701.94 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	154 mm		
Round Luminous Area		Diam.	70 mm	Height	0 mm		
Horizontal Luminous Area		0.003848 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000931 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1290 lm	
LED Flux=1777lm LED Power=10W Eff=73% EfcLed=178lm/W EfcLum=129lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.55	0.82	1.10	1.37	OC	0.27	0.55	0.82	1.10	1.37
OB	0.27	0.55	0.82	1.10	1.37	OD	0.27	0.55	0.82	1.10	1.37

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3485.50	3343.93	1790.97	834.17	90.35	13.44	9.89	6.03	2.91	0.94
OB	3485.50	3343.93	1790.97	834.17	90.35	13.44	9.89	6.03	2.91	0.94
OC	3485.50	3343.93	1790.97	834.17	90.35	13.44	9.89	6.03	2.91	0.94
OD	3485.50	3343.93	1790.97	834.17	90.35	13.44	9.89	6.03	2.91	0.94

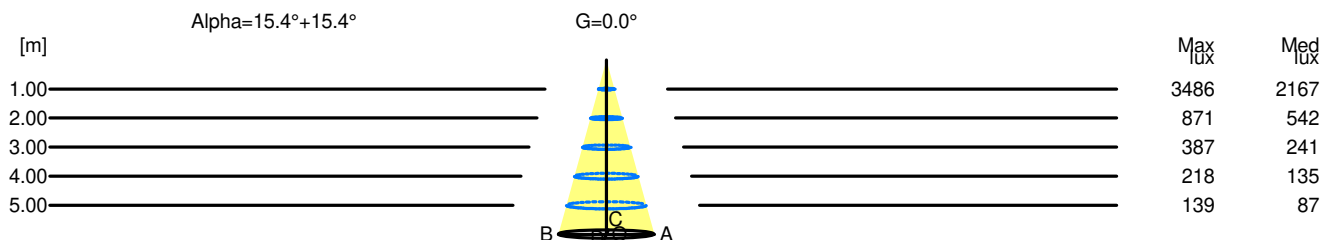

H[m]	D[m]	Max lux	Med lux	Alpha=15.4°+15.4°	G=0.0
1.00	0.55	3486	2167		
2.00	1.10	871	542		
3.00	1.65	387	241		
4.00	2.20	218	135		
5.00	2.75	139	87		