

Luminaire

Code AB00602
 Name Tagora 80 incasso New led Blu 4000K Very wide flood

Measurement

Code FTS2400228.
 Name Tagora 80 incasso New led Blu 4000K Very wide flood

| | | | | | | | |
|---|-------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1326 lm | Luminaire Power | 10.0 W | Efficacy | 132.600 lm/W | Efficiency | 100.00% |
| Source Flux | 1326 lm | Maximum value | 1539.43 cd/klm | Position | C=0.00 G=2.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 80 mm | Height | 154 mm | | |
| Round Luminous Area | | Diam. | 70 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.003848 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.000931 m2 |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 04-06-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1326 lm | |
| LED Flux=1777lm LED Power=10W Eff=75% EfcLed=178lm/W EfcLum=133lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h | | | | | | | |
| C.I.E. | 98 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |


Diam=80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

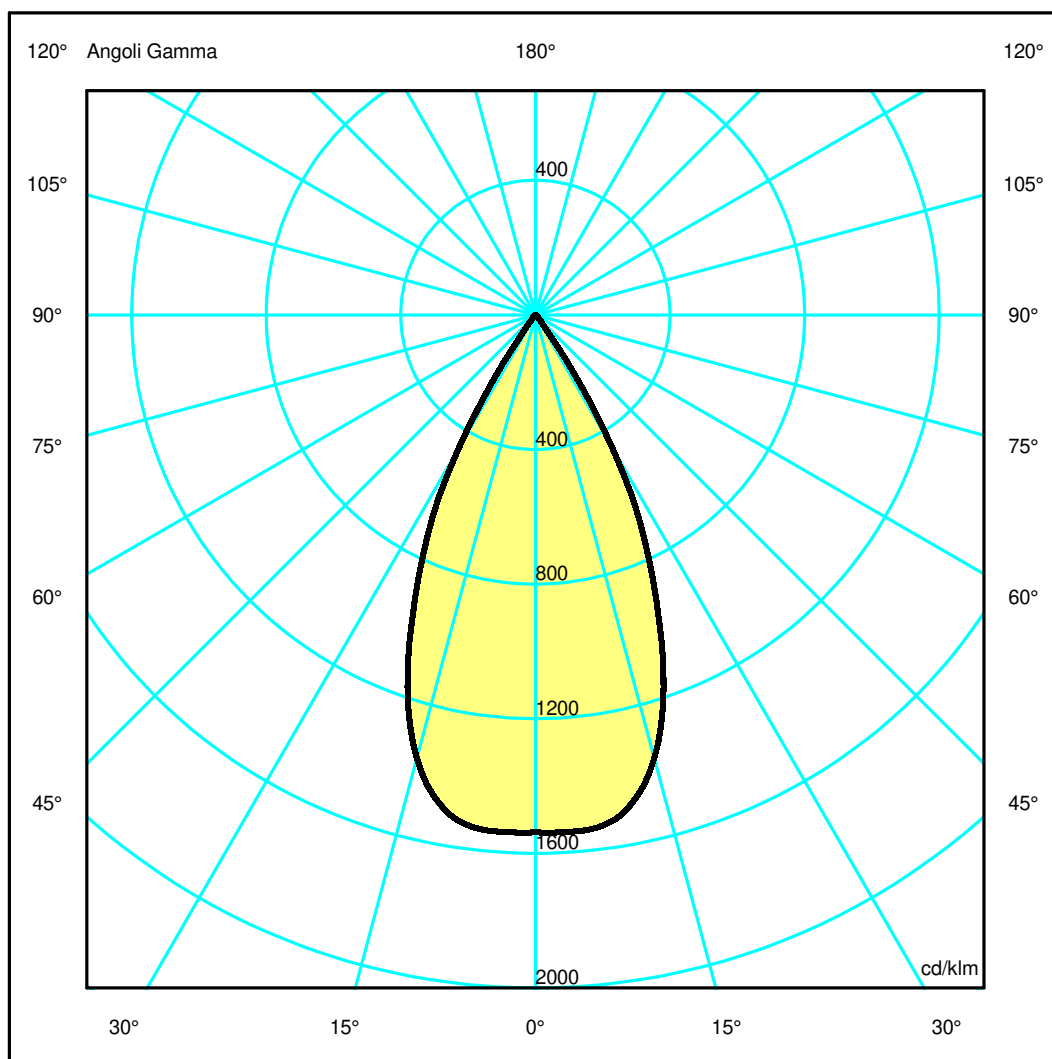

Luminaire

Code AB00602
Name Tagora 80 incasso New led Blu 4000K Very wide flood

Measurem.


Code FTS2400228.
Name Tagora 80 incasso New led Blu 4000K Very wide flood

| | | | | | | | |
|---|-------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1326 lm | Luminaire Power | 10.0 W | Efficacy | 132.600 lm/W | Efficiency | 100.00% |
| Source Flux | 1326 lm | Maximum value | 1539.43 cd/klm | Position | C=0.00 G=2.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 80 mm | Height | 154 mm | | |
| Round Luminous Area | | Diam. | 70 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.003848 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000931 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 04-06-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1326 lm | |
| LED Flux=1777lm LED Power=10W Eff=75% EfcLed=178lm/W EfcLum=133lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h | | | | | | | |
| C.I.E. | 98 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.48 | 0.95 | 1.43 | 1.90 | 2.38 | OC | 0.48 | 0.95 | 1.43 | 1.90 | 2.38 |
| OB | 0.48 | 0.95 | 1.43 | 1.90 | 2.38 | OD | 0.48 | 0.95 | 1.43 | 1.90 | 2.38 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|---------|--------|-------|-------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 2037.27 | 2040.77 | 1807.66 | 1053.44 | 148.42 | 16.49 | 10.21 | 6.12 | 2.97 | 0.98 |
| OB | 2037.27 | 2040.77 | 1807.66 | 1053.44 | 148.42 | 16.49 | 10.21 | 6.12 | 2.97 | 0.98 |
| OC | 2037.27 | 2040.77 | 1807.66 | 1053.44 | 148.42 | 16.49 | 10.21 | 6.12 | 2.97 | 0.98 |
| OD | 2037.27 | 2040.77 | 1807.66 | 1053.44 | 148.42 | 16.49 | 10.21 | 6.12 | 2.97 | 0.98 |

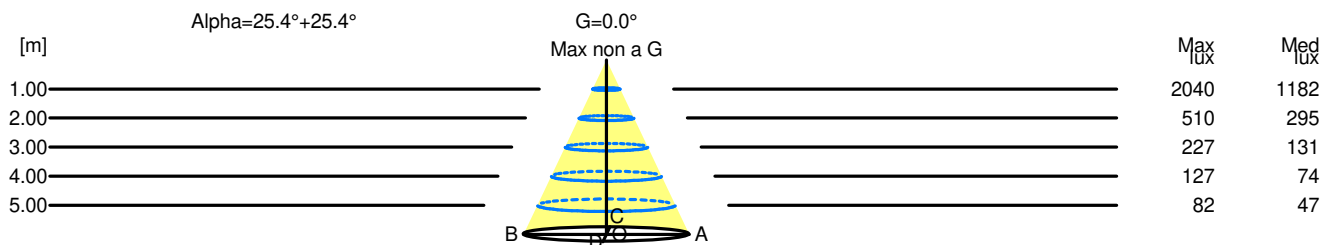

| H[m] | D[m] | Max lux | Med lux | Alpha=25.4°+25.4° | G=0.0 Max non a G |
|------|------|---------|---------|-------------------|-------------------|
| 1.00 | 0.95 | 2040 | 1182 | | |
| 2.00 | 1.90 | 510 | 295 | | |
| 3.00 | 2.85 | 227 | 131 | | |
| 4.00 | 3.80 | 127 | 74 | | |
| 5.00 | 4.75 | 82 | 47 | | |