

Luminaire

Code AB00609
Name Tagora 80 incasso New led Verde 4000K Very wide flood

Measurement

Code FTS2400228.
Name Tagora 80 incasso New led Verde 4000K Very wide flood

Luminaire Flux	1326 lm	Luminaire Power	10.0 W	Efficacy	132.600 lm/W	Efficiency	100.00%
Source Flux	1326 lm	Maximum value	1539.43 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	154 mm		
Round Luminous Area		Diam.	70 mm	Height	0 mm		
Horizontal Luminous Area			0.003848 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000931 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1326 lm	
LED Flux=1777lm LED Power=10W Eff=75% EfcLed=178lm/W EfcLum=133lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

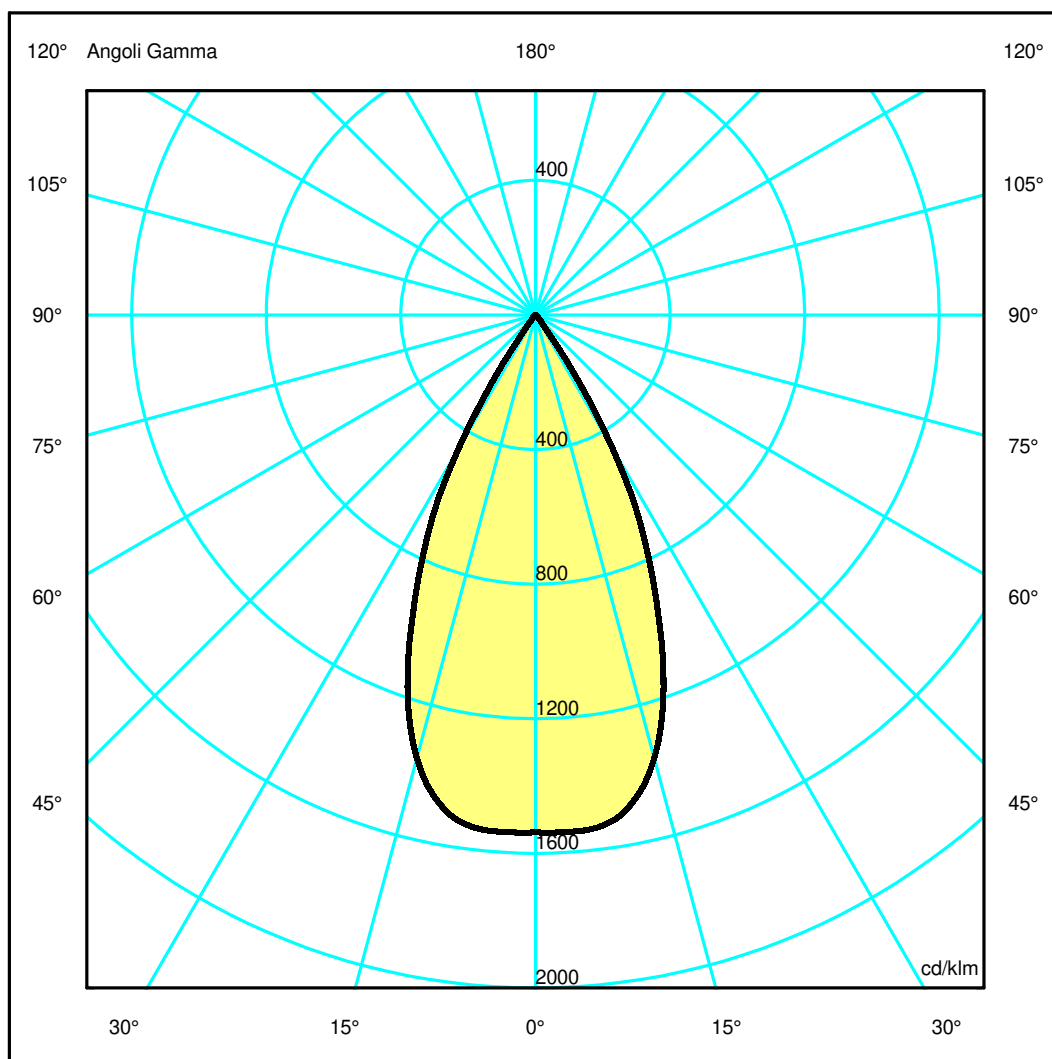

Luminaire

Code AB00609
Name Tagora 80 incasso New led Verde 4000K Very wide flood

Measurem.


Code FTS2400228.
Name Tagora 80 incasso New led Verde 4000K Very wide flood

Luminaire Flux	1326 lm	Luminaire Power	10.0 W	Efficacy	132.600 lm/W	Efficiency	100.00%
Source Flux	1326 lm	Maximum value	1539.43 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	154 mm		
Round Luminous Area		Diam.	70 mm	Height	0 mm		
Horizontal Luminous Area		0.003848 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000931 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1326 lm	
LED Flux=1777lm LED Power=10W Eff=75% EfcLed=178lm/W EfcLum=133lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.48	0.95	1.43	1.90	2.38	OC	0.48	0.95	1.43	1.90	2.38
OB	0.48	0.95	1.43	1.90	2.38	OD	0.48	0.95	1.43	1.90	2.38

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2037.27	2040.77	1807.66	1053.44	148.42	16.49	10.21	6.12	2.97	0.98
OB	2037.27	2040.77	1807.66	1053.44	148.42	16.49	10.21	6.12	2.97	0.98
OC	2037.27	2040.77	1807.66	1053.44	148.42	16.49	10.21	6.12	2.97	0.98
OD	2037.27	2040.77	1807.66	1053.44	148.42	16.49	10.21	6.12	2.97	0.98

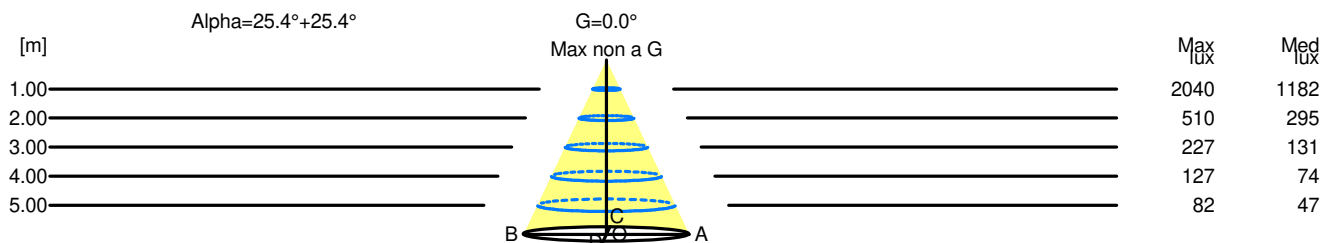

H[m]	D[m]	Max lux	Med lux	Alpha=25.4°+25.4°	G=0.0 Max non a G
1.00	0.95	2040	1182		
2.00	1.90	510	295		
3.00	2.85	227	131		
4.00	3.80	127	74		
5.00	4.75	82	47		