


Luminaire

Code AB04358
 Name Tagora 80 sospensione New led Dim Nero/Blu 3000K Very wide flood

Measurement

Code FTS1603672.
 Name Tagora 80 sospensione New led Dim Nero/Blu 3000K Very wide flood

Luminaire Flux	1247 lm	Luminaire Power	12.0 W	Efficacy	103.917 lm/W	Efficiency	100.00%
Source Flux	1247 lm	Maximum value	1539.43 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	330 mm		
Round Luminous Area		Diam.	70 mm	Height	0 mm		
Horizontal Luminous Area		0.003848 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000931 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-04-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1247 lm	
LED Flux=1670lm LED Power=10W Eff=75% EfcLed=167lm/W EfcLum=104lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

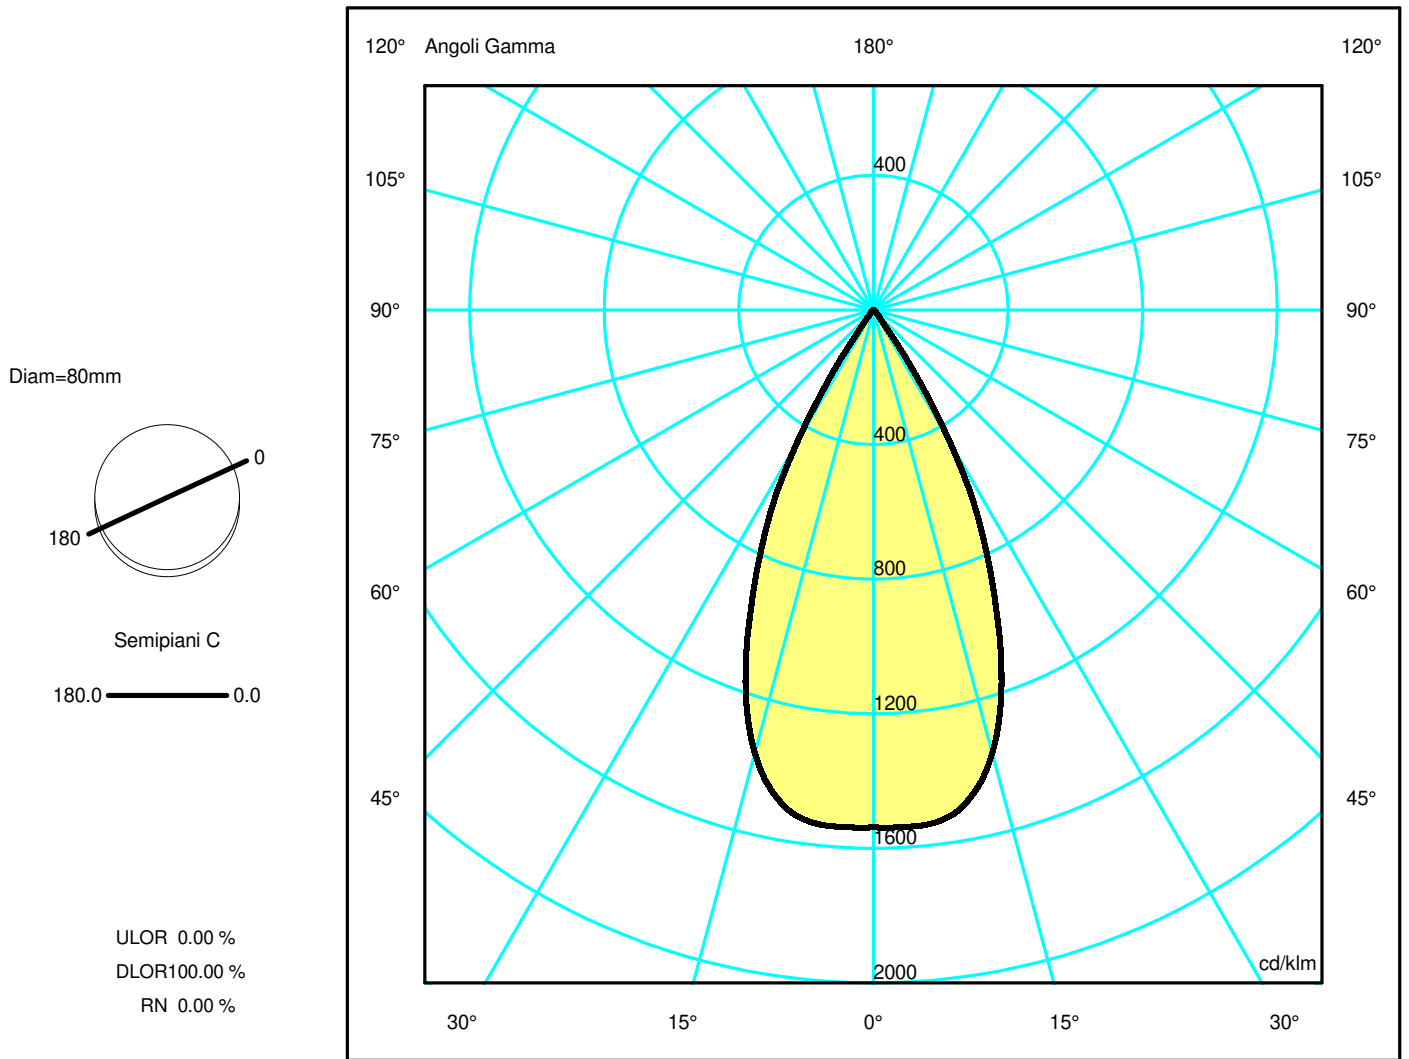

Luminaire

Code AB04358
Name Tagora 80 sospensione New led Dim Nero/Blu 3000K Very wide flood

Measurem.


Code FTS1603672.
Name Tagora 80 sospensione New led Dim Nero/Blu 3000K Very wide flood

Luminaire Flux	1247 lm	Luminaire Power	12.0 W	Efficacy	103.917 lm/W	Efficiency	100.00%
Source Flux	1247 lm	Maximum value	1539.43 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	330 mm		
Round Luminous Area		Diam.	70 mm	Height	0 mm		
Horizontal Luminous Area		0.003848 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000931 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-04-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1247 lm	
LED Flux=1670lm LED Power=10W Eff=75% EfcLed=167lm/W EfcLum=104lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.48	0.95	1.43	1.90	2.38	OC	0.48	0.95	1.43	1.90	2.38
OB	0.48	0.95	1.43	1.90	2.38	OD	0.48	0.95	1.43	1.90	2.38

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1915.89	1919.18	1699.97	990.68	139.57	15.51	9.60	5.76	2.79	0.92
OB	1915.89	1919.18	1699.97	990.68	139.57	15.51	9.60	5.76	2.79	0.92
OC	1915.89	1919.18	1699.97	990.68	139.57	15.51	9.60	5.76	2.79	0.92
OD	1915.89	1919.18	1699.97	990.68	139.57	15.51	9.60	5.76	2.79	0.92

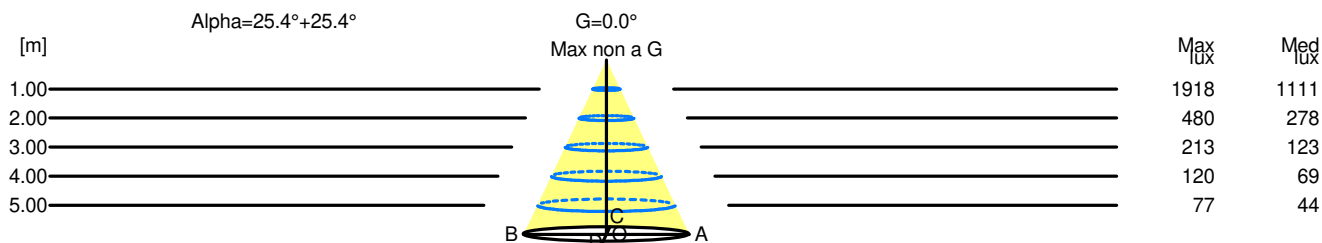

H[m]	D[m]	Max lux	Med lux	Alpha=25.4°+25.4°	G=0.0 Max non a G
1.00	0.95	1918	1111		
2.00	1.90	480	278		
3.00	2.85	213	123		
4.00	3.80	120	69		
5.00	4.75	77	44		