

## Luminaire

Code AE07200+AE40001  
 Name A. SHARPING 1184.DIR+IND 2X4 940 DM VERY WIDE FLOOD + SCREENS 1184 2X4 WHITE

## Measurement


Code FTS1603091  
 Name A. SHARPING 1184.DIR+IND 2X4 940 DM VERY WIDE FLOOD + SCREENS 1184 2X4 WHITE

Luminaire Flux	4301.26 lm	Luminaire Power	53.00 W	Efficacy	81.16 lm/W	Efficiency	100.00%
Lamps Flux	4301.26 lm	Maximum value	558.89 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002650 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4301.26 lm	


LED Flux=5695lm LED Power=44W Eff=76% EfcLed=129lm/W EfcLum=81lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 97 99 100 40 100  
 F UTE 0.40 A + 0.60 T

D DIN 5040 D62  
 B NBN BZ 1



ULOR 60.21 %  
 DLOR 39.79 %  
 RN 60.21 %

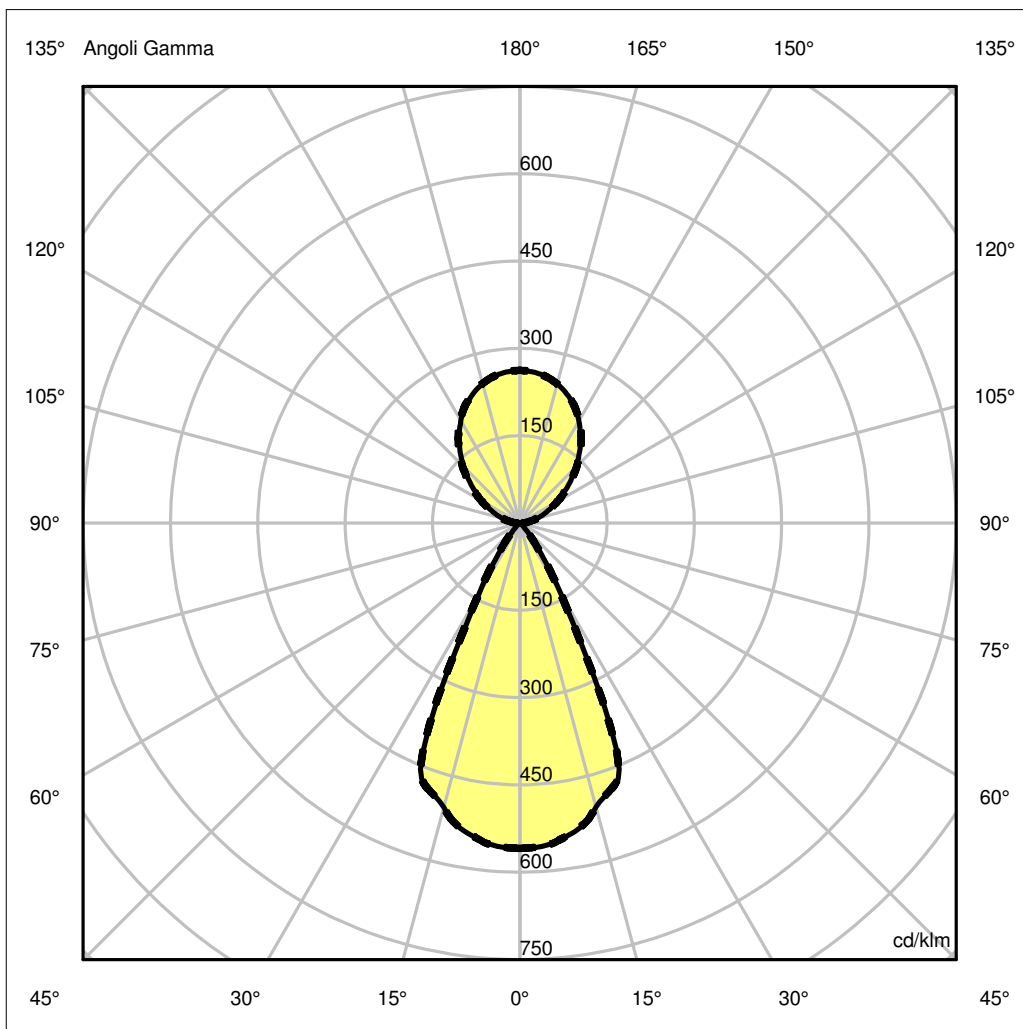

## Luminaire

Code AE07200+AE40001  
Name A. SHARPING 1184.DIR+IND 2X4 940 DM VERY WIDE FLOOD + SCREENS 1184 2X4 WHITE

## Measurerm.


Code FTS1603091  
Name A. SHARPING 1184.DIR+IND 2X4 940 DM VERY WIDE FLOOD + SCREENS 1184 2X4 WHITE

Luminaire Flux	4301.26 lm	Luminaire Power	53.00 W	Efficacy	81.16 lm/W	Efficiency	100.00%
Lamps Flux	4301.26 lm	Maximum value	558.89 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002650 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4301.26 lm	
LED Flux=5695lm LED Power=44W Eff=76% EfcLed=129lm/W EfcLum=81lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 40 100			D DIN 5040		D62	
F UTE	0.40 A + 0.60 T			B NBN		BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.45	OC	0.49	0.98	1.47	1.96	2.45
OB	0.49	0.98	1.47	1.96	2.45	OD	0.49	0.98	1.47	1.96	2.45

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69
OB	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69
OC	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69
OD	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69

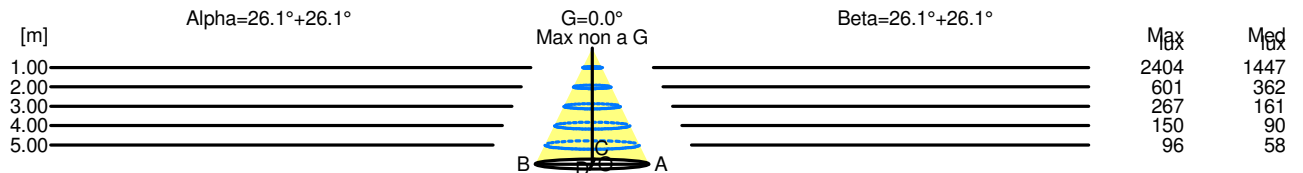

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	2404	1447		
2.00	1.96	601	362		
3.00	2.94	267	161		
4.00	3.91	150	90		
5.00	4.89	96	58		

H[m]	D[m]	Max lux	Med lux	Beta=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	2404	1447		
2.00	1.96	601	362		
3.00	2.94	267	161		
4.00	3.91	150	90		
5.00	4.89	96	58		