

## Luminaire

Code AF10505+AF95201

Name SHARP RECESSED TRIM 4X 12W 930 VERY WIDE FLOOD SILVER EXT.DRV + SCREEN 4X WHITE


## Measurerm.

Code FTS1603286

Name SHARP RECESSED TRIM 4X 12W 930 VERY WIDE FLOOD SILVER EXT.DRV + SCREEN 4X WHITE

Luminaire Flux	778.90 lm	Luminaire Power	11.01 W	Efficacy	70.74 lm/W	Efficiency	100.00%
Lamps Flux	778.90 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	148 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.005476 m2			Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			0.001325 m2
Coordinate system	CG			Symmetry Type			Rotosymmetrical
Date	17-07-2017			Maximum Gamma Angle			180
Measurement Distance	0.00			Measurement Flux			778.90 lm
LED Flux=1061,32lm LED Power=11W Eff=73% EfcLed=96lm/W EfcLum=71lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		


150mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

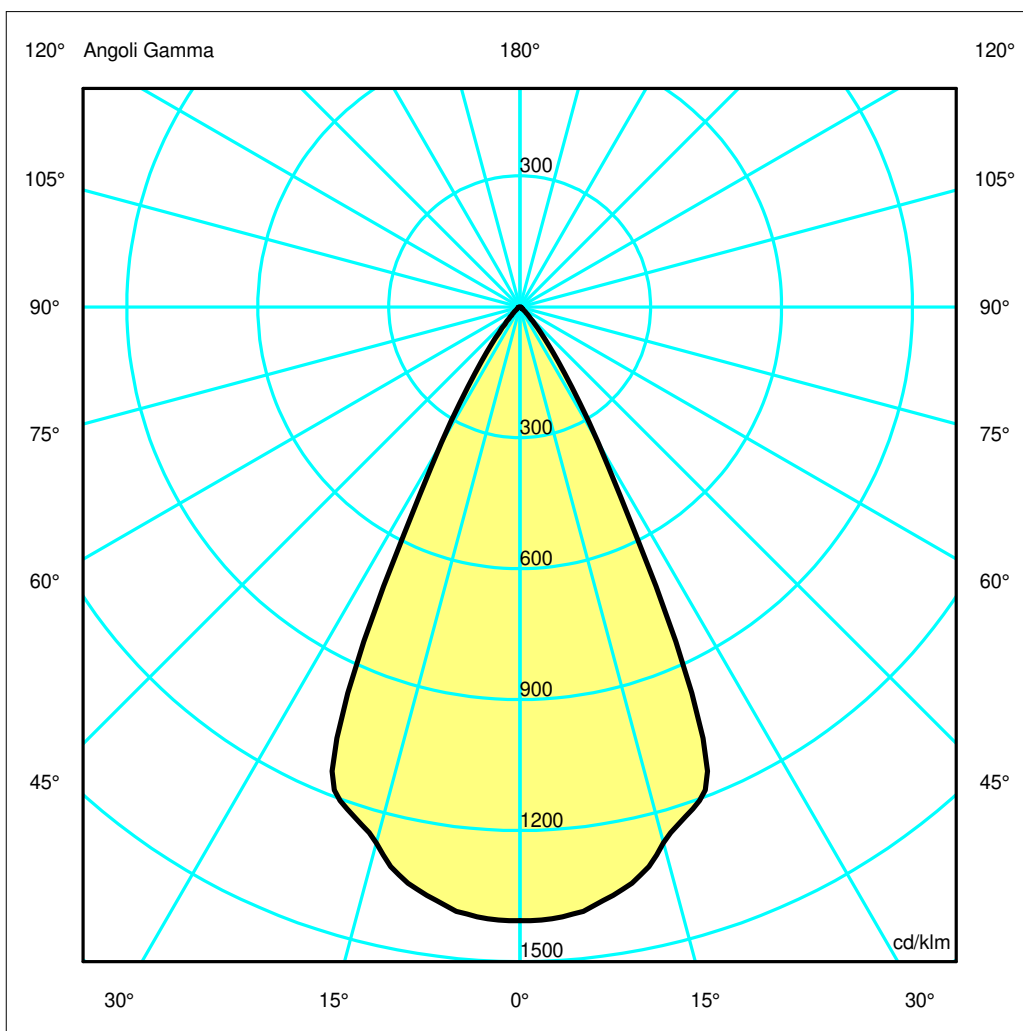

## Luminaire

Code AF10505+AF95201  
 Name SHARP RECESSED TRIM 4X 12W 930 VERY WIDE FLOOD SILVER EXT.DRV + SCREEN 4X WHITE

## Measurement

Code FTS1603286  
 Name SHARP RECESSED TRIM 4X 12W 930 VERY WIDE FLOOD SILVER EXT.DRV + SCREEN 4X WHITE


Luminaire Flux	778.90 lm	Luminaire Power	11.01 W	Efficacy	70.74 lm/W	Efficiency	100.00%
Lamps Flux	778.90 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	148 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.005476 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001325 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		778.90 lm	
LED Flux=1061,32lm LED Power=11W Eff=73% EfcLed=96lm/W EfcLum=71lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.45	OC	0.49	0.98	1.47	1.96	2.45
OB	0.49	0.98	1.47	1.96	2.45	OD	0.49	0.98	1.47	1.96	2.45

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	1095.40	1087.58	990.00	659.04	120.77	20.99	4.92	3.14	2.06	0.77
OB	1095.40	1087.58	990.00	659.04	120.77	20.99	4.92	3.14	2.06	0.77
OC	1095.40	1087.58	990.00	659.04	120.77	20.99	4.92	3.14	2.06	0.77
OD	1095.40	1087.58	990.00	659.04	120.77	20.99	4.92	3.14	2.06	0.77

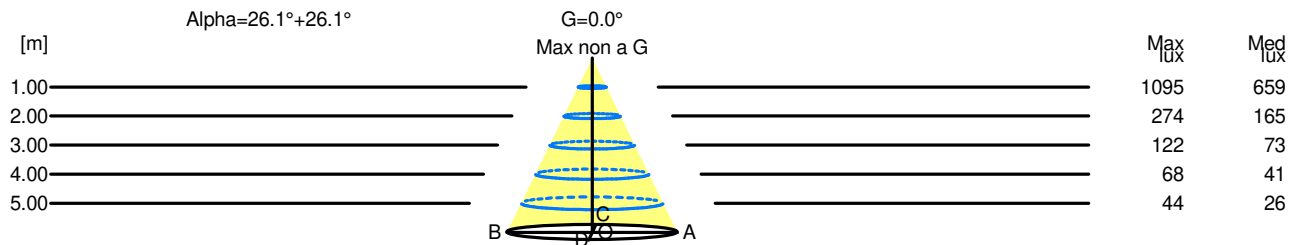

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	1095	659		
2.00	1.96	274	165		
3.00	2.94	122	73		
4.00	3.91	68	41		
5.00	4.89	44	26		