


Luminaire

Code AF15204+AF95204
 Name SHARP RECESSED TRIM 8X 24W 930 VERY WIDE FLOOD BLACK EXT.DRV + SCREEN 4X BLACK

Measurerm.

Code FTS1901988
 Name SHARP RECESSED TRIM 8X 24W 930 VERY WIDE FLOOD BLACK EXT.DRV + SCREEN 4X BLACK

| | | | | | | | |
|--|------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1520.66 lm | Luminaire Power | 22.00 W | Efficacy | 69.12 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1520.66 lm | Maximum value | 1430.97 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 298 mm | Width | 40 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 296 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.010952 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.002650 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 17-07-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1520.66 lm | |
| LED Flux=2122,64lm LED Power=22W Eff=72% EfcLed=96lm/W EfcLum=69lm/W Ra=90 SDCM=2 L90(20K)=118000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | D DIN 5040 | A60 | |
| F UTE | -- | | | | B NBN | BZ 1 | |

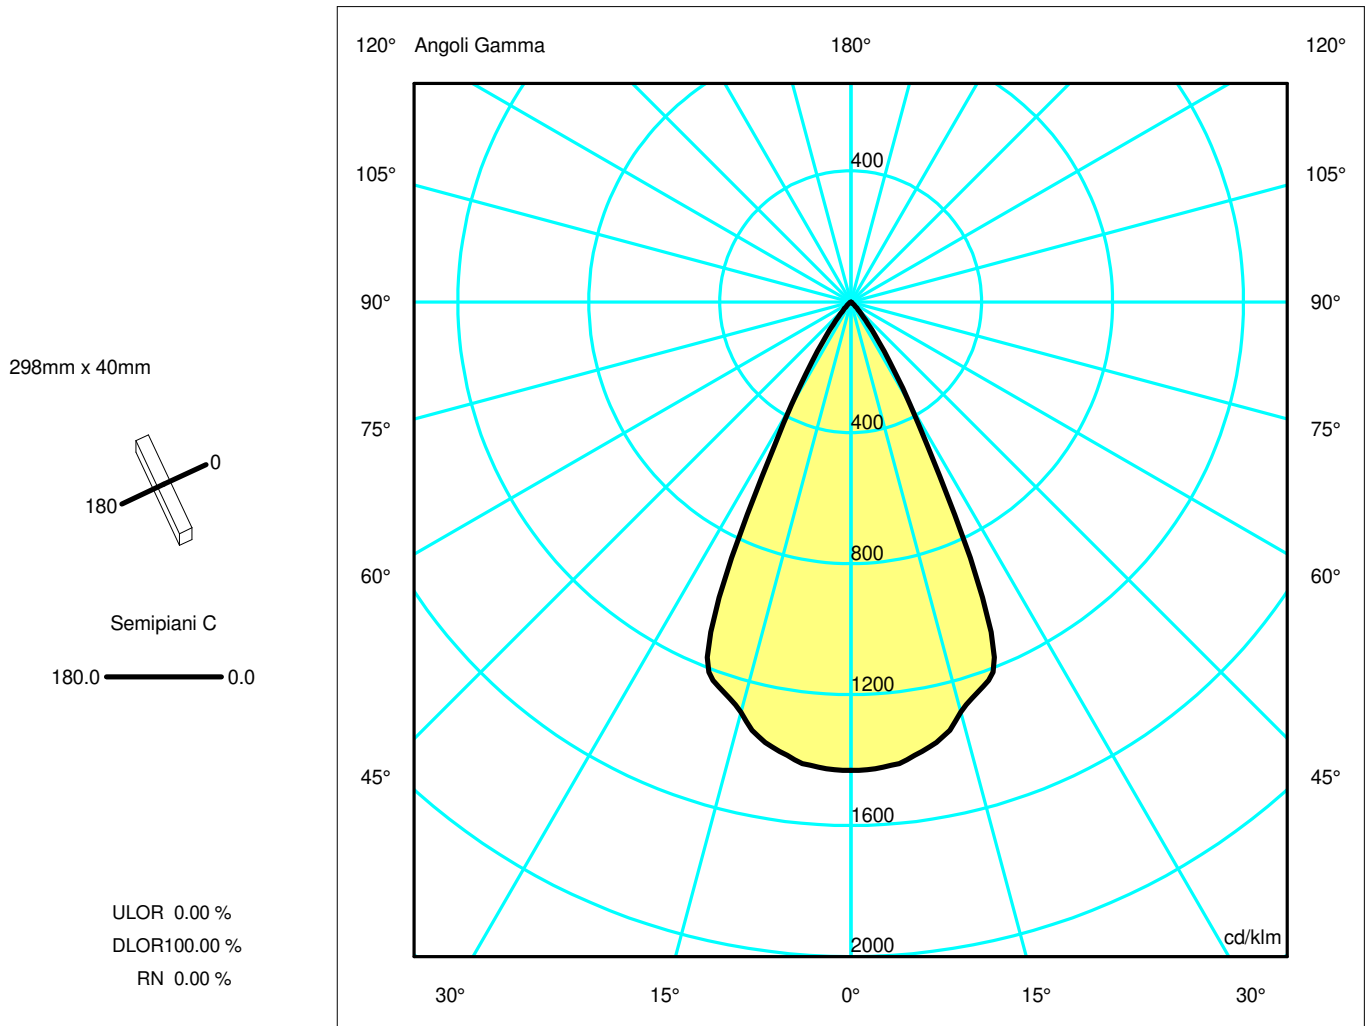

Luminaire

Code AF15204+AF95204
 Name SHARP RECESSED TRIM 8X 24W 930 VERY WIDE FLOOD BLACK EXT.DRV + SCREEN 4X BLACK

Measur.

Code FTS1901988
 Name SHARP RECESSED TRIM 8X 24W 930 VERY WIDE FLOOD BLACK EXT.DRV + SCREEN 4X BLACK


| | | | | | | | |
|--|------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1520.66 lm | Luminaire Power | 22.00 W | Efficacy | 69.12 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1520.66 lm | Maximum value | 1430.97 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 298 mm | Width | 40 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 296 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.010952 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.002650 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 17-07-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1520.66 lm | |
| LED Flux=2122,64lm LED Power=22W Eff=72% EfcLed=96lm/W EfcLum=69lm/W Ra=90 SDCM=2 L90(20K)=118000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 | OC | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 |
| OB | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 | OD | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 |

Luminous Intensities [cd/klm]

| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
|----|---------|---------|---------|---------|--------|-------|------|------|------|------|
| OA | 2176.01 | 2160.37 | 1972.56 | 1312.08 | 232.32 | 33.89 | 2.64 | 0.00 | 0.00 | 0.00 |
| OB | 2176.01 | 2160.37 | 1972.56 | 1312.08 | 232.32 | 33.89 | 2.64 | 0.00 | 0.00 | 0.00 |
| OC | 2176.01 | 2160.37 | 1972.56 | 1312.08 | 232.32 | 33.89 | 2.64 | 0.00 | 0.00 | 0.00 |
| OD | 2176.01 | 2160.37 | 1972.56 | 1312.08 | 232.32 | 33.89 | 2.64 | 0.00 | 0.00 | 0.00 |

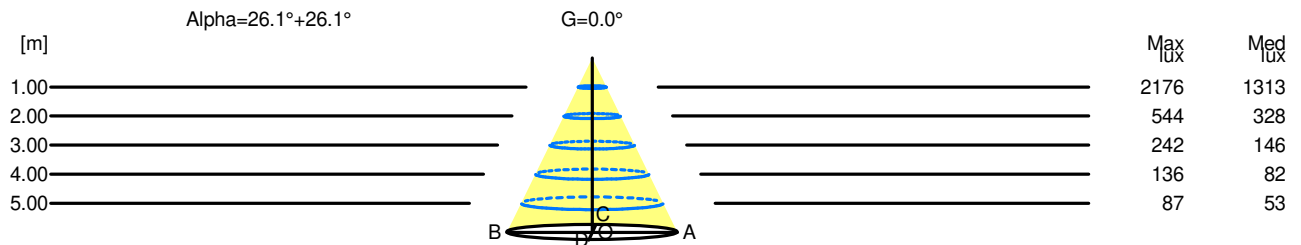

| H[m] | D[m] | Max lux | Med lux | Alpha=26.1°+26.1° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.98 | 2176 | 1313 | | |
| 2.00 | 1.96 | 544 | 328 | | |
| 3.00 | 2.93 | 242 | 146 | | |
| 4.00 | 3.91 | 136 | 82 | | |
| 5.00 | 4.89 | 87 | 53 | | |