

Luminaire


Code AF45805+AF95201
 Name SHARP SMD.8X 22W 927 WF ND SIL+ SCREEN 4X WHITE

Measurement

Code FTS1902134-A
 Name SHARP SMD.8X 22W 927 WF ND SIL+ SCREEN 4X WHITE

| | | | | | | | |
|--|-------------------|-------------------------|----------------|-----------------------------|---------------|-------------------------|-----------------|
| Luminaire Flux | 1503 lm | Luminaire Power | 24.0 W | Efficacy | 62.625 lm/W | Efficiency | 100.00% |
| Source Flux | 1503 lm | Maximum value | 2570.73 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 300 mm | Width | 45 mm | Height | 85 mm |
| Rectangular Luminous Area | | Length | 296 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.010952 m ² | | Emitting area on Plane 180° | | 0.000000 m ² | |
| Emitting area on Plane 0° | | 0.000000 m ² | | Emitting area on Plane 270° | | 0.000000 m ² | |
| Emitting area on Plane 90° | | 0.000000 m ² | | Glare area at 76° | | 0.002650 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 25-11-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1503 lm | |
| LED Flux=2121lm LED Power=22W Eff=71% EfcLed=96lm/W EfcLum=63lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h | | | | | | | |
| C.I.E. | 97 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |


300mm x 45mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

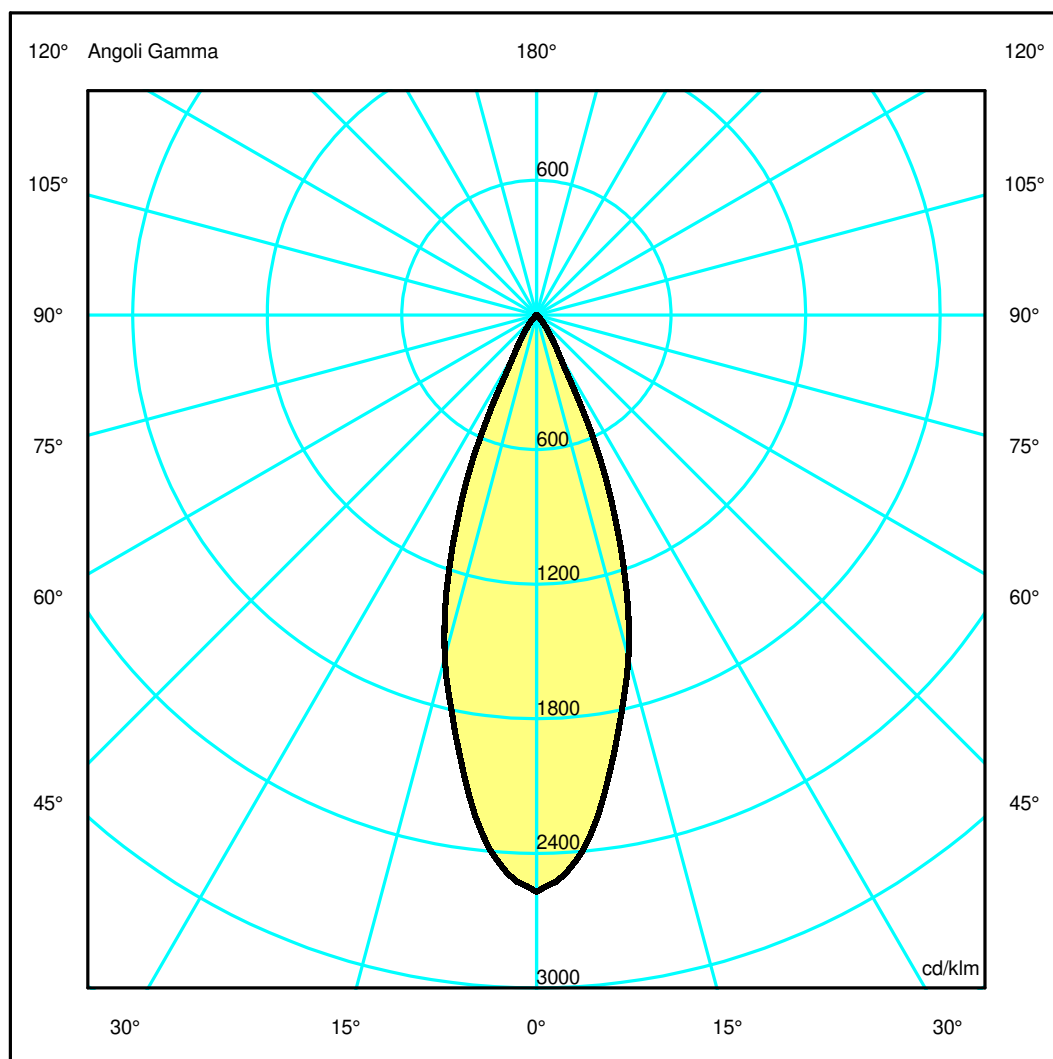

Luminaire

Code AF45805+AF95201
Name SHARP SMD.8X 22W 927 WF ND SIL+ SCREEN 4X WHITE

Measurerm.


Code FTS1902134-A
Name SHARP SMD.8X 22W 927 WF ND SIL+ SCREEN 4X WHITE

| | | | | | | | |
|--|-------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1503 lm | Luminaire Power | 24.0 W | Efficacy | 62.625 lm/W | Efficiency | 100.00% |
| Source Flux | 1503 lm | Maximum value | 2570.73 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 300 mm | Width | 45 mm | Height | 85 mm |
| Rectangular Luminous Area | | Length | 296 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.010952 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.002650 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 25-11-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1503 lm | |
| LED Flux=2121lm LED Power=22W Eff=71% EfcLed=96lm/W EfcLum=63lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h | | | | | | | |
| C.I.E. | 97 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.33 | 0.66 | 0.98 | 1.31 | 1.64 | OC | 0.33 | 0.66 | 0.98 | 1.31 | 1.64 |
| OB | 0.33 | 0.66 | 0.98 | 1.31 | 1.64 | OD | 0.33 | 0.66 | 0.98 | 1.31 | 1.64 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|--------|--------|-------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 3863.84 | 3594.09 | 2377.27 | 854.97 | 150.87 | 35.59 | 9.24 | 4.99 | 3.23 | 1.26 |
| OB | 3863.84 | 3594.09 | 2377.27 | 854.97 | 150.87 | 35.59 | 9.24 | 4.99 | 3.23 | 1.26 |
| OC | 3863.84 | 3594.09 | 2377.27 | 854.97 | 150.87 | 35.59 | 9.24 | 4.99 | 3.23 | 1.26 |
| OD | 3863.84 | 3594.09 | 2377.27 | 854.97 | 150.87 | 35.59 | 9.24 | 4.99 | 3.23 | 1.26 |

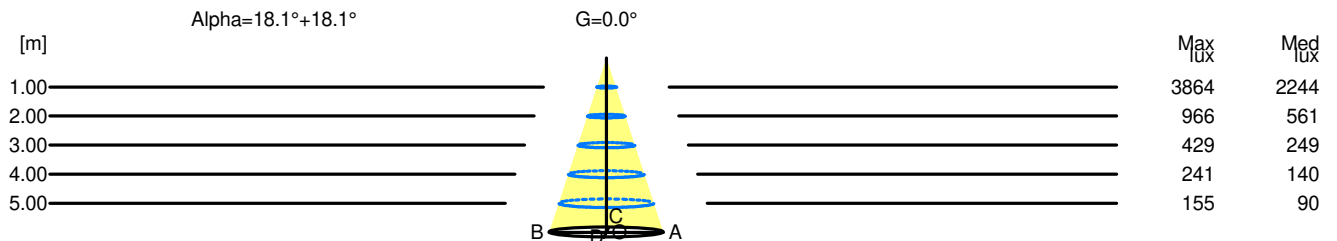

| H[m] | D[m] | Max lux | Med lux | Alpha=18.1°+18.1° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.66 | 3864 | 2244 | | |
| 2.00 | 1.31 | 966 | 561 | | |
| 3.00 | 1.97 | 429 | 249 | | |
| 4.00 | 2.62 | 241 | 140 | | |
| 5.00 | 3.28 | 155 | 90 | | |