

Luminaire


Code AF50300+AF95001
 Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X WHITE

Measurem.

Code FTS1603356
 Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X WHITE

| | | | | | | | |
|--|-----------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 200.96 lm | Luminaire Power | 3.00 W | Efficacy | 66.99 lm/W | Efficiency | 100.00% |
| Lamps Flux | 200.96 lm | Maximum value | 5541.55 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 40 mm | Width | 40 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 37 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.001369 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000331 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 21-02-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 200.96 lm | |
| LED Flux=265,33lm LED Power=3W Eff=76% EfcLed=88lm/W EfcLum=67lm/W Ra=90 SDCM=2 L90(20K)=118000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | D DIN 5040 | A60 | |
| F UTE | -- | | | | B NBN | BZ 1 | |


40mm x 40mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

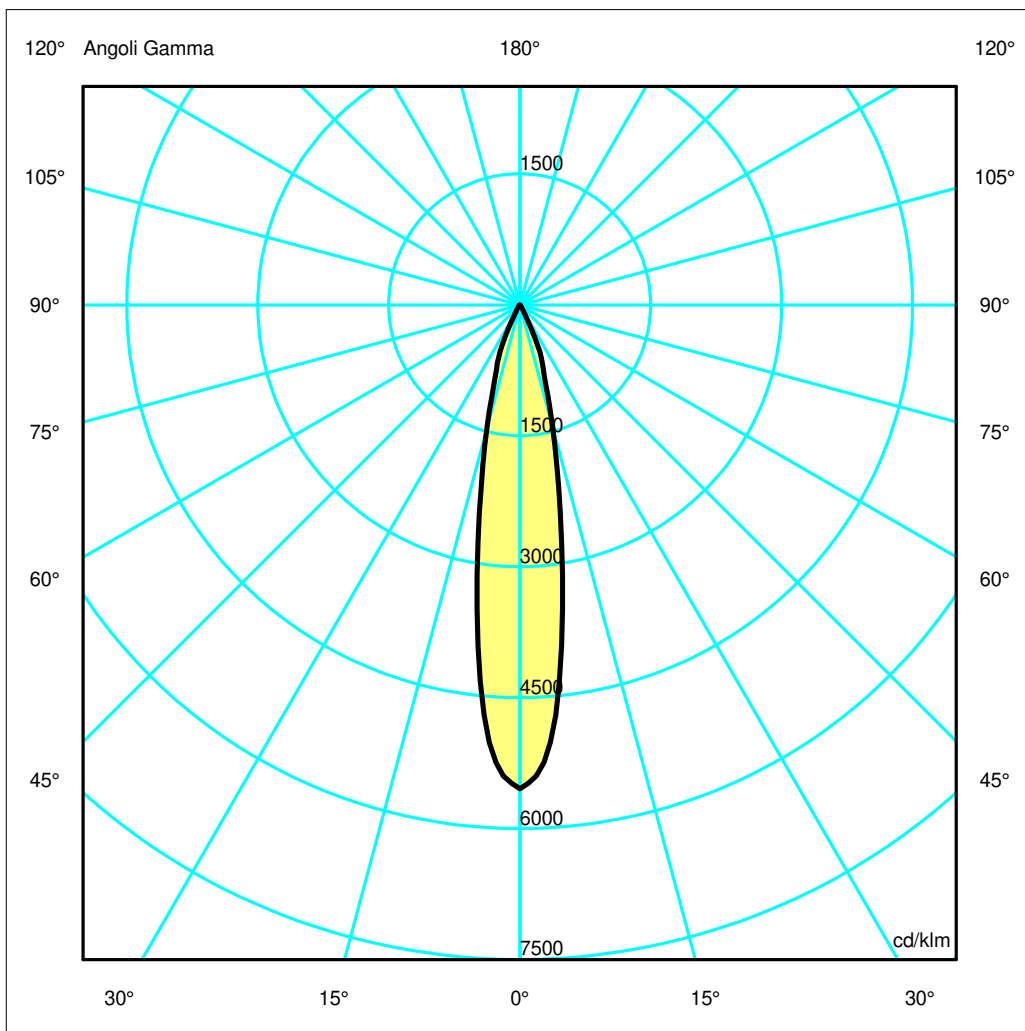

Luminaire

Code AF50300+AF95001
Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X WHITE

Measurerm.


Code FTS1603356
Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X WHITE

| | | | | | | | |
|--|--------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 200.96 lm | Luminaire Power | 3.00 W | Efficacy | 66.99 lm/W | Efficiency | 100.00% |
| Lamps Flux | 200.96 lm | Maximum value | 5541.55 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 40 mm | Width | 40 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 37 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.001369 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000331 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 21-02-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 200.96 lm | |
| LED Flux=265,33lm LED Power=3W Eff=76% EfcLed=88lm/W EfcLum=67lm/W Ra=90 SDCM=2 L90(20K)=118000h | | | | | | | |
| C.I.E. | 99 100 100 100 100 | | | D DIN 5040 | | A60 | |
| F UTE | -- | | | B NBN | | BZ 1 | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 | OC | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 |
| OB | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 | OD | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|--------------------------------|--------|--------|-------|------|------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1113.63 | 947.70 | 292.38 | 79.94 | 5.02 | 1.42 | 0.49 | 0.32 | 0.22 | 0.11 |
| OB | 1113.63 | 947.70 | 292.38 | 79.94 | 5.02 | 1.42 | 0.49 | 0.32 | 0.22 | 0.11 |
| OC | 1113.63 | 947.70 | 292.38 | 79.94 | 5.02 | 1.42 | 0.49 | 0.32 | 0.22 | 0.11 |
| OD | 1113.63 | 947.70 | 292.38 | 79.94 | 5.02 | 1.42 | 0.49 | 0.32 | 0.22 | 0.11 |

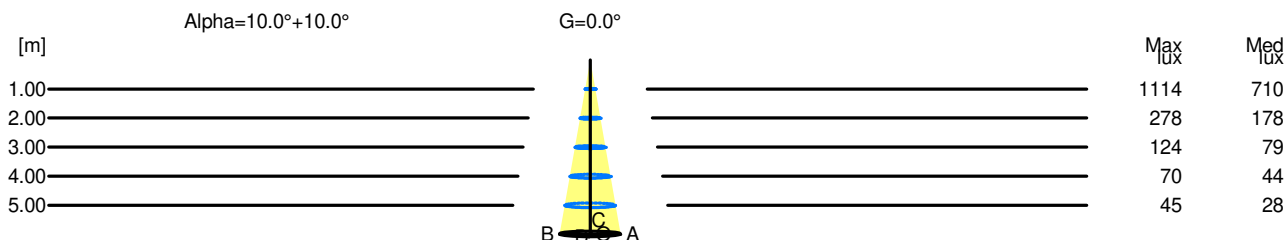

| H[m] | D[m] | Max lux | Med lux | Alpha=10.0°+10.0° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.35 | 1114 | 710 | | |
| 2.00 | 0.70 | 278 | 178 | | |
| 3.00 | 1.05 | 124 | 79 | | |
| 4.00 | 1.41 | 70 | 44 | | |
| 5.00 | 1.76 | 45 | 28 | | |