

Luminaire

Code AF50300+AF95004+AF0600
 Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X BLACK + GRAZER LENS

Measurem.

Code FTS1901411
 Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X BLACK + GRAZER LENS


Luminaire Flux	165.99 lm	Luminaire Power	3.00 W	Efficacy	55.33 lm/W	Efficiency	100.00%
Lamps Flux	165.99 lm	Maximum value	1615.43 cd/klm	Position	C=90.00 G=23.00	CG	Double Symmetrical
Rectangular Luminaire		Length	40 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	37 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.001369 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000331 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		19-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		165.99 lm	

LED Flux=265.33lm LED Power=3W Eff=63% EfcLed=88lm/W EfcLum=55lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 95 100 100 100 100
 F UTE 1.00 A

D DIN 5040
 B NBN

A60
 BZ 1

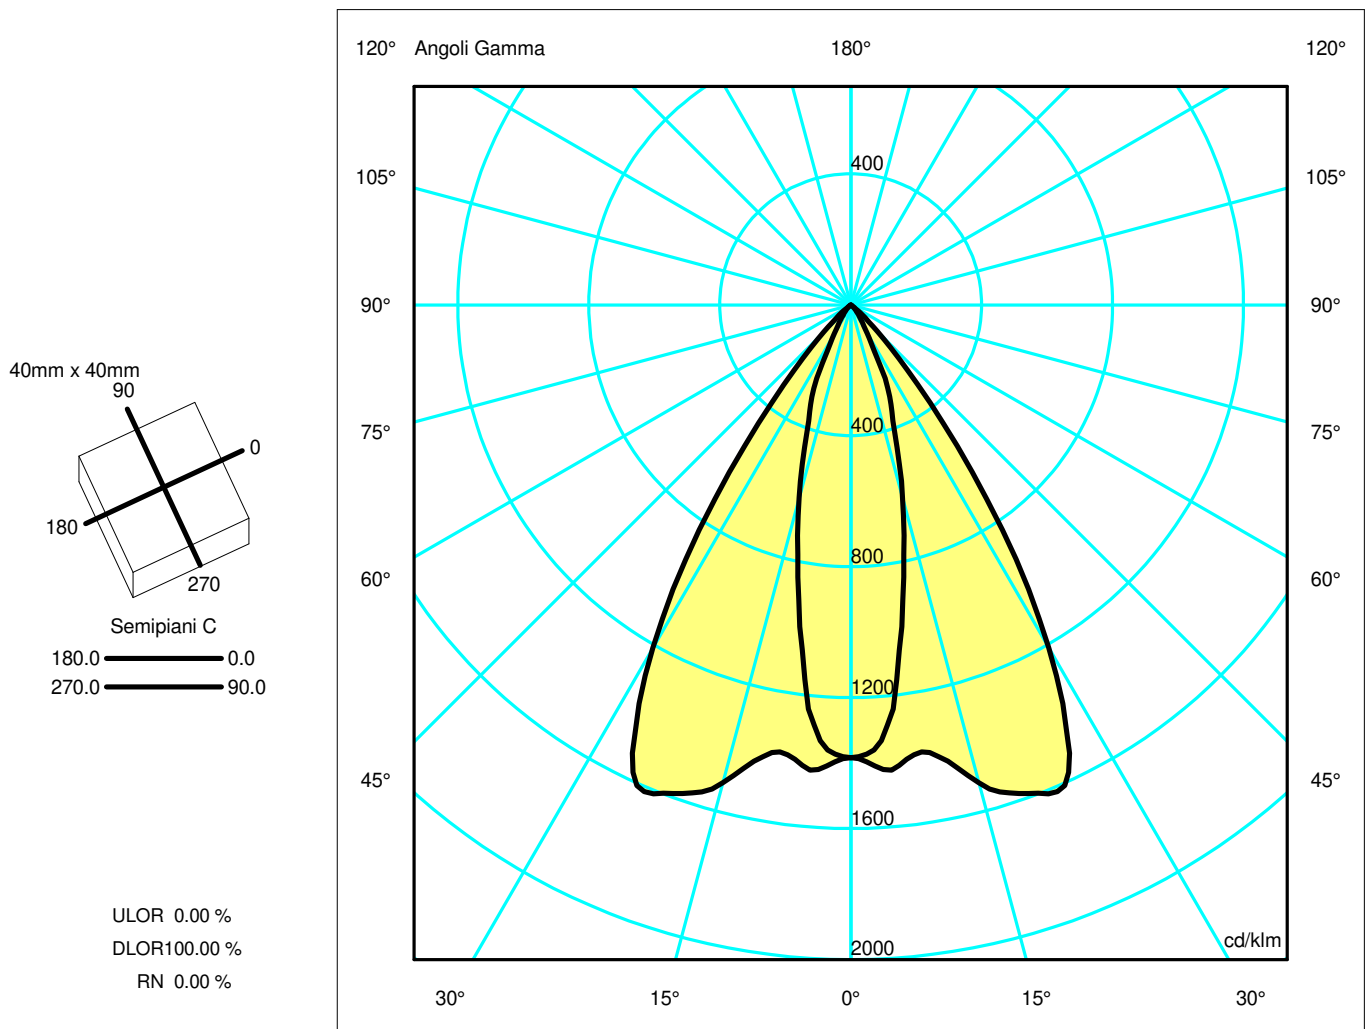

Luminaire

Code AF50300+AF95004+AF0600

Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X BLACK + GRAZER LENS

Measurerm.

Code FTS1901411


Name SHARP RECESSED TRIMLESS 1X 3W 930 FLOOD EXT.DRV + SCREEN 1X BLACK + GRAZER LENS

Luminaire Flux	165.99 lm	Luminaire Power	3.00 W	Efficacy	55.33 lm/W	Efficiency	100.00%
Lamps Flux	165.99 lm	Maximum value	1615.43 cd/klm	Position	C=90.00 G=23.00	CG	Double Symmetrical
Rectangular Luminaire		Length	40 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	37 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.001369 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000331 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		19-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		165.99 lm	
LED Flux=265.33lm LED Power=3W Eff=63% EfcLed=88lm/W EfcLum=55lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.48	0.72	0.96	1.20	OC	0.71	1.42	2.13	2.84	3.55
OB	0.24	0.48	0.72	0.96	1.20	OD	0.71	1.42	2.13	2.84	3.55

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	229.57	213.84	101.26	41.06	8.53	2.72	0.33	0.03	0.00	0.00
OB	229.57	213.84	101.26	41.06	8.53	2.72	0.33	0.03	0.00	0.00
OC	229.57	236.73	250.74	261.46	120.21	19.45	0.95	0.03	0.00	0.00
OD	229.57	236.73	250.74	261.46	120.21	19.45	0.95	0.03	0.00	0.00

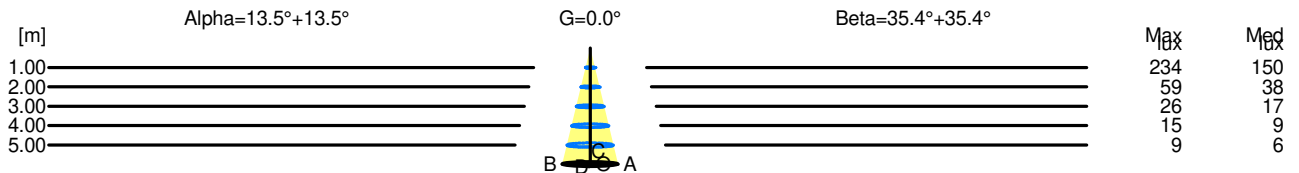

H[m]	D[m]	Max lux	Med lux	Alpha=13.5°+13.5°	G=0.0
1.00	0.48	234	150		
2.00	0.96	59	38		
3.00	1.44	26	17		
4.00	1.93	15	9		
5.00	2.41	9	6		

H[m]	D[m]	Max lux	Med lux	Beta=35.4°+35.4°	G=0.0
1.00	1.42	234	150		
2.00	2.84	59	38		
3.00	4.26	26	17		
4.00	5.68	15	9		
5.00	7.09	9	6		