


Luminaire

Code AF61101
Name SHARP.RCS.TLESS.4X 11W 940 WW RIFL.BCO

Measurerm.

Code FTS2000122
Name SHARP.RCS.TLESS.4X 11W 940 WW RIFL.BCO

Luminaire Flux	757.02 lm	Luminaire Power	11.00 W	Efficacy	68.82 lm/W	Efficiency	100.00%
Lamps Flux	757.02 lm	Maximum value	1037.05 cd/klm	Position	C=170.00 G=9.00	CG	Sym. on planes 0-180
Rectangular Luminaire	Length	155 mm	Width	45 mm	Height	85 mm	
Rectangular Luminous Area	Length	145 mm	Width	32 mm	Height	0 mm	
Horizontal Luminous Area	0.004640 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001123 m2
Coordinate system	CG	Symmetry Type	Sym. on planes 0-180	Date	23-10-2019	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	757.02 lm	LED Flux=1169.7lm LED Power=11W Eff=65% EfcLed=106lm/W EfcLum=69lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h			
C.I.E.	70 90 97 100 100	D DIN 5040	A50				
F UTE	1.00 C	B NBN	BZ 2				

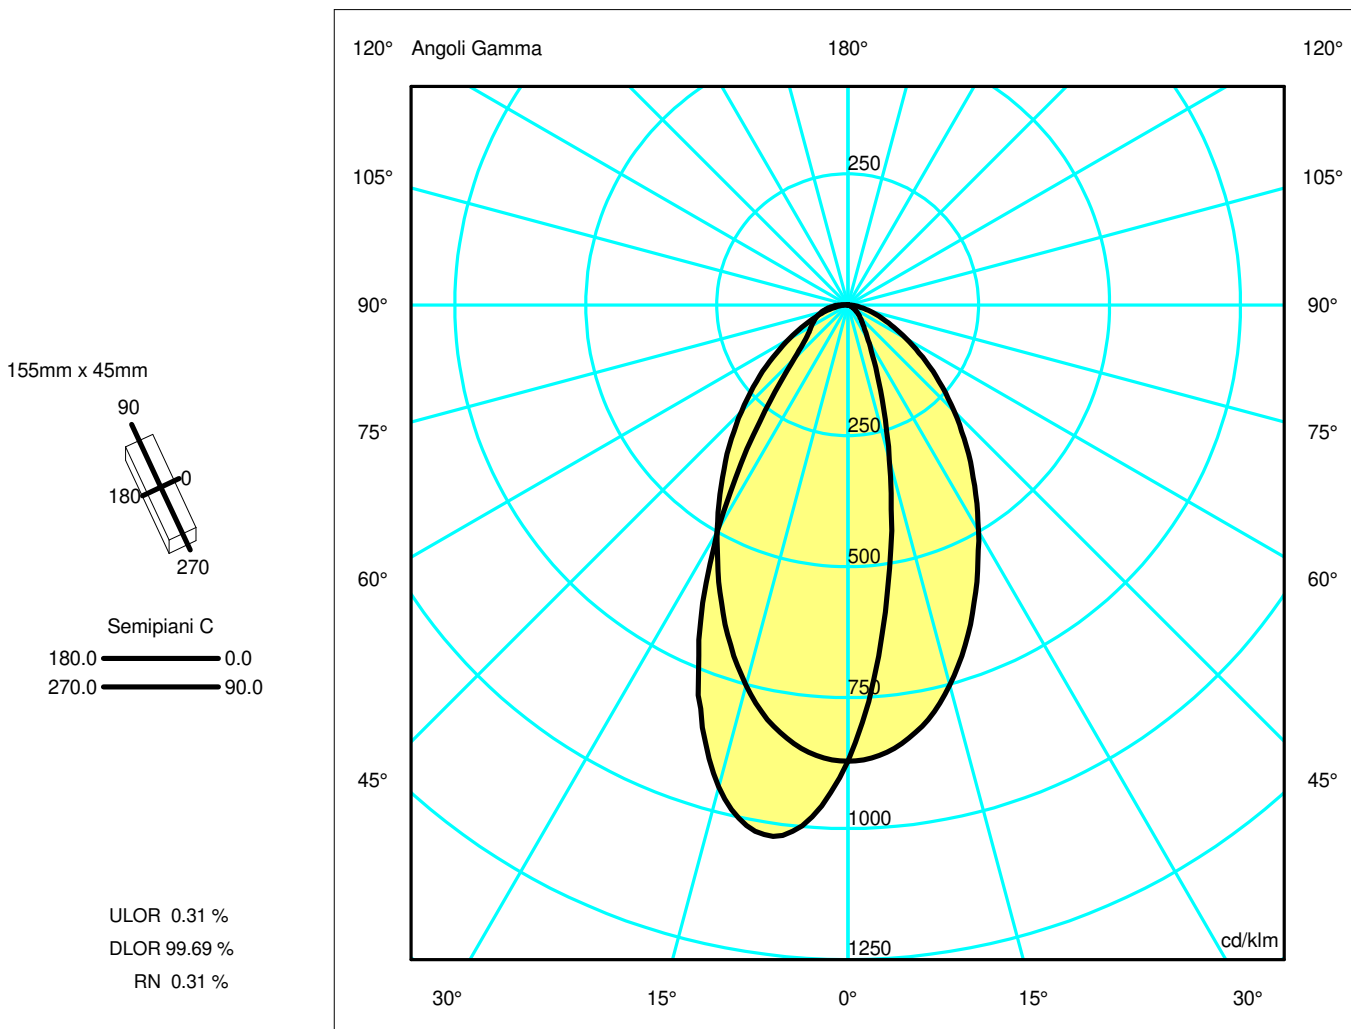

Luminaire

Code AF61101
Name SHARP.RCS.TLESS.4X 11W 940 WW RIFL.BCO

Measurment.


Code FTS2000122
Name SHARP.RCS.TLESS.4X 11W 940 WW RIFL.BCO

Luminaire Flux	757.02 lm	Luminaire Power	11.00 W	Efficacy	68.82 lm/W	Efficiency	100.00%
Lamps Flux	757.02 lm	Maximum value	1037.05 cd/klm	Position	C=170.00 G=9.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	155 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	145 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.004640 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001123 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		23-10-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		757.02 lm	
LED Flux=1169.7lm LED Power=11W Eff=65% EfcLed=106lm/W EfcLum=69lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	70 90 97 100 100			D DIN 5040	A50		
F UTE	1.00 C			B NBN	BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.30	0.59	0.89	1.19	1.49	OC	0.67	1.34	2.00	2.67	3.34
OB	0.42	0.85	1.27	1.70	2.12	OD	0.67	1.34	2.00	2.67	3.34

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	659.46	509.50	231.48	90.30	41.77	24.50	13.06	5.93	1.03	0.57
OB	659.46	755.71	721.15	503.46	254.34	109.18	68.38	53.77	38.95	21.39
OC	659.46	649.00	568.72	441.88	319.36	217.26	132.18	69.33	30.27	6.84
OD	659.46	649.00	568.72	441.88	319.36	217.26	132.18	69.33	30.27	6.84

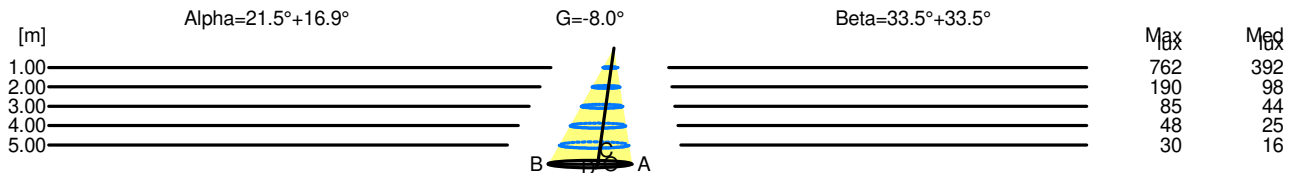

H[m]	D[m]	Max lux	Med lux	Alpha=21.5°+16.9°	G=-8.0
1.00	0.72	762	392		
2.00	1.44	190	98		
3.00	2.17	85	44		
4.00	2.89	48	25		
5.00	3.61	30	16		

H[m]	D[m]	Max lux	Med lux	Beta=33.5°+33.5°	G=0.0
1.00	1.34	762	392		
2.00	2.67	190	98		
3.00	4.01	85	44		
4.00	5.35	48	25		
5.00	6.68	30	16		