

Luminaire


Code AF69900+AF95204
 Name SHARP RECESSED TRIMLESS 12X 36W 927 VERY WIDE FLOOD EXT.DRV + SCREEN 4X BLACK

Measurement

Code FTS1902009-A
 Name SHARP RECESSED TRIMLESS 12X 36W 927 VERY WIDE FLOOD EXT.DRV + SCREEN 4X BLACK

| | | | | | | | |
|--|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 2279 lm | Luminaire Power | 33.0 W | Efficacy | 69.061 lm/W | Efficiency | 100.00% |
| Source Flux | 2279 lm | Maximum value | 1430.97 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 460 mm | Width | 40 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 444 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.016428 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.003974 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 25-11-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2279 lm | |
| LED Flux=3181lm LED Power=33W Eff=72% EfcLed=96lm/W EfcLum=69lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |


460mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

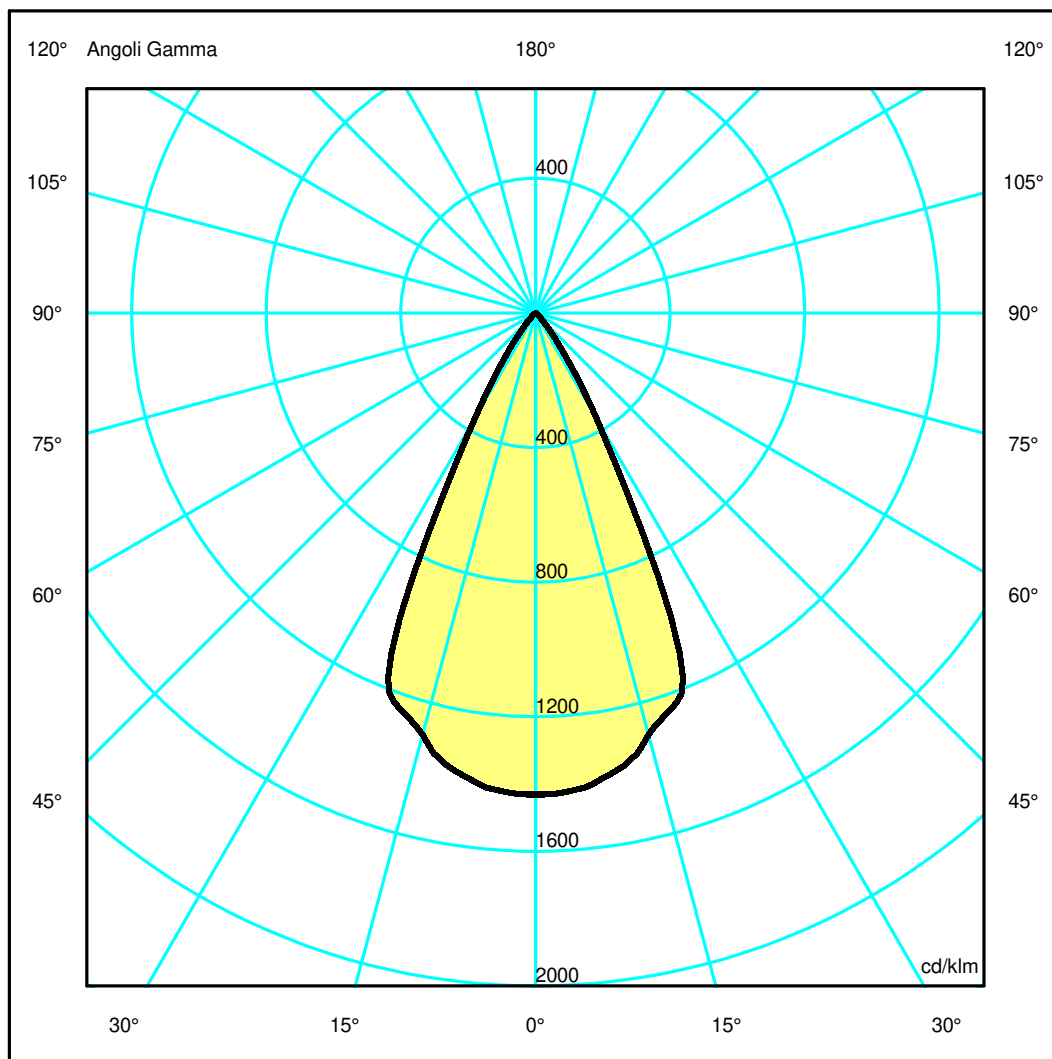

Luminaire

Code AF69900+AF95204
 Name SHARP RECESSED TRIMLESS 12X 36W 927 VERY WIDE FLOOD EXT.DRV + SCREEN 4X BLACK

Measurement


Code FTS1902009-A
 Name SHARP RECESSED TRIMLESS 12X 36W 927 VERY WIDE FLOOD EXT.DRV + SCREEN 4X BLACK

| | | | | | | | |
|--|---------|-------------------------|----------------|-----------------------------|---------------|-------------------------|-----------------|
| Luminaire Flux | 2279 lm | Luminaire Power | 33.0 W | Efficacy | 69.061 lm/W | Efficiency | 100.00% |
| Source Flux | 2279 lm | Maximum value | 1430.97 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 460 mm | Width | 40 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 444 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.016428 m ² | | Emitting area on Plane 180° | | 0.000000 m ² | |
| Emitting area on Plane 0° | | 0.000000 m ² | | Emitting area on Plane 270° | | 0.000000 m ² | |
| Emitting area on Plane 90° | | 0.000000 m ² | | Glare area at 76° | | 0.003974 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 25-11-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2279 lm | |
| LED Flux=3181lm LED Power=33W Eff=72% EfcLed=96lm/W EfcLum=69lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 | OC | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 |
| OB | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 | OD | 0.49 | 0.98 | 1.47 | 1.96 | 2.44 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|---------|--------|-------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 3261.19 | 3237.74 | 2956.28 | 1966.42 | 348.18 | 50.79 | 3.96 | 0.00 | 0.00 | 0.00 |
| OB | 3261.19 | 3237.74 | 2956.28 | 1966.42 | 348.18 | 50.79 | 3.96 | 0.00 | 0.00 | 0.00 |
| OC | 3261.19 | 3237.74 | 2956.28 | 1966.42 | 348.18 | 50.79 | 3.96 | 0.00 | 0.00 | 0.00 |
| OD | 3261.19 | 3237.74 | 2956.28 | 1966.42 | 348.18 | 50.79 | 3.96 | 0.00 | 0.00 | 0.00 |

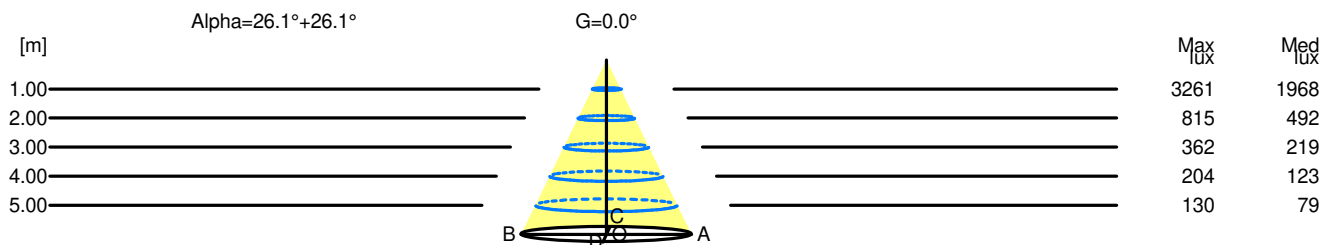

| H[m] | D[m] | Max lux | Med lux | Alpha=26.1°+26.1° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.98 | 3261 | 1968 | | |
| 2.00 | 1.96 | 815 | 492 | | |
| 3.00 | 2.93 | 362 | 219 | | |
| 4.00 | 3.91 | 204 | 123 | | |
| 5.00 | 4.89 | 130 | 79 | | |