

Luminaire

Code AF75000+AF95201
 Name SHARP RECESSED TRIMLESS 16X 48W 930 FLOOD EXT.DRV + SCREEN 4X WHITE

Measurem.


Code FTS1603392
 Name SHARP RECESSED TRIMLESS 16X 48W 930 FLOOD EXT.DRV + SCREEN 4X WHITE

Luminaire Flux	3215.38 lm	Luminaire Power	44.00 W	Efficacy	73.08 lm/W	Efficiency	100.00%
Lamps Flux	3215.38 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	612 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.021904 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3215.38 lm	

LED Flux=4245,28lm LED Power=44W Eff=76% EfcLed=96lm/W EfcLum=73lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 99 100 100 100 100
 F UTE --

D DIN 5040
 B NBN
 A60
 BZ 1

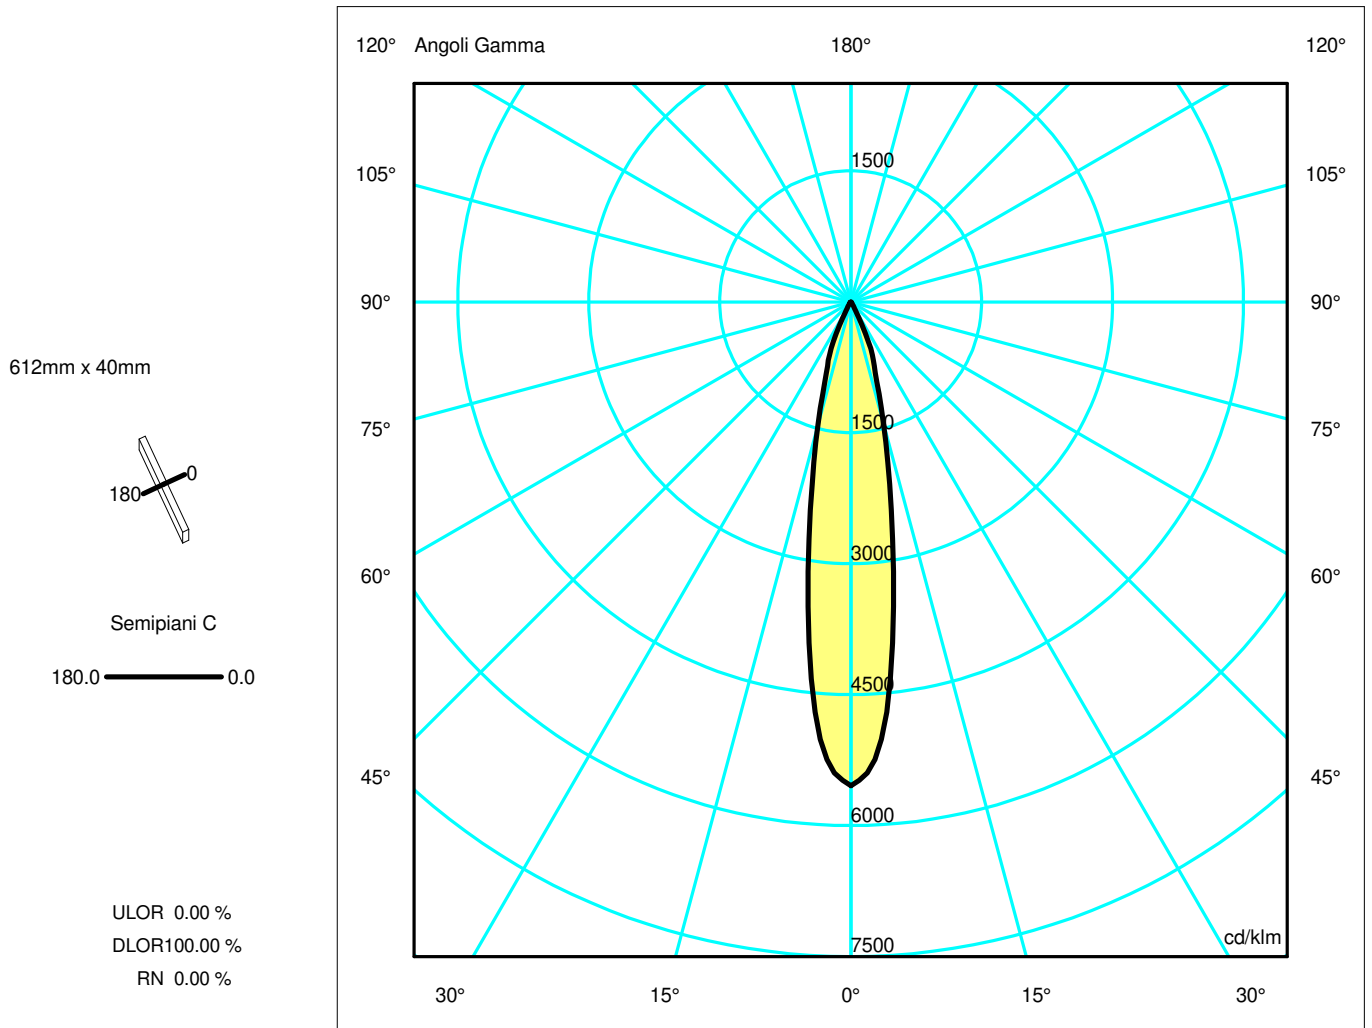

Luminaire

Code AF75000+AF95201
Name SHARP RECESSED TRIMLESS 16X 48W 930 FLOOD EXT.DRV + SCREEN 4X WHITE

Measurement


Code FTS1603392
Name SHARP RECESSED TRIMLESS 16X 48W 930 FLOOD EXT.DRV + SCREEN 4X WHITE

Luminaire Flux	3215.38 lm	Luminaire Power	44.00 W	Efficacy	73.08 lm/W	Efficiency	100.00%
Lamps Flux	3215.38 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	612 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.021904 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3215.38 lm	
LED Flux=4245,28lm LED Power=44W Eff=76% EfcLed=96lm/W EfcLum=73lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	17818.20	15163.35	4678.07	1279.07	80.26	22.64	7.87	5.04	3.57	1.69
OB	17818.20	15163.35	4678.07	1279.07	80.26	22.64	7.87	5.04	3.57	1.69
OC	17818.20	15163.35	4678.07	1279.07	80.26	22.64	7.87	5.04	3.57	1.69
OD	17818.20	15163.35	4678.07	1279.07	80.26	22.64	7.87	5.04	3.57	1.69

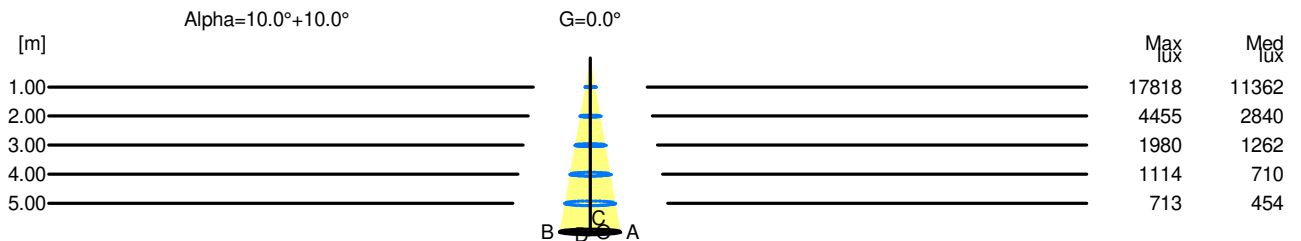

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	17818	11362		
2.00	0.70	4455	2840		
3.00	1.05	1980	1262		
4.00	1.41	1114	710		
5.00	1.76	713	454		