


Luminaire

Code AF86701
Name SHARP SMD.16X 44W 930 WW ND BCO/BCO

Measurerm.

Code FTS1903547
Name SHARP SMD.16X 44W 930 WW ND BCO/BCO

Luminaire Flux	2829.54 lm	Luminaire Power	47.00 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	2829.54 lm	Maximum value	1037.05 cd/klm	Position	C=170.00 G=9.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	600 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	590 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.018880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004567 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		23-10-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2829.54 lm	
LED Flux=4372lm LED Power=44W Eff=65% EfcLed=99lm/W EfcLum=60lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=118000h							
C.I.E.	70 90 97 100 100			D DIN 5040	A50		
F UTE	1.00 C			B NBN	BZ 2		

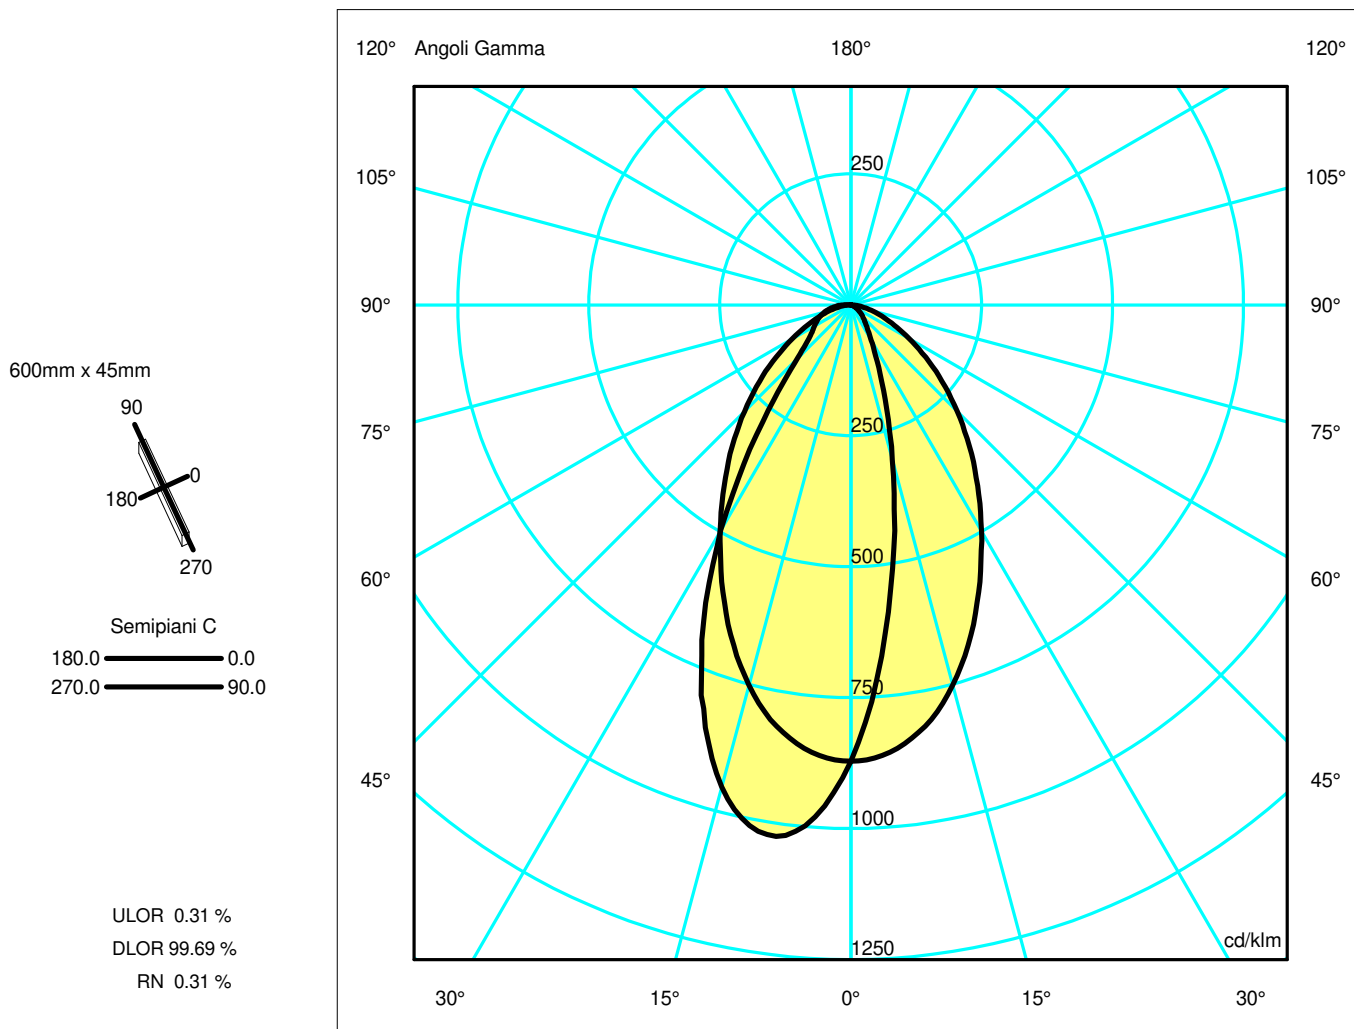

Luminaire

Code AF86701
Name SHARP SMD.16X 44W 930 WW ND BCO/BCO

Measurerm.


Code FTS1903547
Name SHARP SMD.16X 44W 930 WW ND BCO/BCO

Luminaire Flux	2829.54 lm	Luminaire Power	47.00 W	Efficacy	60.20 lm/W	Efficiency	100.00%
Lamps Flux	2829.54 lm	Maximum value	1037.05 cd/klm	Position	C=170.00 G=9.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	600 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	590 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.018880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004567 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		23-10-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2829.54 lm	
LED Flux=4372lm LED Power=44W Eff=65% EfcLed=99lm/W EfcLum=60lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=118000h							
C.I.E.	70 90 97 100 100			D DIN 5040	A50		
F UTE	1.00 C			B NBN	BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.30	0.59	0.89	1.19	1.49	OC	0.67	1.34	2.00	2.67	3.34
OB	0.42	0.85	1.27	1.70	2.12	OD	0.67	1.34	2.00	2.67	3.34

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2464.88	1904.38	865.23	337.51	156.13	91.59	48.83	22.17	3.85	2.11
OB	2464.88	2824.63	2695.48	1881.80	950.66	408.09	255.59	200.97	145.59	79.95
OC	2464.88	2425.79	2125.73	1651.64	1193.67	812.05	494.06	259.14	113.14	25.58
OD	2464.88	2425.79	2125.73	1651.64	1193.67	812.05	494.06	259.14	113.14	25.58

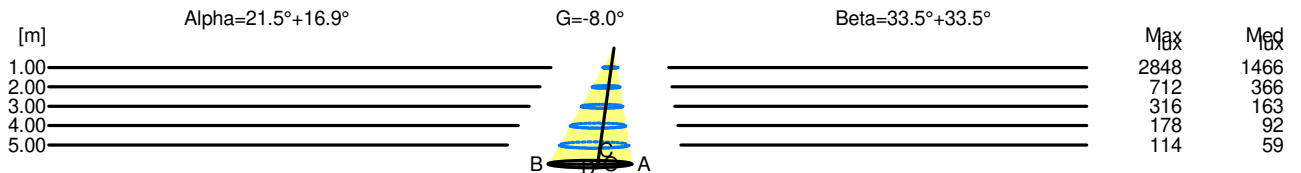

H[m]	D[m]	Max lux	Med lux	Alpha=21.5°+16.9°	G=-8.0
1.00	0.72	2848	1466		
2.00	1.44	712	366		
3.00	2.17	316	163		
4.00	2.89	178	92		
5.00	3.61	114	59		

H[m]	D[m]	Max lux	Med lux	Beta=33.5°+33.5°	G=0.0
1.00	1.34	2848	1466		
2.00	2.67	712	366		
3.00	4.01	316	163		
4.00	5.35	178	92		
5.00	6.68	114	59		