

Luminaire

Code AN05718+AP90300
Name VECTOR 40 TRACK 940 FL DALI BR.COPPER + SOFT FILTER

Measurement

Code FTS1800515
Name VECTOR 40 TRACK 940 FL DALI BR.COPPER + SOFT FILTER

| | | | | | | | |
|----------------------------|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 429 lm | Luminaire Power | 10.0 W | Efficacy | 42.919 lm/W | Efficiency | 100.00% |
| Source Flux | 429 lm | Maximum value | 3823.34 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.000573 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.000139 m2 |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 14-05-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 429 lm | |

LED Flux=906,8lm LED Power=8W Eff=47% EfcLed=113lm/W EfcLum=43lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h

C.I.E. 97 99 100 100 100
F UTE --

D DIN 5040
B NBN

A60
BZ 1


Diam=40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

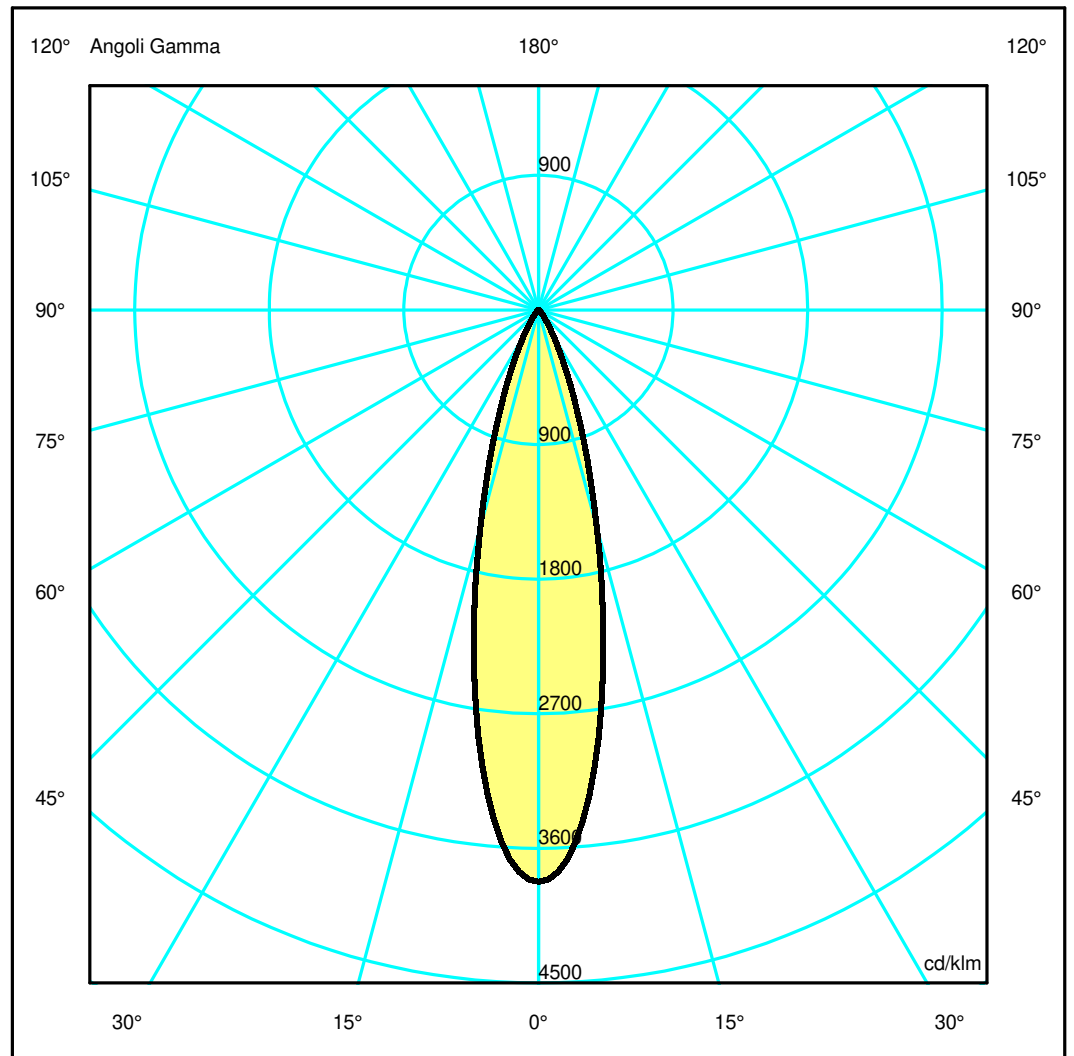

Luminaire

Code AN05718+AP90300
Name VECTOR 40 TRACK 940 FL DALI BR.COPPER + SOFT FILTER

Measurerm.

Code FTS1800515
Name VECTOR 40 TRACK 940 FL DALI BR.COPPER + SOFT FILTER

| | | | | | | | |
|----------------------------|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 429 lm | Luminaire Power | 10.0 W | Efficacy | 42.919 lm/W | Efficiency | 100.00% |
| Source Flux | 429 lm | Maximum value | 3823.34 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000139 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 14-05-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 429 lm | |


LED Flux=906,8lm LED Power=8W Eff=47% EfcLed=113lm/W EfcLum=43lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h

| | | | |
|--------|-------------------|------------|------|
| C.I.E. | 97 99 100 100 100 | D DIN 5040 | A60 |
| F UTE | -- | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 | OC | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 |
| OB | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 | OD | 0.23 | 0.45 | 0.68 | 0.91 | 1.14 |

| | | | | | | | | | | | |
|----|---------------------------------|---------|--------|--------|-------|------|------|------|------|------|--|
| | Luminous Intensities [cd/klm] | | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 | |
| OA | 1640.94 | 1469.30 | 647.25 | 175.89 | 38.82 | 9.14 | 3.02 | 1.67 | 0.84 | 0.22 | |
| OB | 1640.94 | 1469.30 | 647.25 | 175.89 | 38.82 | 9.14 | 3.02 | 1.67 | 0.84 | 0.22 | |
| OC | 1640.94 | 1469.30 | 647.25 | 175.89 | 38.82 | 9.14 | 3.02 | 1.67 | 0.84 | 0.22 | |
| OD | 1640.94 | 1469.30 | 647.25 | 175.89 | 38.82 | 9.14 | 3.02 | 1.67 | 0.84 | 0.22 | |

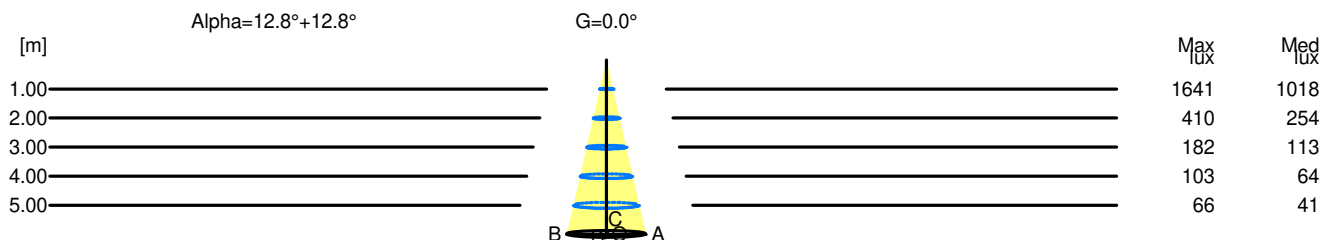

| H[m] | D[m] | Max lux | Med lux | Alpha=12.8°+12.8° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.45 | 1641 | 1018 | | |
| 2.00 | 0.91 | 410 | 254 | | |
| 3.00 | 1.36 | 182 | 113 | | |
| 4.00 | 1.82 | 103 | 64 | | |
| 5.00 | 2.27 | 66 | 41 | | |