

## Luminaire

Code AP01118  
Name VECTOR 40 MAGNET 927 SP DALI BR.COPPER

## Measurement

Code FTS1801746-B  
Name VECTOR 40 MAGNET 927 SP DALI BR.COPPER

Luminaire Flux	544 lm	Luminaire Power	9.0 W	Efficacy	60.412 lm/W	Efficiency	100.00%
Source Flux	544 lm	Maximum value	12591.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	40 mm	Height	103 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		544 lm	

LED Flux=671lm LED Power=8W Eff=81% EfcLed=81lm/W EfcLum=60lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E. 99 100 100 100 100  
F UTE --

D DIN 5040  
B NBN

A60  
BZ 1


Diam=40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

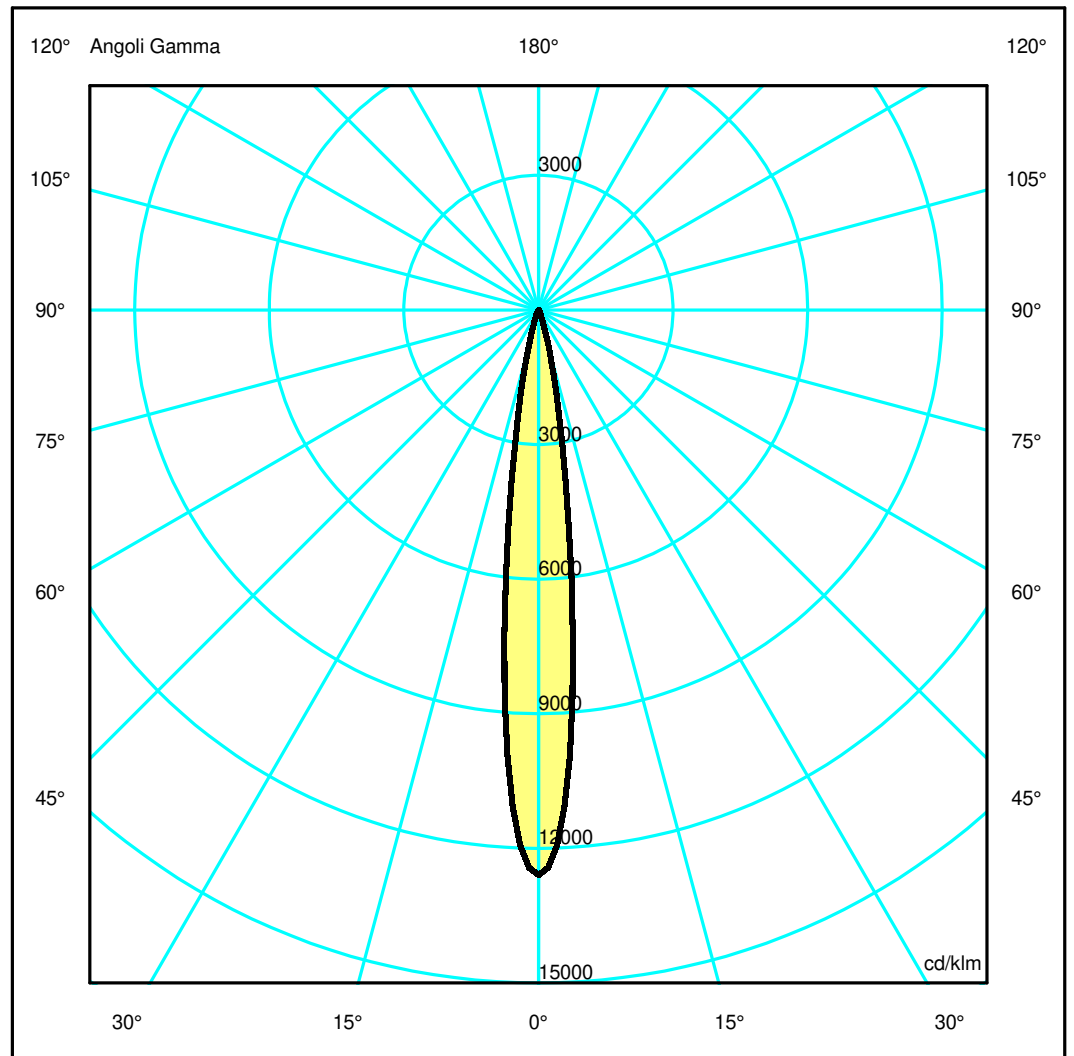

## Luminaire

Code AP01118  
Name VECTOR 40 MAGNET 927 SP DALI BR.COPPER

## Measurerm.

Code FTS1801746-B  
Name VECTOR 40 MAGNET 927 SP DALI BR.COPPER

Luminaire Flux	544 lm	Luminaire Power	9.0 W	Efficacy	60.412 lm/W	Efficiency	100.00%
Source Flux	544 lm	Maximum value	12591.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	40 mm	Height	103 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		544 lm	


LED Flux=671lm LED Power=8W Eff=81% EfcLed=81lm/W EfcLum=60lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.12	0.24	0.36	0.48	0.59	OC	0.12	0.24	0.36	0.48	0.59
OB	0.12	0.24	0.36	0.48	0.59	OD	0.12	0.24	0.36	0.48	0.59

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6846.29	4720.62	502.66	60.53	16.57	4.58	1.50	0.24	0.00	0.00
OB	6846.29	4720.62	502.66	60.53	16.57	4.58	1.50	0.24	0.00	0.00
OC	6846.29	4720.62	502.66	60.53	16.57	4.58	1.50	0.24	0.00	0.00
OD	6846.29	4720.62	502.66	60.53	16.57	4.58	1.50	0.24	0.00	0.00

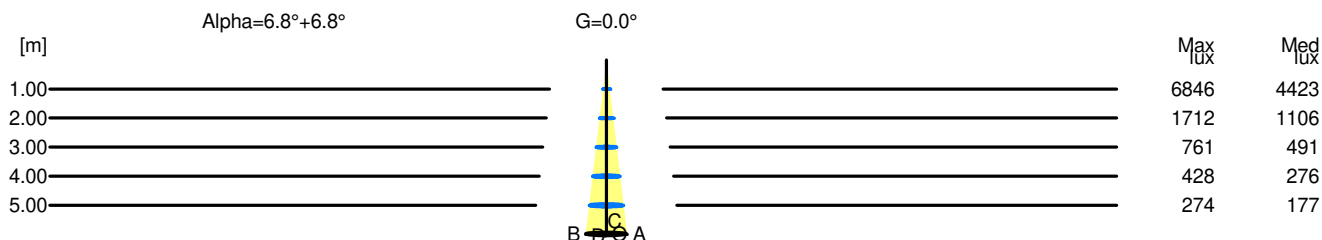

H[m]	D[m]	Max lux	Med lux	Alpha=6.8°+6.8°	G=0.0
1.00	0.24	6846	4423		
2.00	0.48	1712	1106		
3.00	0.71	761	491		
4.00	0.95	428	276		
5.00	1.19	274	177		