

Luminaire

Code AP05201+AP90400
Name VECTOR 40 MAGNET 940 FL DALI BCO + ANTI-DAZZLE LOUVRE

Measurem.

Code FTS1800605
Name VECTOR 40 MAGNET 940 FL DALI BCO + ANTI-DAZZLE LOUVRE

| | | | | | | | |
|--|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 322 lm | Luminaire Power | 9.0 W | Efficacy | 35.758 lm/W | Efficiency | 100.00% |
| Source Flux | 322 lm | Maximum value | 6075.95 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000139 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 23-09-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 322 lm | |
| LED Flux=907lm LED Power=8W Eff=35% EfcLed=113lm/W EfcLum=36lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | D DIN 5040 | A60 | |
| F UTE | -- | | | | B NBN | BZ 1 | |


Diam=40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

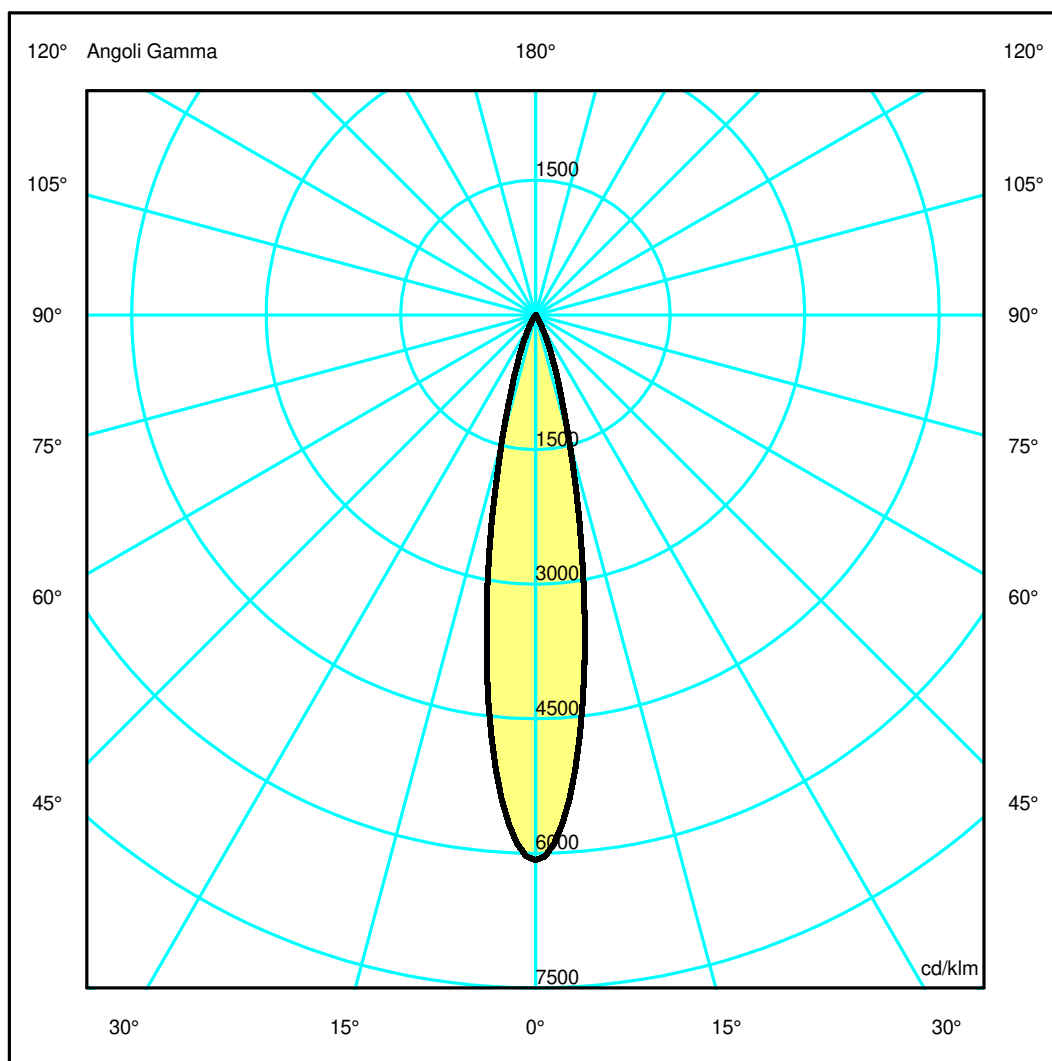

Luminaire

Code AP05201+AP90400
Name VECTOR 40 MAGNET 940 FL DALI BCO + ANTI-DAZZLE LOUVRE

Measurerm.


Code FTS1800605
Name VECTOR 40 MAGNET 940 FL DALI BCO + ANTI-DAZZLE LOUVRE

| | | | | | | | |
|--|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 322 lm | Luminaire Power | 9.0 W | Efficacy | 35.758 lm/W | Efficiency | 100.00% |
| Source Flux | 322 lm | Maximum value | 6075.95 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000139 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 23-09-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 322 lm | |
| LED Flux=907lm LED Power=8W Eff=35% EfcLed=113lm/W EfcLum=36lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.18 | 0.36 | 0.54 | 0.72 | 0.90 | OC | 0.18 | 0.36 | 0.54 | 0.72 | 0.90 |
| OB | 0.18 | 0.36 | 0.54 | 0.72 | 0.90 | OD | 0.18 | 0.36 | 0.54 | 0.72 | 0.90 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|--------|-------|-------|------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1955.36 | 1636.85 | 464.55 | 87.59 | 11.16 | 2.62 | 0.73 | 0.28 | 0.23 | 0.19 |
| OB | 1955.36 | 1636.85 | 464.55 | 87.59 | 11.16 | 2.62 | 0.73 | 0.28 | 0.23 | 0.19 |
| OC | 1955.36 | 1636.85 | 464.55 | 87.59 | 11.16 | 2.62 | 0.73 | 0.28 | 0.23 | 0.19 |
| OD | 1955.36 | 1636.85 | 464.55 | 87.59 | 11.16 | 2.62 | 0.73 | 0.28 | 0.23 | 0.19 |

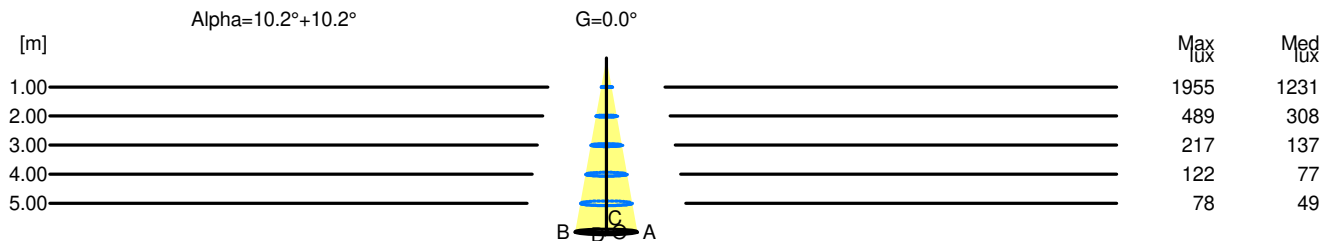

| H[m] | D[m] | Max lux | Med lux | Alpha=10.2°+10.2° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.36 | 1955 | 1231 | | |
| 2.00 | 0.72 | 489 | 308 | | |
| 3.00 | 1.08 | 217 | 137 | | |
| 4.00 | 1.43 | 122 | 77 | | |
| 5.00 | 1.79 | 78 | 49 | | |