


Luminaire

Code AP11218+AP91200
 Name VECTOR 55 MAGNET 927 FL DALI BR.COPPER + LENS FOR ELLIPTICAL EMISSION

Measurement

Code FTS2001419-B
 Name VECTOR 55 MAGNET 927 FL DALI BR.COPPER + LENS FOR ELLIPTICAL EMISSION

| | | | | | | | |
|--|------------------|-----------------|----------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 1185 lm | Luminaire Power | 19.0 W | Efficacy | 62.368 lm/W | Efficiency | 100.00% |
| Source Flux | 1185 lm | Maximum value | 3297.87 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 55 mm | Height | 130 mm | | |
| Round Luminous Area | | Diam. | 48 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.001810 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000438 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 29-02-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1185 lm | |
| LED Flux=2359lm LED Power=17W Eff=50% EfcLed=136lm/W EfcLum=62lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h | | | | | | | |
| C.I.E. | 94 98 99 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

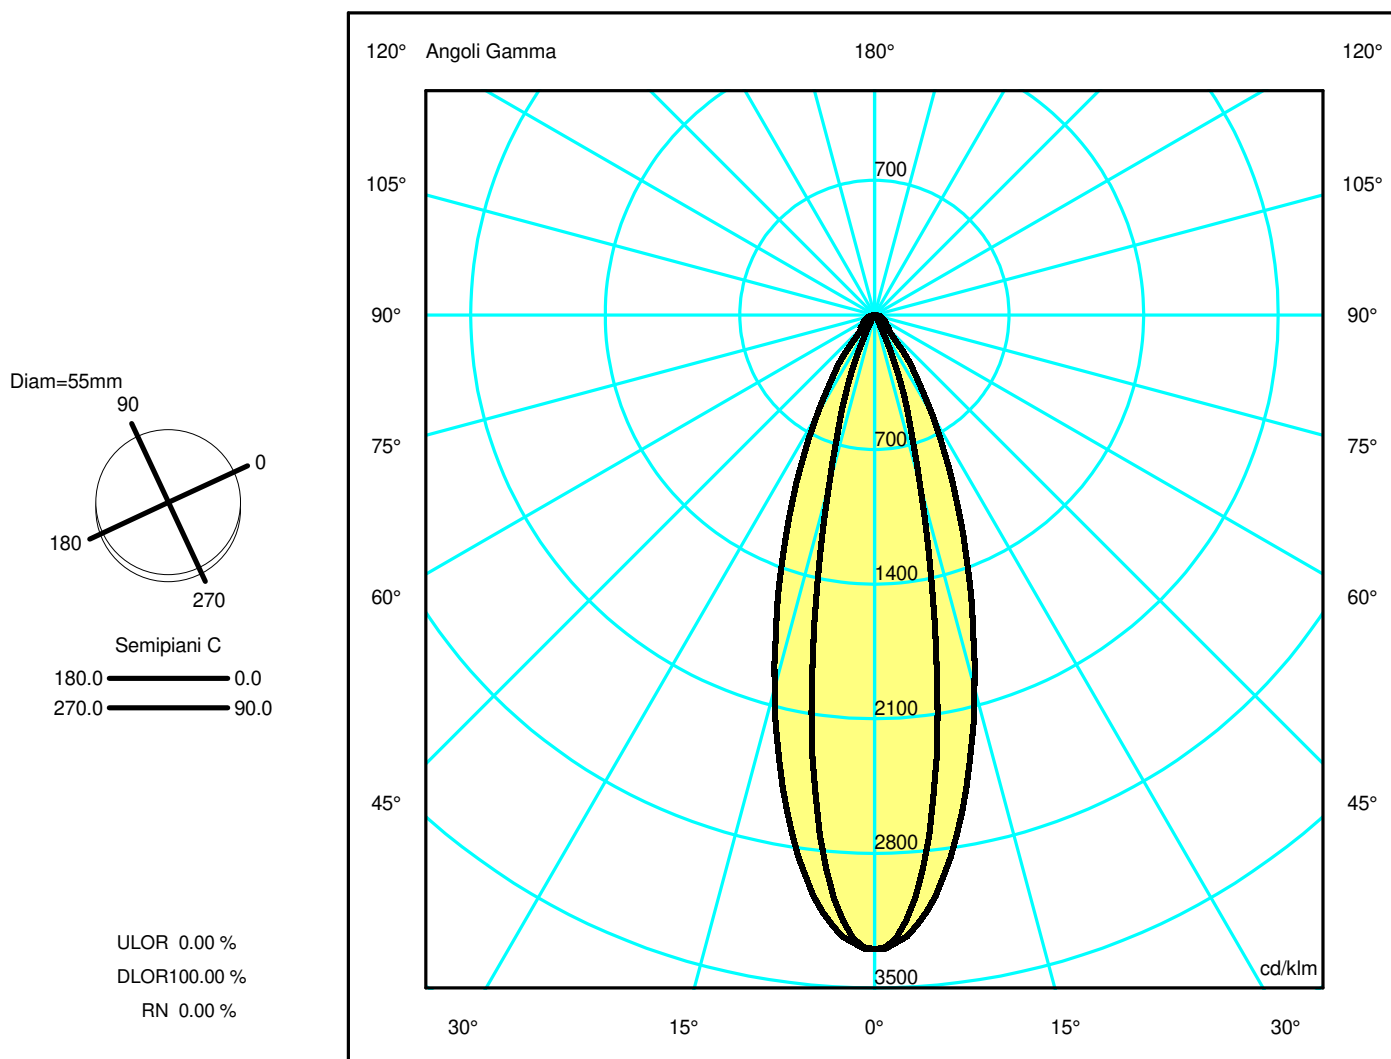

Luminaire

Code AP11218+AP91200
 Name VECTOR 55 MAGNET 927 FL DALI BR.COPPER + LENS FOR ELLIPTICAL EMISSION

Measurement


Code FTS2001419-B
 Name VECTOR 55 MAGNET 927 FL DALI BR.COPPER + LENS FOR ELLIPTICAL EMISSION

| | | | | | | | |
|--|------------------|-----------------|----------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 1185 lm | Luminaire Power | 19.0 W | Efficacy | 62.368 lm/W | Efficiency | 100.00% |
| Source Flux | 1185 lm | Maximum value | 3297.87 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 55 mm | Height | 130 mm | | |
| Round Luminous Area | | Diam. | 48 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.001810 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000438 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 29-02-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1185 lm | |
| LED Flux=2359lm LED Power=17W Eff=50% EfcLed=136lm/W EfcLum=62lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h | | | | | | | |
| C.I.E. | 94 98 99 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.19 | 0.39 | 0.58 | 0.78 | 0.97 | OC | 0.32 | 0.65 | 0.97 | 1.30 | 1.62 |
| OB | 0.19 | 0.39 | 0.58 | 0.78 | 0.97 | OD | 0.32 | 0.65 | 0.97 | 1.30 | 1.62 |

| | | | | | | | | | | |
|----|---------------------------------|---------|---------|---------|--------|--------|-------|-------|-------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 3907.97 | 3425.00 | 1084.54 | 173.02 | 29.74 | 12.95 | 8.04 | 5.66 | 4.21 | 1.23 |
| OB | 3907.97 | 3425.00 | 1084.54 | 173.02 | 29.74 | 12.95 | 8.04 | 5.66 | 4.21 | 1.23 |
| OC | 3907.97 | 3690.61 | 2377.13 | 1137.51 | 414.91 | 114.44 | 87.25 | 57.38 | 37.21 | 8.61 |
| OD | 3907.97 | 3690.61 | 2377.13 | 1137.51 | 414.91 | 114.44 | 87.25 | 57.38 | 37.21 | 8.61 |

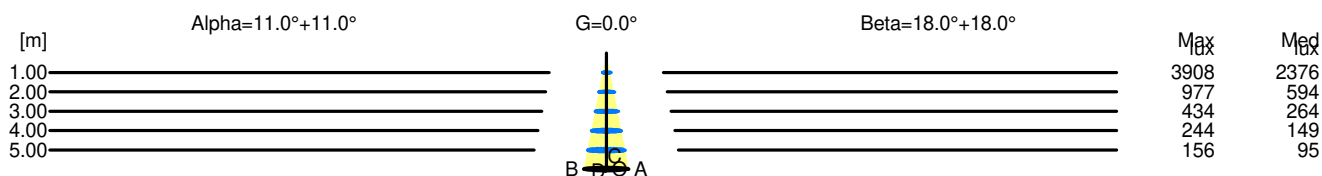

| H[m] | D[m] | Max lux | Med lux | Alpha=11.0°+11.0° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.39 | 3908 | 2376 | | |
| 2.00 | 0.78 | 977 | 594 | | |
| 3.00 | 1.17 | 434 | 264 | | |
| 4.00 | 1.56 | 244 | 149 | | |
| 5.00 | 1.94 | 156 | 95 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=18.0°+18.0° | G=0.0 |
|------|------|---------|---------|------------------|-------|
| 1.00 | 0.65 | 3908 | 2376 | | |
| 2.00 | 1.30 | 977 | 594 | | |
| 3.00 | 1.95 | 434 | 264 | | |
| 4.00 | 2.60 | 244 | 149 | | |
| 5.00 | 3.25 | 156 | 95 | | |