

Luminaire

Code AP11220+AP91400
 Name VECTOR 55 MAGNET 927 FL DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

Measurement

Code FTS2001449-B
 Name VECTOR 55 MAGNET 927 FL DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

Luminaire Flux	1209 lm	Luminaire Power	19.0 W	Efficacy	63.632 lm/W	Efficiency	100.00%
Source Flux	1209 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000438 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1209 lm	
LED Flux=2359lm LED Power=17W Eff=51% EfcLed=136lm/W EfcLum=64lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

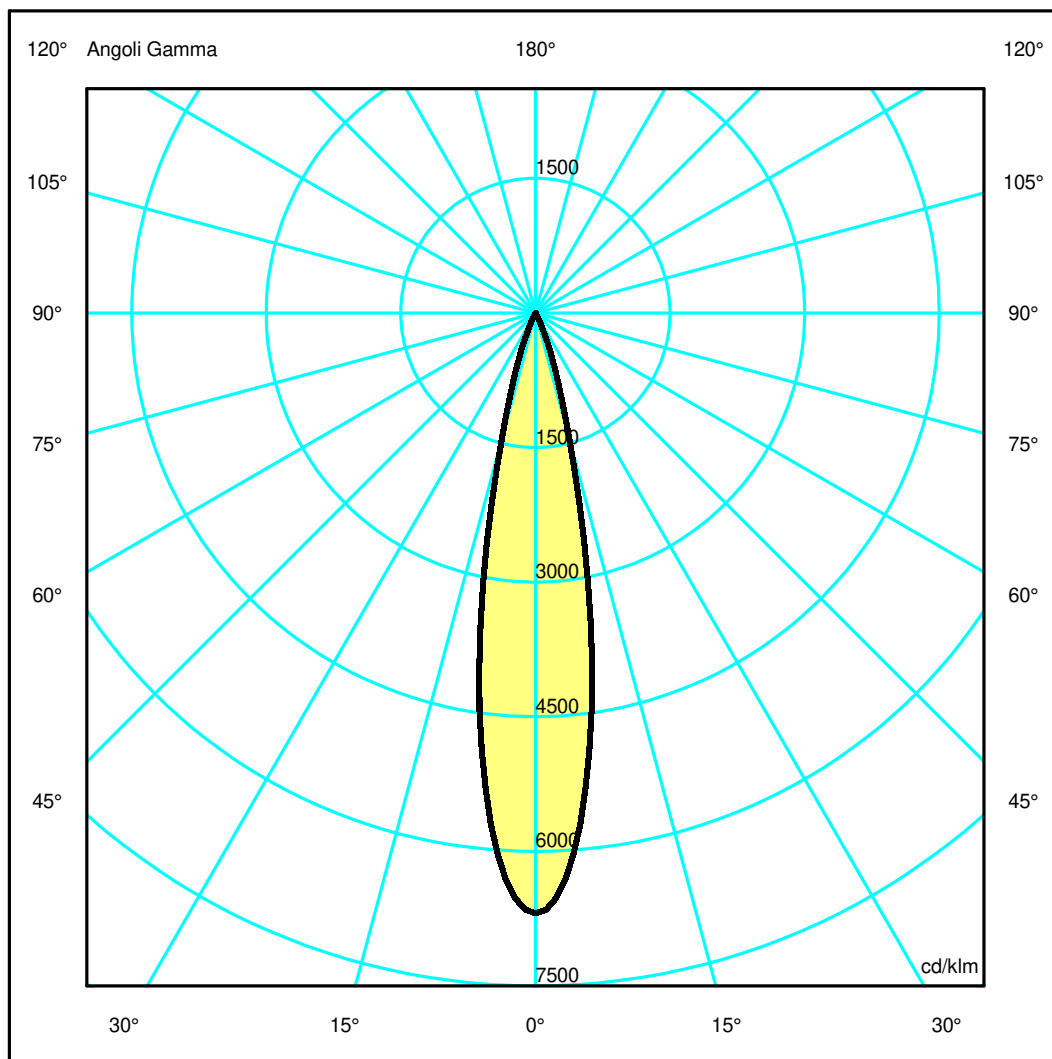

Luminaire

Code AP11220+AP91400
 Name VECTOR 55 MAGNET 927 FL DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

Measurerm.


Code FTS2001449-B
 Name VECTOR 55 MAGNET 927 FL DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

Luminaire Flux	1209 lm	Luminaire Power	19.0 W	Efficacy	63.632 lm/W	Efficiency	100.00%
Source Flux	1209 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000438 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1209 lm	
LED Flux=2359lm LED Power=17W Eff=51% EfcLed=136lm/W EfcLum=64lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.37	0.55	0.74	0.92	OC	0.18	0.37	0.55	0.74	0.92
OB	0.18	0.37	0.55	0.74	0.92	OD	0.18	0.37	0.55	0.74	0.92

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	8085.95	6907.92	1770.29	162.27	15.69	4.31	1.51	0.48	0.36	0.27
OB	8085.95	6907.92	1770.29	162.27	15.69	4.31	1.51	0.48	0.36	0.27
OC	8085.95	6907.92	1770.29	162.27	15.69	4.31	1.51	0.48	0.36	0.27
OD	8085.95	6907.92	1770.29	162.27	15.69	4.31	1.51	0.48	0.36	0.27

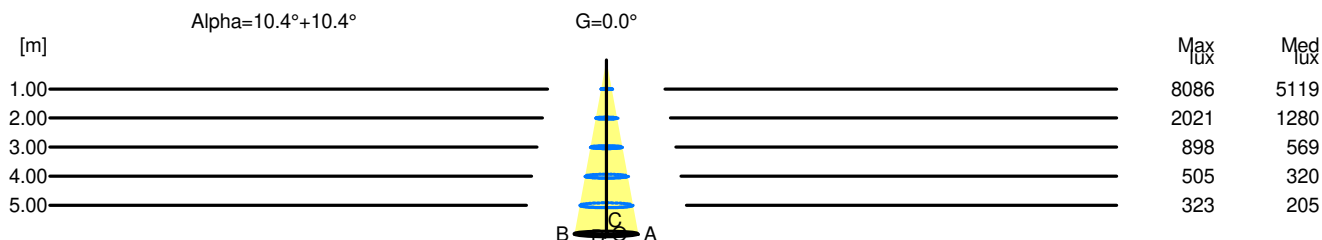

H[m]	D[m]	Max lux	Med lux	Alpha=10.4°+10.4°	G=0.0
1.00	0.37	8086	5119		
2.00	0.74	2021	1280		
3.00	1.10	898	569		
4.00	1.47	505	320		
5.00	1.84	323	205		