

## Luminaire

Code AP15320+AP91400  
 Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

## Measurement

Code FTS1800392-A  
 Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

|  |         |                         |                |                             |               |                         |                 |
|--|---------|-------------------------|----------------|-----------------------------|---------------|-------------------------|-----------------|
| Luminaire Flux   | 1302 lm | Luminaire Power         | 23.0 W         | Efficacy                    | 56.590 lm/W   | Efficiency              | 100.00%         |
| Source Flux  | 1302 lm | Maximum value           | 4326.59 cd/klm | Position                    | C=0.00 G=0.00 | CG                      | Rotosymmetrical |
| Round Luminaire  |         | Diam.                   | 55 mm          | Height                      | 130 mm        |                         |                 |
| Round Luminous Area  |         | Diam.                   | 46 mm          | Height                      | 0 mm          |                         |                 |
| Horizontal Luminous Area   |         | 0.001662 m <sup>2</sup> |                | Emitting area on Plane 180° |               | 0.000000 m <sup>2</sup> |                 |
| Emitting area on Plane 0°  |         | 0.000000 m <sup>2</sup> |                | Emitting area on Plane 270° |               | 0.000000 m <sup>2</sup> |                 |
| Emitting area on Plane 90°   |         | 0.000000 m <sup>2</sup> |                | Glare area at 76°           |               | 0.000402 m <sup>2</sup> |                 |
| Coordinate system  |         | CG                      |                | Symmetry Type               |               | Rotosymmetrical         |                 |
| Date   |         | 22-10-2021              |                | Maximum Gamma Angle         |               | 180                     |                 |
| Measurement Distance   |         | 0.00                    |                | Measurement Flux            |               | 1302 lm                 |                 |
| LED Flux=2383lm LED Power=21W Eff=55% EfcLed=113lm/W EfcLum=57lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h |         |                         |                |                             |               |                         |                 |
| C.I.E.   | 100     | 100                     | 100            | 100                         | 100           | D DIN 5040              | A60             |
| F UTE  | --      |                         |                |                             |               | B NBN                   | BZ 1            |

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

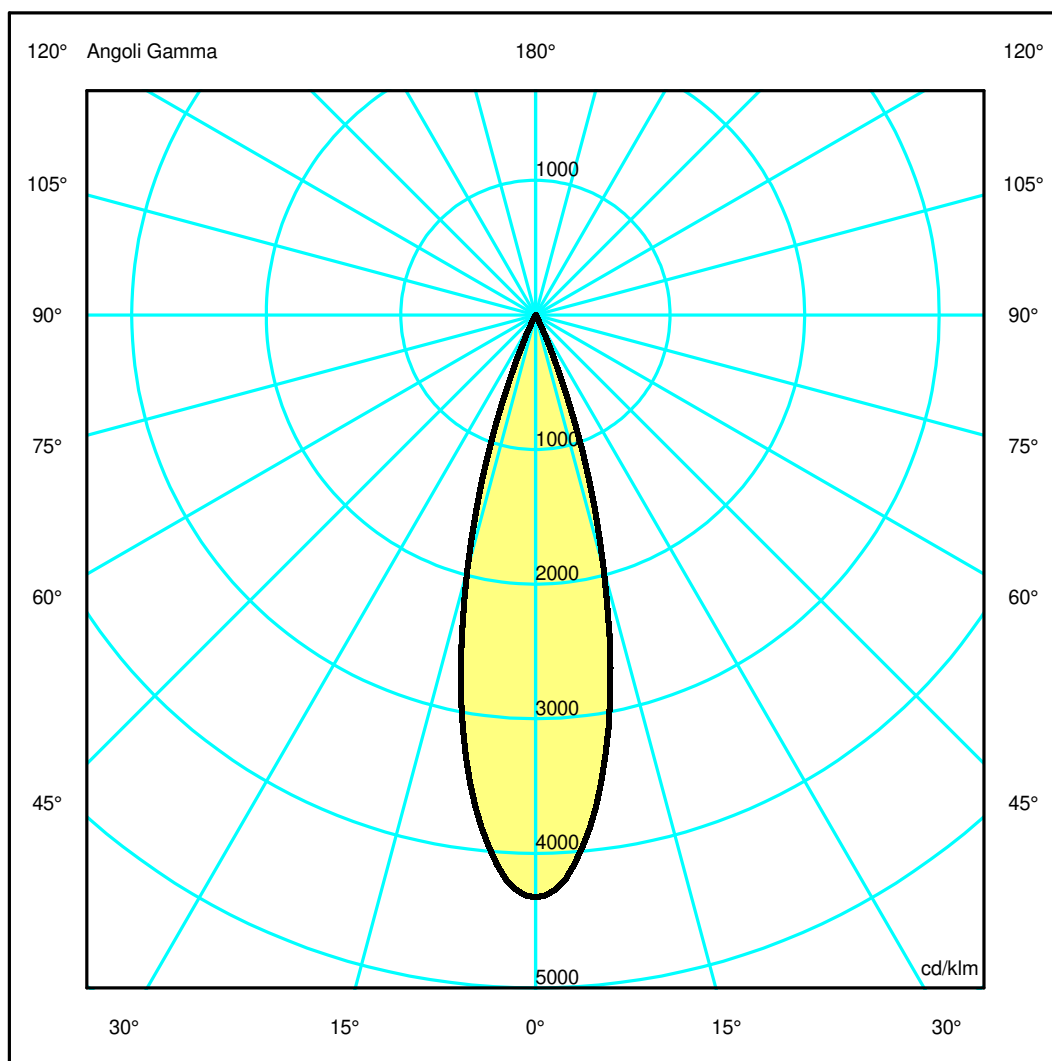

## Luminaire

Code AP15320+AP91400  
 Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

## Measurem.

Code FTS1800392-A  
 Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE + ANTI-DAZZLE LOUVRE

|                            |         |                 |                |                             |               |                 |                 |
|----------------------------|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux             | 1302 lm | Luminaire Power | 23.0 W         | Efficacy                    | 56.590 lm/W   | Efficiency      | 100.00%         |
| Source Flux                | 1302 lm | Maximum value   | 4326.59 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire            |         | Diam.           | 55 mm          | Height                      | 130 mm        |                 |                 |
| Round Luminous Area        |         | Diam.           | 46 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area   |         | 0.001662 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°  |         | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90° |         | 0.000000 m2     |                | Glare area at 76°           |               | 0.000402 m2     |                 |
| Coordinate system          |         | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date                       |         | 22-10-2021      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance       |         | 0.00            |                | Measurement Flux            |               | 1302 lm         |                 |


LED Flux=2383lm LED Power=21W Eff=55% EfcLed=113lm/W EfcLum=57lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

|        |     |     |     |     |  |            |      |
|--------|-----|-----|-----|-----|--|------------|------|
| C.I.E. | 100 | 100 | 100 | 100 |  | D DIN 5040 | A60  |
| F UTE  | --  |     |     |     |  | B NBN      | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 | OC   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 |
| OB   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 | OD   | 0.25 | 0.50 | 0.76 | 1.01 | 1.26 |

|    | Luminous Intensities [ cd/klm ] |         |         |        |       |      |      |      |      |      |
|----|---------------------------------|---------|---------|--------|-------|------|------|------|------|------|
|    | 0                               | 5       | 15      | 25     | 35    | 45   | 55   | 65   | 75   | 85   |
| OA | 5631.40                         | 5167.02 | 2545.37 | 202.45 | 18.49 | 4.57 | 1.56 | 0.50 | 0.35 | 0.29 |
| OB | 5631.40                         | 5167.02 | 2545.37 | 202.45 | 18.49 | 4.57 | 1.56 | 0.50 | 0.35 | 0.29 |
| OC | 5631.40                         | 5167.02 | 2545.37 | 202.45 | 18.49 | 4.57 | 1.56 | 0.50 | 0.35 | 0.29 |
| OD | 5631.40                         | 5167.02 | 2545.37 | 202.45 | 18.49 | 4.57 | 1.56 | 0.50 | 0.35 | 0.29 |

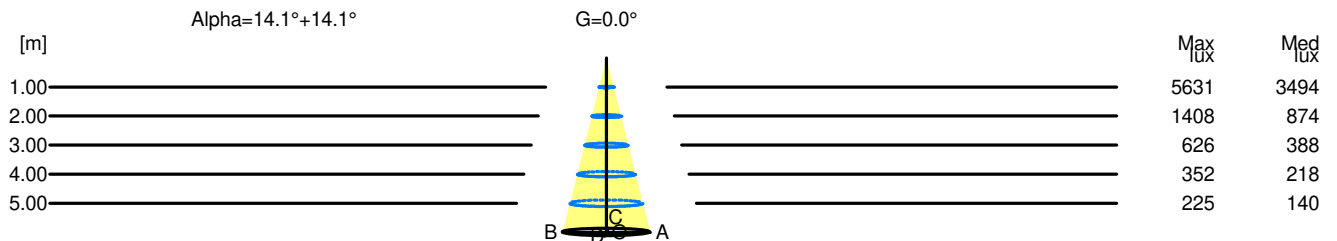

| H[m] | D[m] | Max lux | Med lux | Alpha=14.1°+14.1° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.50 | 5631    | 3494    |                   |       |
| 2.00 | 1.01 | 1408    | 874     |                   |       |
| 3.00 | 1.51 | 626     | 388     |                   |       |
| 4.00 | 2.01 | 352     | 218     |                   |       |
| 5.00 | 2.52 | 225     | 140     |                   |       |