

## Luminaire

Code AQ11815+AQ16XXX  
 Name A.24 GIUNTO T PLAF. DIFF. 4000K BSV + A.24 SCHERMO DIFF. OPALINO

## Measurement

Code FTS2300056-A  
 Name A.24 GIUNTO T PLAF. DIFF. 4000K BSV + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	2424 lm	Luminaire Power	22.0 W	Efficacy	110.182 lm/W	Efficiency	100.00%
Source Flux	2424 lm	Maximum value	348.18 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	605 mm	Width	315 mm	Height	55 mm
Rectangular Luminous Area		Length	312 mm	Width	48 mm	Height	0 mm
Horizontal Luminous Area		0.014976 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.003623 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2424 lm	


LED Flux=3732lm LED Power=20W Eff=65% EfcLed=187lm/W EfcLum=110lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=102000h

C.I.E. 47 78 96 100 100  
 F UTE 1.00 E

D DIN 5040  
 B NBN

A30  
 BZ 5 / 4 / BZ 4


605mm x 315mm



Semipiani C

180.0 ——— 0.0

ULOR 0.01 %  
 DLOR 99.99 %  
 RN 0.01 %

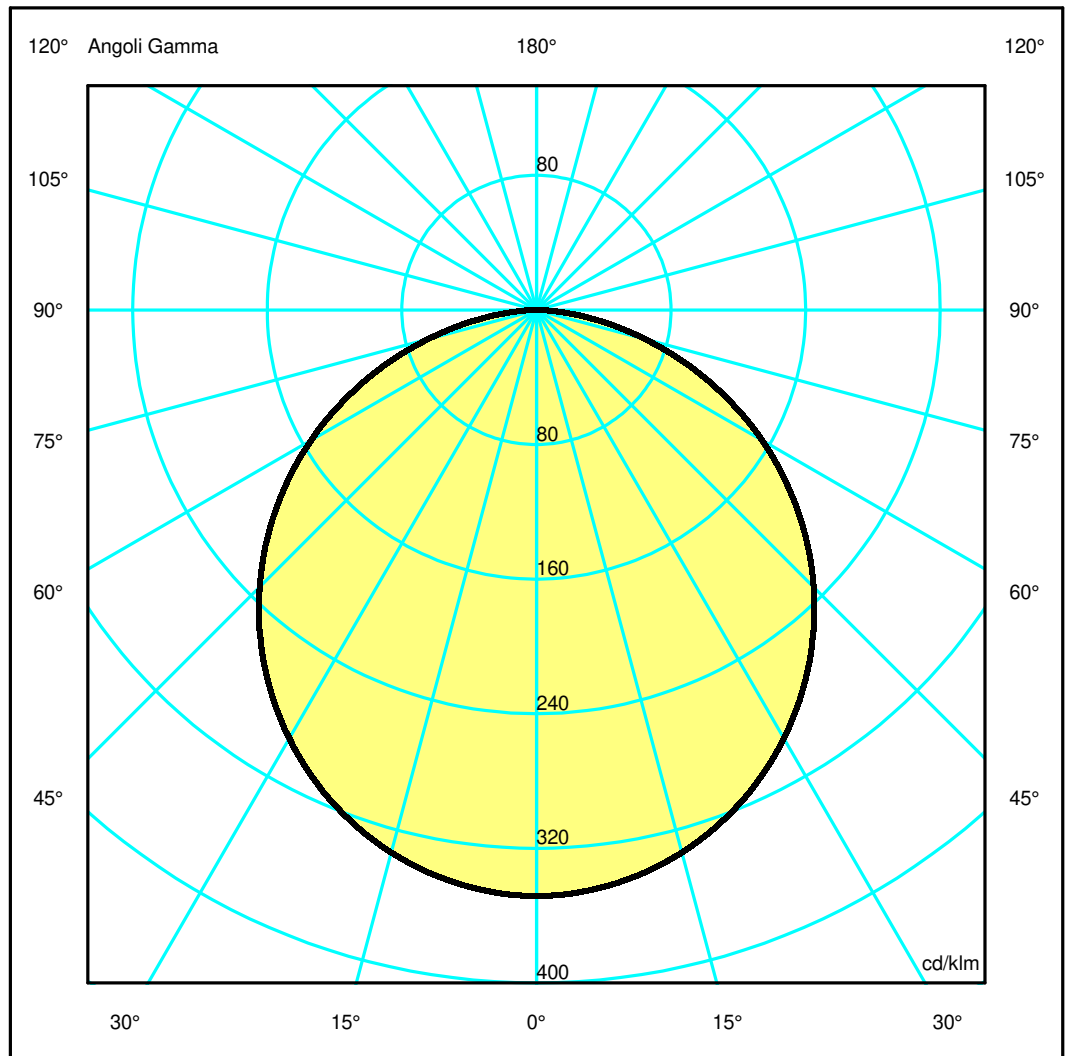

## Luminaire

Code AQ11815+AQ16XXX  
 Name A.24 GIUNTO T PLAF. DIFF. 4000K BSV + A.24 SCHERMO DIFF. OPALINO

## Measurerm.

Code FTS2300056-A  
 Name A.24 GIUNTO T PLAF. DIFF. 4000K BSV + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	2424 lm	Luminaire Power	22.0 W	Efficacy	110.182 lm/W	Efficiency	100.00%
Source Flux	2424 lm	Maximum value	348.18 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	605 mm	Width	315 mm	Height	55 mm
Rectangular Luminous Area		Length	312 mm	Width	48 mm	Height	0 mm
Horizontal Luminous Area		0.014976 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003623 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2424 lm	


LED Flux=3732lm LED Power=20W Eff=65% EfcLed=187lm/W EfcLum=110lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=102000h

C.I.E.	47 78 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 5 / 4 / BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.02	4.54	6.05	7.56	OC	1.51	3.02	4.54	6.05	7.56
OB	1.51	3.02	4.54	6.05	7.56	OD	1.51	3.02	4.54	6.05	7.56

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	843.88	839.87	809.08	751.13	668.51	564.52	442.03	305.23	162.43	40.48
OB	843.88	839.87	809.08	751.13	668.51	564.52	442.03	305.23	162.43	40.48
OC	843.88	839.87	809.08	751.13	668.51	564.52	442.03	305.23	162.43	40.48
OD	843.88	839.87	809.08	751.13	668.51	564.52	442.03	305.23	162.43	40.48

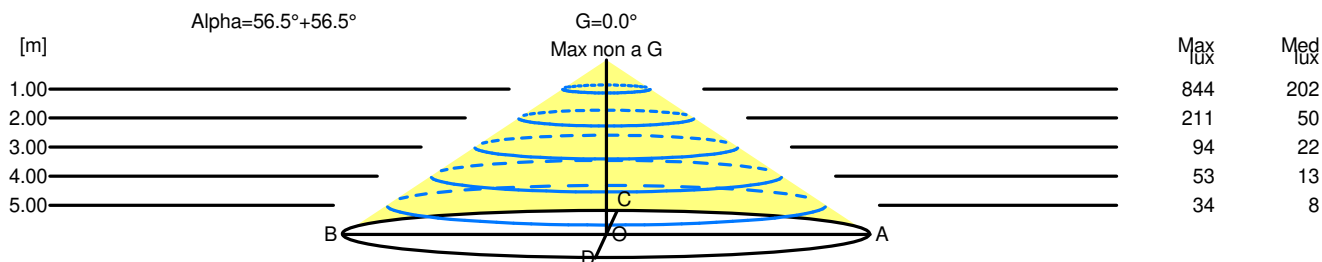

H[m]	D[m]	Max lux	Med lux	Alpha=56.5°+56.5°	G=0.0 Max non a G
1.00	3.02	844	202		
2.00	6.05	211	50		
3.00	9.07	94	22		
4.00	12.10	53	13		
5.00	15.12	34	8		