

Luminaire

Code AQ14715+AQ16XXX
 Name A.24 GIUNTO X PLAF DIFF. 2700K BSV + A.24 SCHERMO DIFF. OPALINO

Measurement

Code FTS2300051-A
 Name A.24 GIUNTO X PLAF DIFF. 2700K BSV + A.24 SCHERMO DIFF. OPALINO

| | | | | | | | |
|----------------------------|---------|-----------------|---------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 3002 lm | Luminaire Power | 29.0 W | Efficacy | 103.517 lm/W | Efficiency | 100.00% |
| Source Flux | 3002 lm | Maximum value | 348.02 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 605 mm | Width | 605 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 605 mm | Width | 48 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.029040 m2 | | Emitting area on Plane 180° | 0.000000 m2 | | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | 0.000000 m2 | | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | 0.007025 m2 | | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 20-09-2023 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3002 lm | |


LED Flux=4692lm LED Power=27W Eff=64% EfcLed=176lm/W EfcLum=104lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=102000h

C.I.E. 47 78 96 100 100
 F UTE 1.00 E

D DIN 5040
 B NBN

A30
 BZ 5 / 4 / BZ 4

605mm x 605mm




Semipiani C

180.0 ——— 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

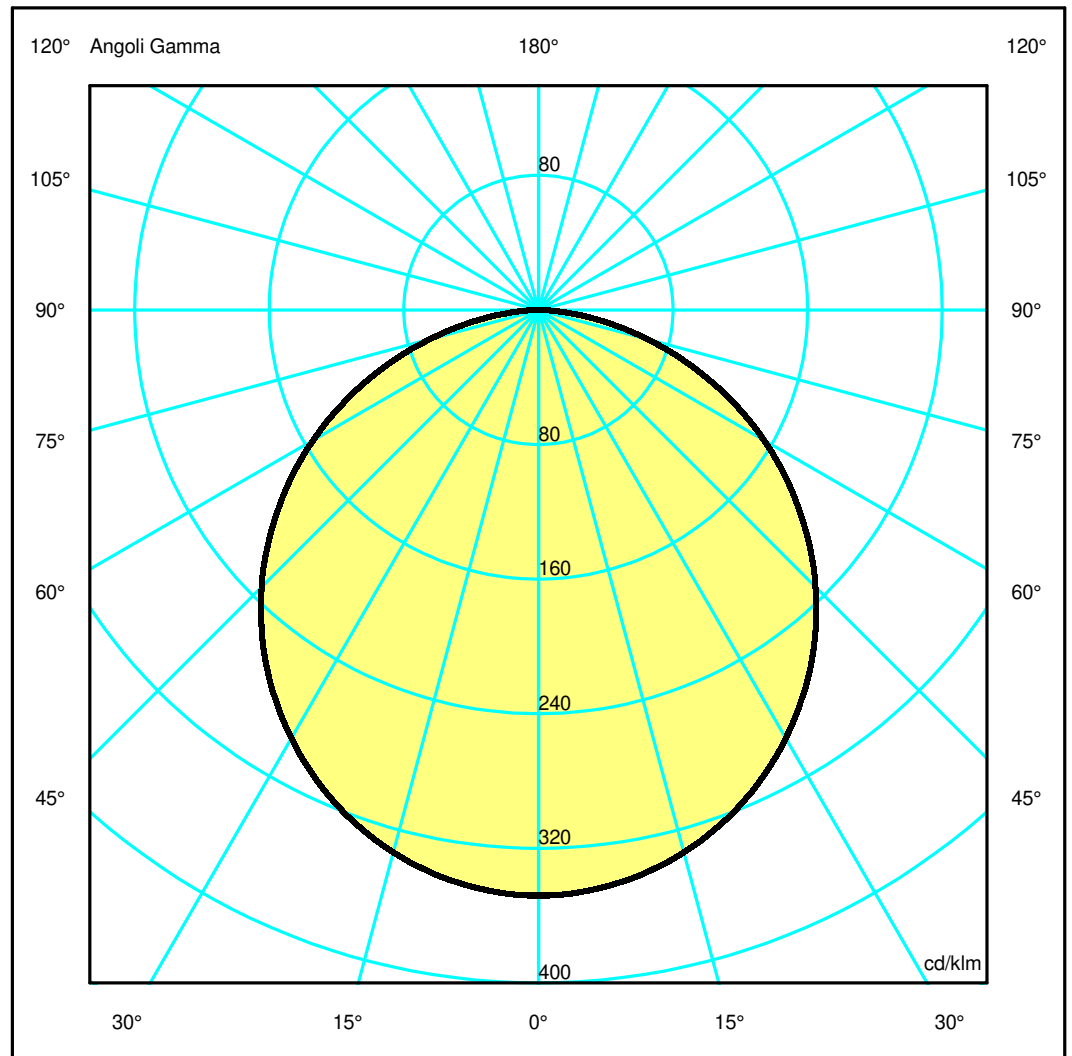

Luminaire

Code AQ14715+AQ16XXX
 Name A.24 GIUNTO X PLAF DIFF. 2700K BSV + A.24 SCHERMO DIFF. OPALINO

Measurerm.

Code FTS2300051-A
 Name A.24 GIUNTO X PLAF DIFF. 2700K BSV + A.24 SCHERMO DIFF. OPALINO

| | | | | | | | |
|----------------------------|---------|-------------------------|---------------|-----------------------------|---------------|-------------------------|-----------------|
| Luminaire Flux | 3002 lm | Luminaire Power | 29.0 W | Efficacy | 103.517 lm/W | Efficiency | 100.00% |
| Source Flux | 3002 lm | Maximum value | 348.02 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Rectangular Luminaire | | Length | 605 mm | Width | 605 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 605 mm | Width | 48 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.029040 m ² | | Emitting area on Plane 180° | | 0.000000 m ² | |
| Emitting area on Plane 0° | | 0.000000 m ² | | Emitting area on Plane 270° | | 0.000000 m ² | |
| Emitting area on Plane 90° | | 0.000000 m ² | | Glare area at 76° | | 0.007025 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 20-09-2023 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3002 lm | |


LED Flux=4692lm LED Power=27W Eff=64% EfcLed=176lm/W EfcLum=104lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=102000h

| | | | |
|--------|------------------|------------|-----------------|
| C.I.E. | 47 78 96 100 100 | D DIN 5040 | A30 |
| F UTE | 1.00 E | B NBN | BZ 5 / 4 / BZ 4 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 1.51 | 3.03 | 4.54 | 6.05 | 7.56 | OC | 1.51 | 3.03 | 4.54 | 6.05 | 7.56 |
| OB | 1.51 | 3.03 | 4.54 | 6.05 | 7.56 | OD | 1.51 | 3.03 | 4.54 | 6.05 | 7.56 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|--------|--------|--------|--------|--------|--------|-------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1044.74 | 1039.58 | 1001.64 | 929.87 | 828.24 | 698.95 | 547.08 | 378.38 | 201.12 | 50.45 |
| OB | 1044.74 | 1039.58 | 1001.64 | 929.87 | 828.24 | 698.95 | 547.08 | 378.38 | 201.12 | 50.45 |
| OC | 1044.74 | 1039.58 | 1001.64 | 929.87 | 828.24 | 698.95 | 547.08 | 378.38 | 201.12 | 50.45 |
| OD | 1044.74 | 1039.58 | 1001.64 | 929.87 | 828.24 | 698.95 | 547.08 | 378.38 | 201.12 | 50.45 |

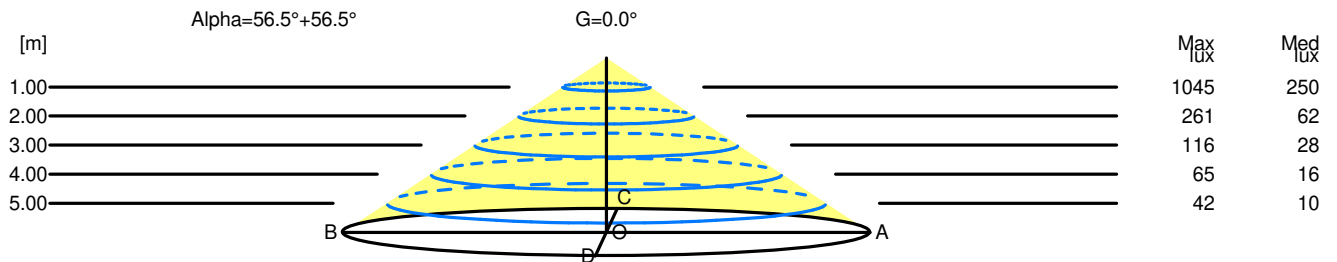

| H[m] | D[m] | Max lux | Med lux | Alpha=56.5°+56.5° | G=0.0 |
|------|-------|---------|---------|-------------------|-------|
| 1.00 | 3.03 | 1045 | 250 | | |
| 2.00 | 6.05 | 261 | 62 | | |
| 3.00 | 9.08 | 116 | 28 | | |
| 4.00 | 12.10 | 65 | 16 | | |
| 5.00 | 15.13 | 42 | 10 | | |