

Luminaire

Code AQ27101+AQ16XXX
 Name A.24 INCAS. MODULO DIFF. 2700K 2352mm WHT + A.24 SCHERMO DIFF. OPALINO

Measurement

Code FTS1801934-A
 Name A.24 INCAS. MODULO DIFF. 2700K 2352mm WHT + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	6445 lm	Luminaire Power	58.0 W	Efficacy	111.121 lm/W	Efficiency	100.00%
Source Flux	6445 lm	Maximum value	347.31 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	2352 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.051744 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.012518 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6445 lm	


LED Flux=9383lm LED Power=53W Eff=69% EfcLed=176lm/W EfcLum=111lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 47 78 95 100 100
 F UTE 1.00 E

D DIN 5040
 B NBN

A30
 BZ 5


2352mm x 27mm



Sempiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 0.01 %
 DLOR 99.99 %
 RN 0.01 %

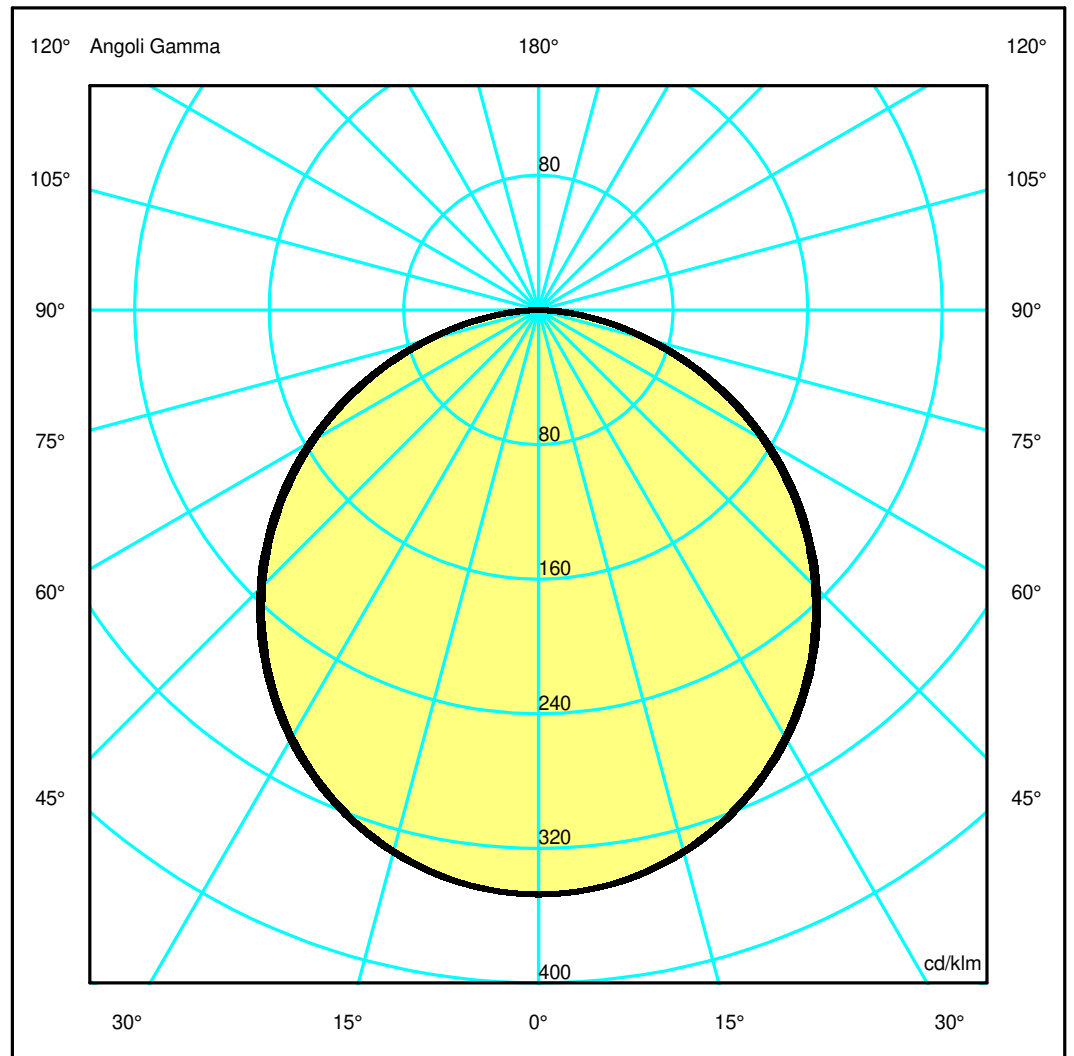

Luminaire

Code AQ27101+AQ16XXX
 Name A.24 INCAS. MODULO DIFF. 2700K 2352mm WHT + A.24 SCHERMO DIFF. OPALINO

Measurerm.

Code FTS1801934-A
 Name A.24 INCAS. MODULO DIFF. 2700K 2352mm WHT + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	6445 lm	Luminaire Power	58.0 W	Efficacy	111.121 lm/W	Efficiency	100.00%
Source Flux	6445 lm	Maximum value	347.31 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	2352 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.051744 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.012518 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6445 lm	


LED Flux=9383lm LED Power=53W Eff=69% EfcLed=176lm/W EfcLum=111lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	47 78 95 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 5

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.01	4.52	6.02	7.53	OC	1.54	3.08	4.62	6.16	7.70
OB	1.51	3.01	4.52	6.02	7.53	OD	1.54	3.08	4.62	6.16	7.70

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2238.42	2228.12	2146.03	1990.13	1771.06	1493.78	1165.14	808.50	429.31	105.54
OB	2238.42	2228.12	2146.03	1990.13	1771.06	1493.78	1165.14	808.50	429.31	105.54
OC	2238.42	2228.39	2150.46	2001.50	1783.88	1511.32	1190.15	826.74	440.05	116.22
OD	2238.42	2228.39	2150.46	2001.50	1783.88	1511.32	1190.15	826.74	440.05	116.22

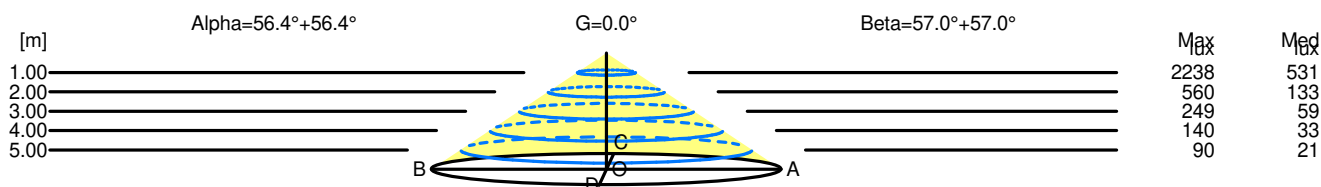

H[m]	D[m]	Max lux	Med lux	Alpha=56.4°+56.4°	G=0.0
1.00	3.01	2238	531		
2.00	6.02	560	133		
3.00	9.03	249	59		
4.00	12.04	140	33		
5.00	15.05	90	21		

H[m]	D[m]	Max lux	Med lux	Beta=57.0°+57.0°	G=0.0
1.00	3.08	2238	531		
2.00	6.16	560	133		
3.00	9.24	249	59		
4.00	12.32	140	33		
5.00	15.40	90	21		