


## Luminaire

Code AQ31415+AQ90XXX  
 Name A.24 PLAF. MOD.DIFF.ANG.90° 3000K BR.SLV + A.24 SCHERMO DIFF. OPALINO FLESSIB.


## Measurement

Code FTS2300220  
 Name A.24 PLAF. MOD.DIFF.ANG.90° 3000K BR.SLV + A.24 SCHERMO DIFF. OPALINO FLESSIB.

Luminaire Flux	1507 lm	Luminaire Power	14.0 W	Efficacy	107.643 lm/W	Efficiency	100.00%
Source Flux	1507 lm	Maximum value	350.51 cd/klm	Position	C=60.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	315 mm	Width	315 mm	Height	55 mm
Rectangular Luminous Area		Length	111 mm	Width	111 mm	Height	0 mm
Horizontal Luminous Area		0.012321 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.002981 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1507 lm	
LED Flux=2488lm LED Power=13W Eff=61% EfcLed=187lm/W EfcLum=108lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	47 79 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 5 / 1.25 / BZ 4		

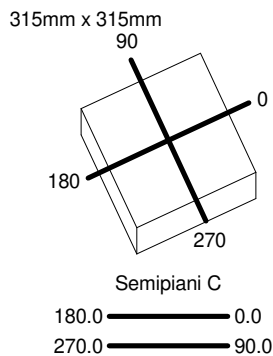

ULOR 0.01 %  
 DLOR 99.99 %  
 RN 0.01 %

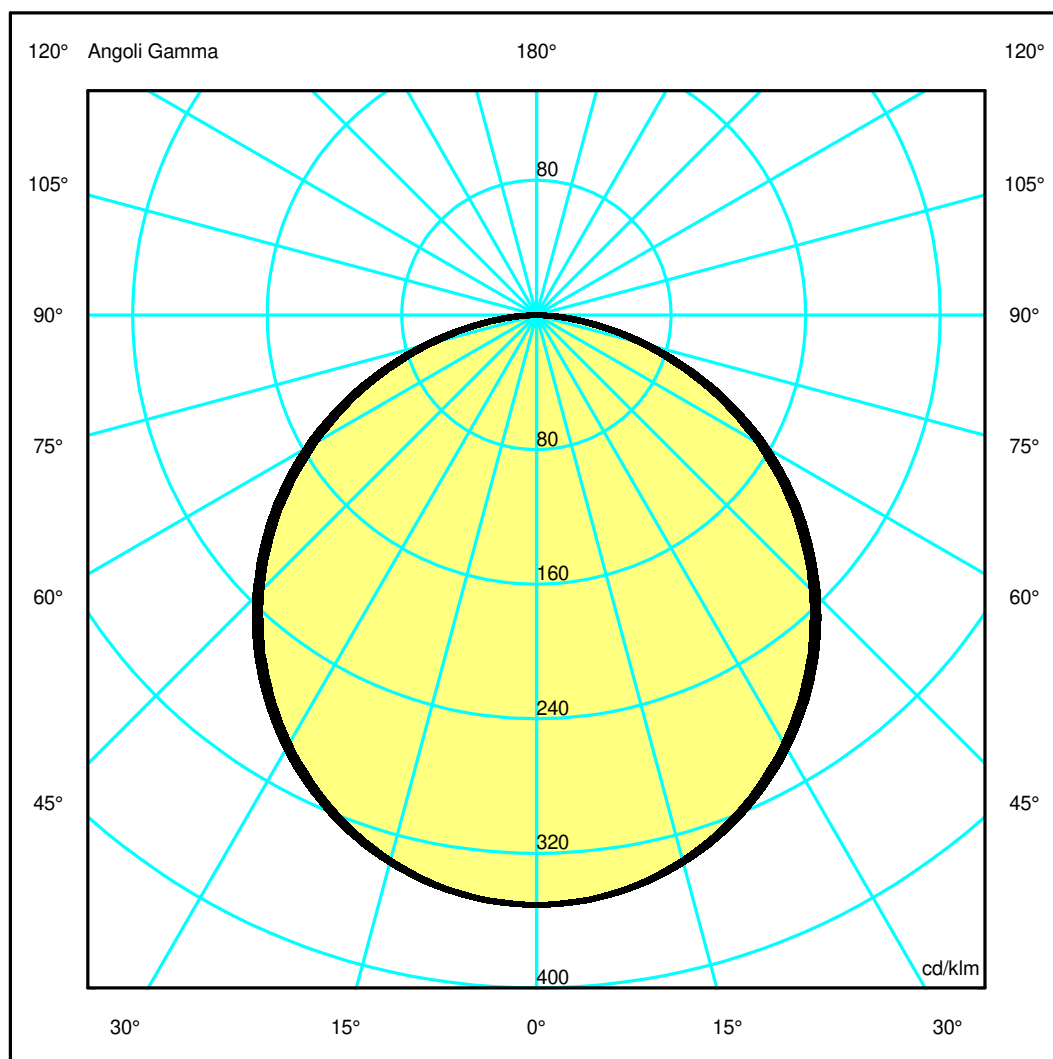

## Luminaire

Code AQ31415+AQ90XXX  
 Name A.24 PLAF. MOD.DIFF.ANG.90° 3000K BR.SLV + A.24 SCHERMO DIFF. OPALINO FLESSIB.

## Measurement

Code FTS2300220  
 Name A.24 PLAF. MOD.DIFF.ANG.90° 3000K BR.SLV + A.24 SCHERMO DIFF. OPALINO FLESSIB.

Luminaire Flux	1507 lm	Luminaire Power	14.0 W	Efficacy	107.643 lm/W	Efficiency	100.00%
Source Flux	1507 lm	Maximum value	350.51 cd/klm	Position	C=60.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	315 mm	Width	315 mm	Height	55 mm
Rectangular Luminous Area		Length	111 mm	Width	111 mm	Height	0 mm
Horizontal Luminous Area		0.012321 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.002981 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1507 lm	


LED Flux=2488lm LED Power=13W Eff=61% EfcLed=187lm/W EfcLum=108lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	47 79 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 5 / 1.25 / BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.48	2.96	4.43	5.91	7.39	OC	1.54	3.07	4.61	6.15	7.68
OB	1.48	2.96	4.43	5.91	7.39	OD	1.54	3.07	4.61	6.15	7.68

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	528.20	525.70	505.85	467.99	414.83	348.85	271.08	185.33	97.07	21.73
OB	528.20	525.70	505.85	467.99	414.83	348.85	271.08	185.33	97.07	21.73
OC	528.20	526.02	507.57	472.13	421.19	356.44	279.82	194.33	102.98	26.27
OD	528.20	526.02	507.57	472.13	421.19	356.44	279.82	194.33	102.98	26.27

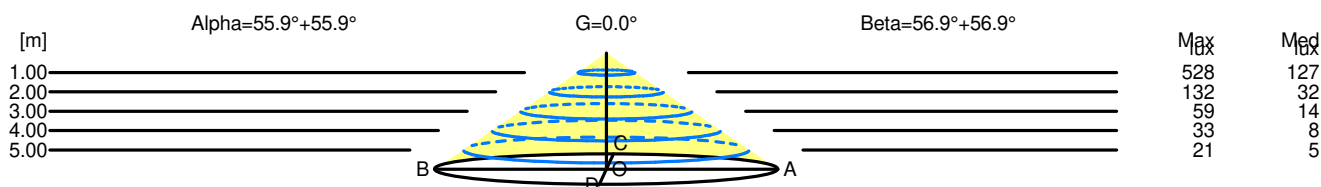

H[m]	D[m]	Max lux	Med lux	Alpha=55.9°+55.9°	G=0.0
1.00	2.96	528	127		
2.00	5.91	132	32		
3.00	8.87	59	14		
4.00	11.82	33	8		
5.00	14.78	21	5		

H[m]	D[m]	Max lux	Med lux	Beta=56.9°+56.9°	G=0.0
1.00	3.07	528	127		
2.00	6.15	132	32		
3.00	9.22	59	14		
4.00	12.29	33	8		
5.00	15.36	21	5		