

Luminaire

Code AQ37015+AQ16XXX
 Name A.24 PLAF. MOD. DIFF. 2700K 1176mm BSV + A.24 SCHERMO DIFF. OPALINO

Measurement

Code FTS1801932-A
 Name A.24 PLAF. MOD. DIFF. 2700K 1176mm BSV + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	3222 lm	Luminaire Power	29.0 W	Efficacy	111.103 lm/W	Efficiency	100.00%
Source Flux	3222 lm	Maximum value	347.31 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	1176 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.025872 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.006259 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3222 lm	


LED Flux=4692lm LED Power=27W Eff=69% EfcLed=176lm/W EfcLum=111lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 47 78 95 100 100
 F UTE 1.00 E

D DIN 5040
 B NBN

A30
 BZ 5


1176mm x 27mm



Semipiani C

180.0 ——— 0.0
 270.0 ——— 90.0

ULOR 0.01 %
 DLOR 99.99 %
 RN 0.01 %

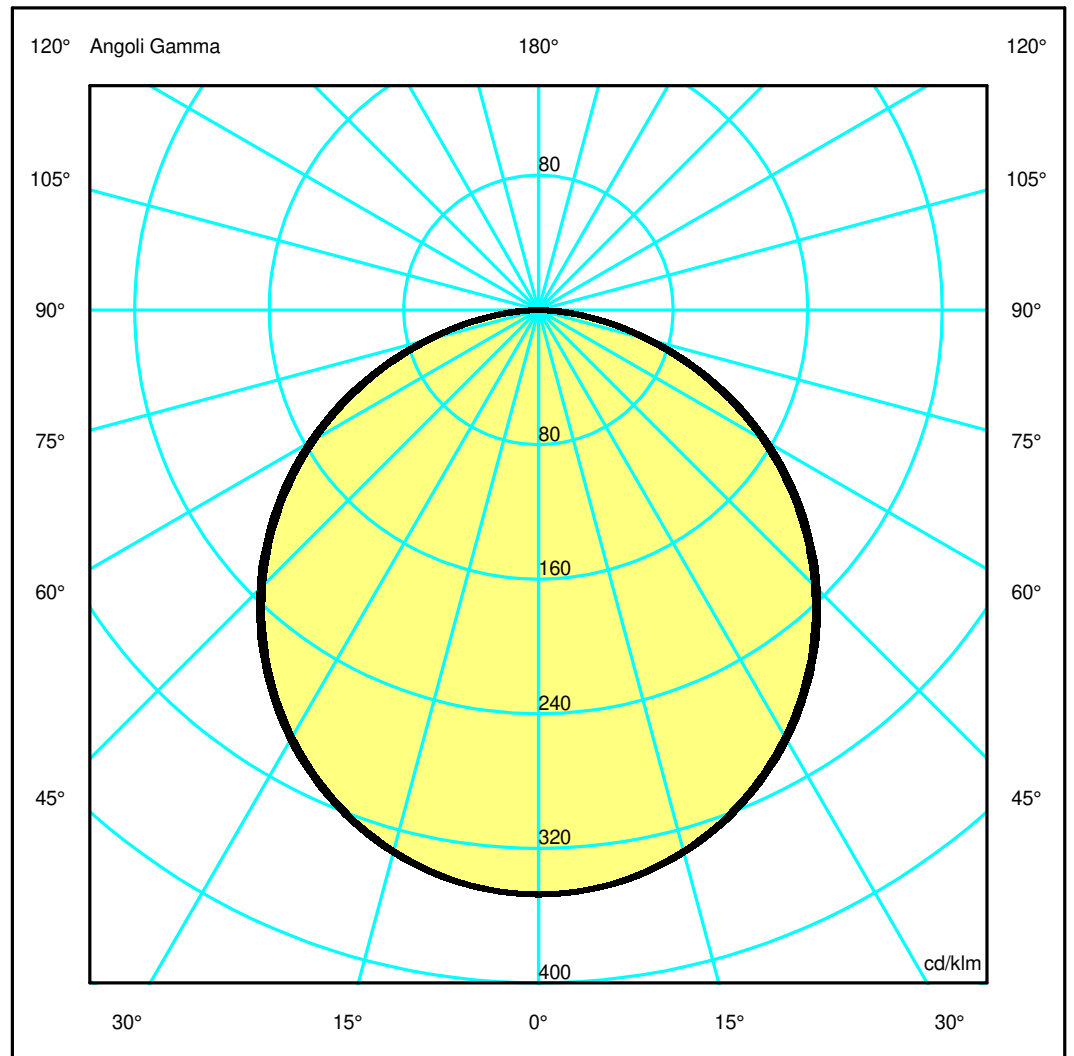

Luminaire

Code AQ37015+AQ16XXX
 Name A.24 PLAF. MOD. DIFF. 2700K 1176mm BSV + A.24 SCHERMO DIFF. OPALINO

Measurerm.

Code FTS1801932-A
 Name A.24 PLAF. MOD. DIFF. 2700K 1176mm BSV + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	3222 lm	Luminaire Power	29.0 W	Efficacy	111.103 lm/W	Efficiency	100.00%
Source Flux	3222 lm	Maximum value	347.31 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	1176 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.025872 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006259 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3222 lm	

LED Flux=4692lm LED Power=27W Eff=69% EfcLed=176lm/W EfcLum=111lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h


C.I.E. 47 78 95 100 100
 F UTE 1.00 E

D DIN 5040
 B NBN
 A30
 BZ 5

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.01	4.52	6.02	7.53	OC	1.54	3.08	4.62	6.16	7.70
OB	1.51	3.01	4.52	6.02	7.53	OD	1.54	3.08	4.62	6.16	7.70

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1119.04	1113.89	1072.85	994.91	885.39	746.78	582.48	404.19	214.62	52.76
OB	1119.04	1113.89	1072.85	994.91	885.39	746.78	582.48	404.19	214.62	52.76
OC	1119.04	1114.02	1075.06	1000.60	891.80	755.54	594.99	413.31	219.99	58.10
OD	1119.04	1114.02	1075.06	1000.60	891.80	755.54	594.99	413.31	219.99	58.10

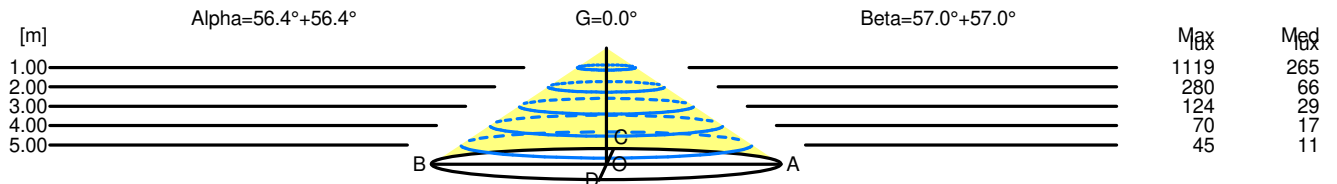

H[m]	D[m]	Max lux	Med lux	Alpha=56.4°+56.4°	G=0.0
1.00	3.01	1119	265		
2.00	6.02	280	66		
3.00	9.03	124	29		
4.00	12.04	70	17		
5.00	15.05	45	11		

H[m]	D[m]	Max lux	Med lux	Beta=57.0°+57.0°	G=0.0
1.00	3.08	1119	265		
2.00	6.16	280	66		
3.00	9.24	124	29		
4.00	12.32	70	17		
5.00	15.40	45	11		