

## Luminaire

Code AQ41320+AQ16XXX  
 Name A.24 SOSP. MODULO DIR. DIFF. 4000K 2352mm BBRZ + A.24 SCHERMO DIFF. OPALINO

## Measurement

Code FTS2300186  
 Name A.24 SOSP. MODULO DIR. DIFF. 4000K 2352mm BBRZ + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	5685 lm	Luminaire Power	58.0 W	Efficacy	98.017 lm/W	Efficiency	100.00%
Source Flux	5685 lm	Maximum value	349.78 cd/klm	Position	C=90.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	2352 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.051744 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.012518 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5685 lm	


LED Flux=9952lm LED Power=53W Eff=57% EfcLed=187lm/W EfcLum=98lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 47 79 96 100 100  
 F UTE 1.00 E

D DIN 5040  
 B NBN

A30  
 BZ 5 / 2 / BZ 4


2352mm x 27mm



Semipiani C

180.0 ——— 0.0  
 270.0 ——— 90.0

ULOR 0.01 %  
 DLOR 99.99 %  
 RN 0.01 %

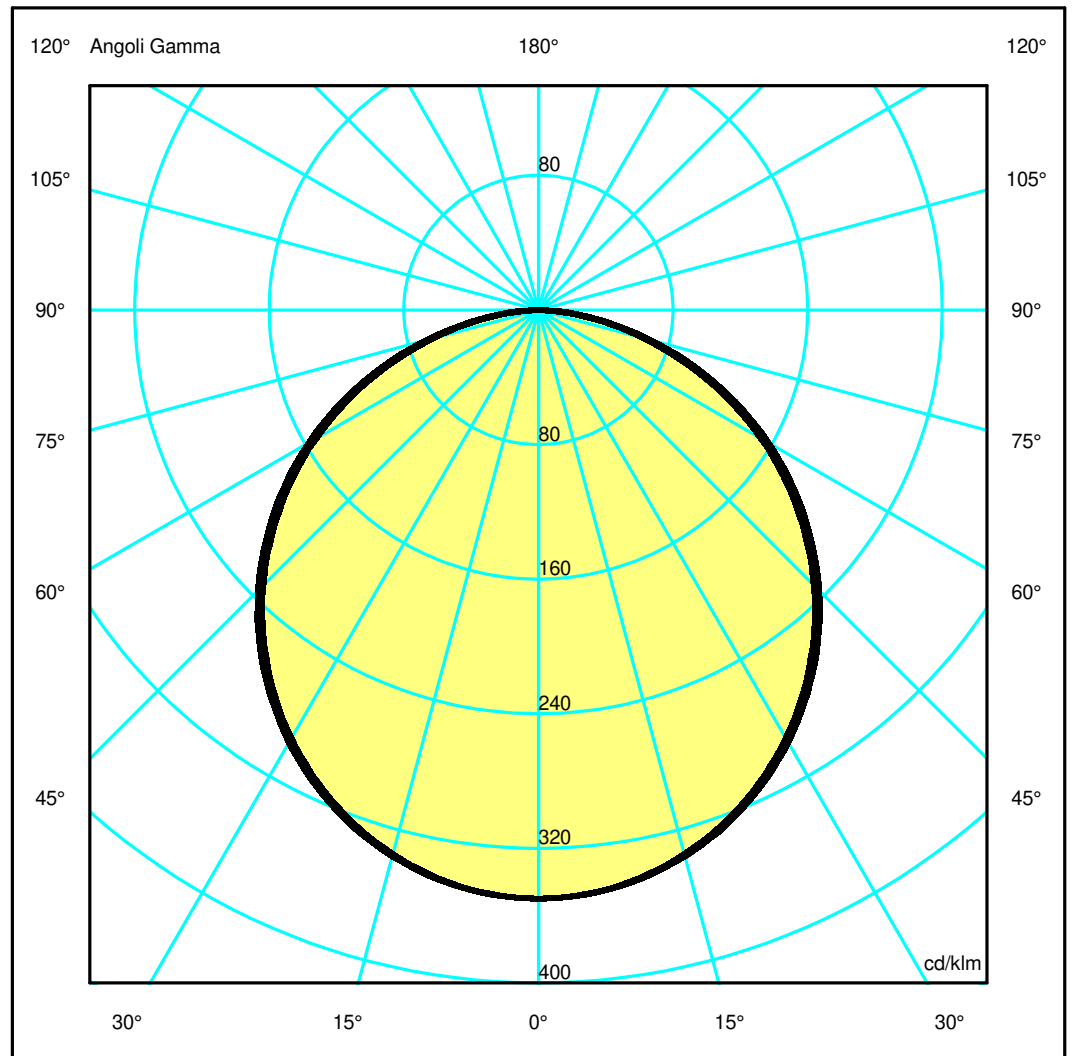

## Luminaire

Code AQ41320+AQ16XXX  
 Name A.24 SOSP. MODULO DIR. DIFF. 4000K 2352mm BBRZ + A.24 SCHERMO DIFF. OPALINO

## Measurement

Code FTS2300186  
 Name A.24 SOSP. MODULO DIR. DIFF. 4000K 2352mm BBRZ + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	5685 lm	Luminaire Power	58.0 W	Efficacy	98.017 lm/W	Efficiency	100.00%
Source Flux	5685 lm	Maximum value	349.78 cd/klm	Position	C=90.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	2352 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area	0.051744 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.012518 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	20-09-2023			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		5685 lm	


LED Flux=9952lm LED Power=53W Eff=57% EfcLed=187lm/W EfcLum=98lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	47 79 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 5 / 2 / BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.48	2.97	4.45	5.94	7.42	OC	1.54	3.07	4.61	6.15	7.69
OB	1.48	2.97	4.45	5.94	7.42	OD	1.54	3.07	4.61	6.15	7.69

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1988.47	1978.59	1903.08	1762.77	1565.02	1315.15	1026.29	701.36	367.14	80.79
OB	1988.47	1978.59	1903.08	1762.77	1565.02	1315.15	1026.29	701.36	367.14	80.79
OC	1988.47	1979.78	1911.16	1775.58	1584.63	1340.76	1053.05	732.38	391.75	102.80
OD	1988.47	1979.78	1911.16	1775.58	1584.63	1340.76	1053.05	732.38	391.75	102.80

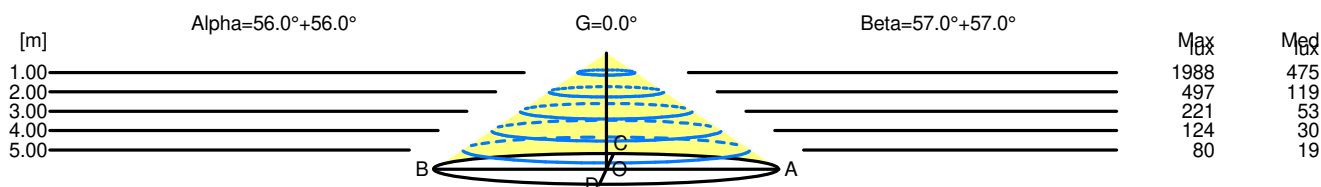

H[m]	D[m]	Max lux	Med lux	Alpha=56.0°+56.0°	G=0.0
1.00	2.97	1988	475		
2.00	5.94	497	119		
3.00	8.90	221	53		
4.00	11.87	124	30		
5.00	14.84	80	19		

H[m]	D[m]	Max lux	Med lux	Beta=57.0°+57.0°	G=0.0
1.00	3.07	1988	475		
2.00	6.15	497	119		
3.00	9.22	221	53		
4.00	12.30	124	30		
5.00	15.37	80	19		