

Luminaire

Code AQ44518
Name A.24 SOSP.MOD.D.SHARP 2700K XF 2352 BCOP

Measurement

Code FTS1802281-B
Name A.24 SOSP.MOD.D.SHARP 2700K XF 2352 BCOP

Luminaire Flux	3437 lm	Luminaire Power	45.0 W	Efficacy	76.377 lm/W	Efficiency	100.00%
Source Flux	3437 lm	Maximum value	1052.56 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	516 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.006192 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.001498 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		17-11-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3437 lm	


LED Flux=3972lm LED Power=38W Eff=87% EfcLed=105lm/W EfcLum=76lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h

C.I.E. 98 100 100 100 100
F UTE --

D DIN 5040
B NBN

A60
BZ 1


2352mm x 27mm



Sempiani C

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

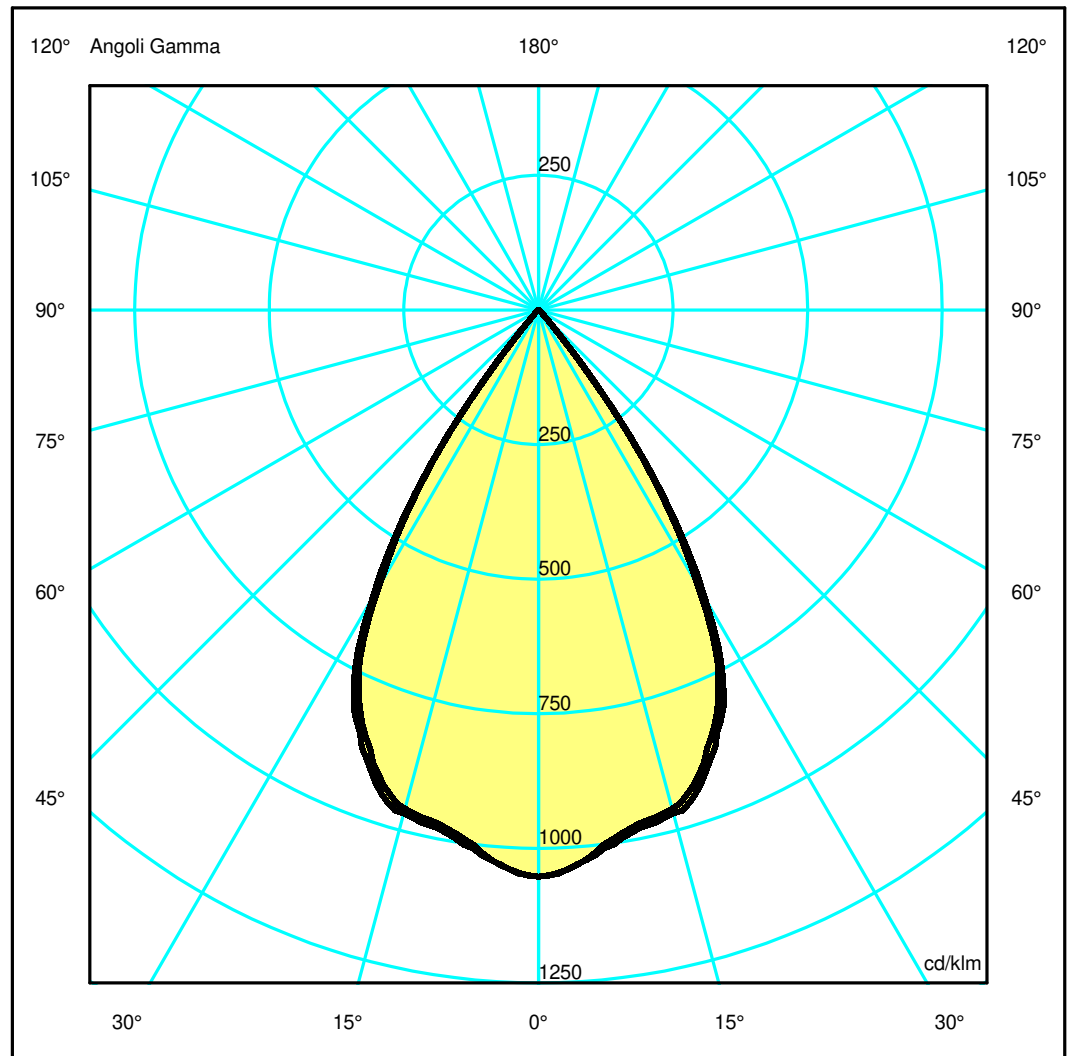

Luminaire

Code AQ44518
Name A.24 SOSP.MOD.D.SHARP 2700K XF 2352 BCOP

Measurerm.


Code FTS1802281-B
Name A.24 SOSP.MOD.D.SHARP 2700K XF 2352 BCOP

Luminaire Flux	3437 lm	Luminaire Power	45.0 W	Efficacy	76.377 lm/W	Efficiency	100.00%
Source Flux	3437 lm	Maximum value	1052.56 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	516 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area	0.006192 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.001498 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	17-11-2021			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		3437 lm	
LED Flux=3972lm LED Power=38W Eff=87% EfcLed=105lm/W EfcLum=76lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.61	1.22	1.83	2.44	3.05	OC	0.62	1.24	1.87	2.49	3.11
OB	0.61	1.22	1.83	2.44	3.05	OD	0.62	1.24	1.87	2.49	3.11

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3617.61	3519.07	3294.86	2719.00	1165.40	44.42	9.35	2.50	0.00	0.00
OB	3617.61	3519.07	3294.86	2719.00	1165.40	44.42	9.35	2.50	0.00	0.00
OC	3617.61	3523.37	3325.61	2795.13	1211.75	43.13	9.27	2.64	0.00	0.00
OD	3617.61	3523.37	3325.61	2795.13	1211.75	43.13	9.27	2.64	0.00	0.00

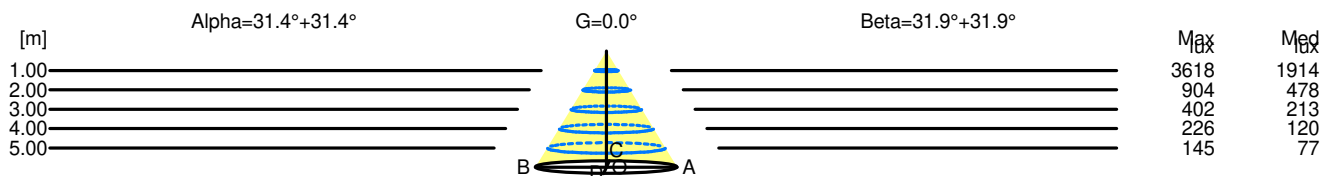

H[m]	D[m]	Max lux	Med lux	Alpha=31.4°+31.4°	G=0.0
1.00	1.22	3618	1914		
2.00	2.44	904	478		
3.00	3.66	402	213		
4.00	4.88	226	120		
5.00	6.10	145	77		

H[m]	D[m]	Max lux	Med lux	Beta=31.9°+31.9°	G=0.0
1.00	1.24	3618	1914		
2.00	2.49	904	478		
3.00	3.73	402	213		
4.00	4.98	226	120		
5.00	6.22	145	77		